

## Part No.: RS16W0830-S

Power divider/Combiner 16 Way SMA 50Ω 0.8 to 3GHz

### 电气特性 Electrical:


工作频率 Frequency Range: 0.8-3GHz  
插入损耗 Insertion Loss:  $\leq 1.8\text{dB}$   
驻波 VSWR:  $\leq 1.40 : 1$   
隔离 Isolation:  $\geq 18\text{dB}$   
幅度平衡 Amplitude Balance:  $\leq \pm 0.9\text{dB}$   
相位平衡 Phase Balance:  $\leq \pm 15^\circ$   
耐功率 Power Handling: 30 Watt  
阻抗 Impedance: 50 OHMS

### 机械特性 Mechanical:

温度范围 Temperature Range:  $-55^\circ\text{C} - +85^\circ\text{C}$   
接口 Connectors: SMA-Female  
相对湿度 Relative Humidity: 0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

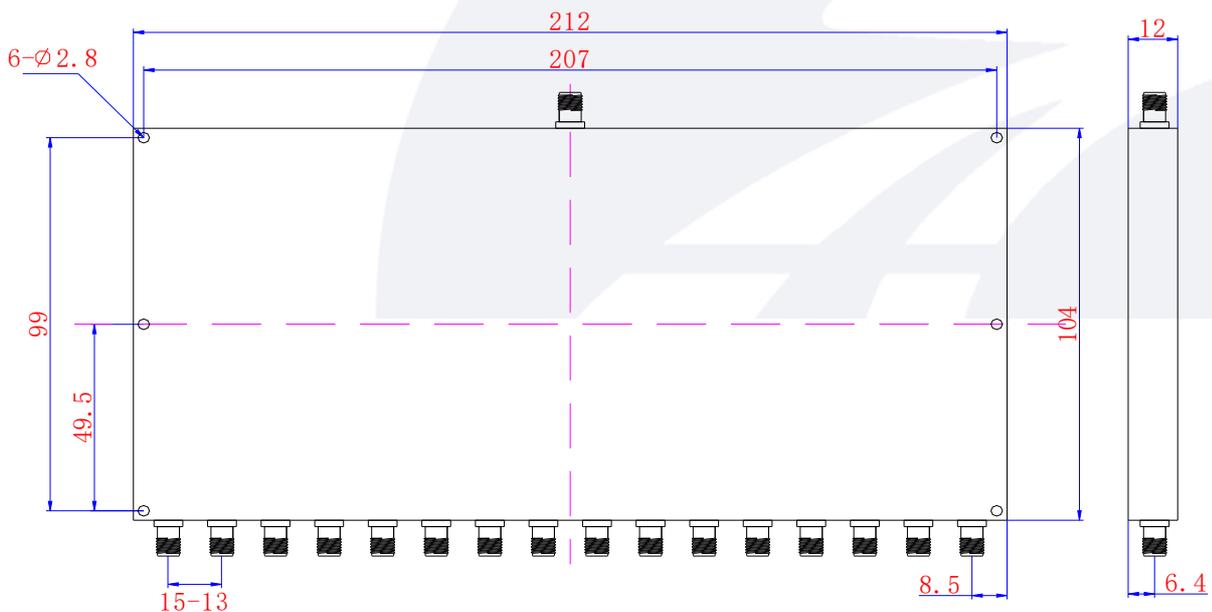



Turpanic Co, Ltd

Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)

Mob/WeChat/WhatsApp: +8613088887527