

Power divider/Combiner 16 Way SMA 50Ω 0.8 to 6GHz

电气特性 Electrical:

工作频率 Frequency Range: 0.8-6GHz

插入损耗 Insertion Loss: $\leq 4.8\text{dB}$

驻波 VSWR: 1.7 : 1

隔离 Isolation: $\geq 16\text{dB}$

幅度平衡 Amplitude Balance: $\leq \pm 1.0\text{dB}$

相位平衡 Phase Balance: $\leq \pm 10^\circ$ (Typ)
 $\leq \pm 15^\circ$ (MAX)

耐功率 Power Handling: 30 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical:


温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

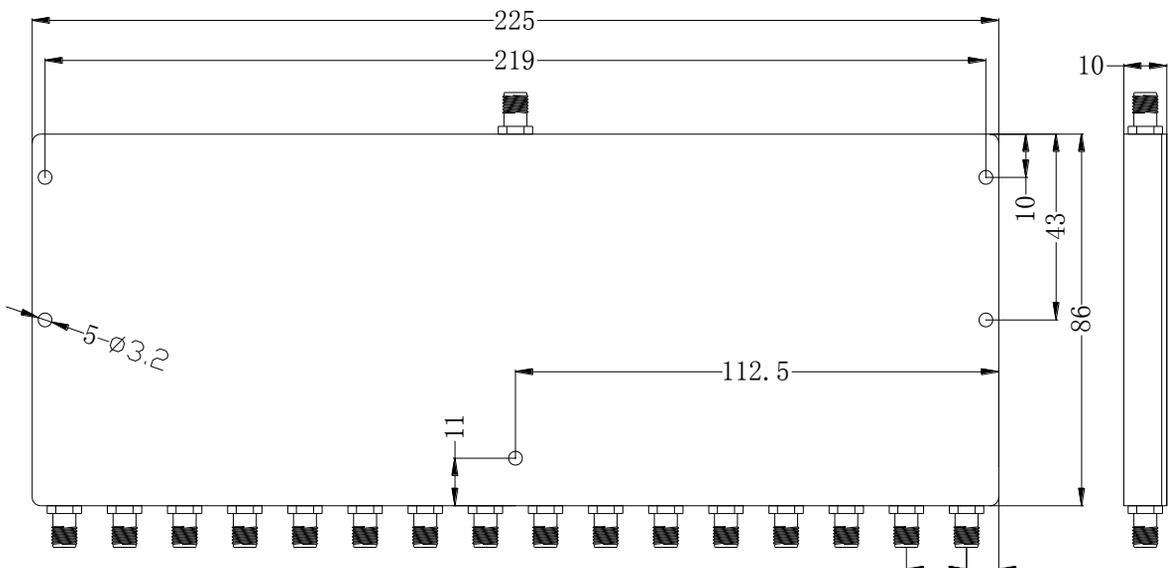



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527