

Power Divider /Combiner 16 Way SMA 50Ω 14 to 18 GHz

电气特性 Electrical:

工作频率 Frequency Range: 14-18GHz

插入损耗 Insertion Loss: ≤3.0dB

(不包含理论Loss)

驻波 VSWR: ≤1.50/1.5 : 1

隔离 Isolation: ≥15dB

幅度平衡 Amplitude Balance: ≤±0.8dB

相位平衡 Phase Balance: ≤±8°

耐功率 Power Handling: 30 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range: -55° C - +85° C

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

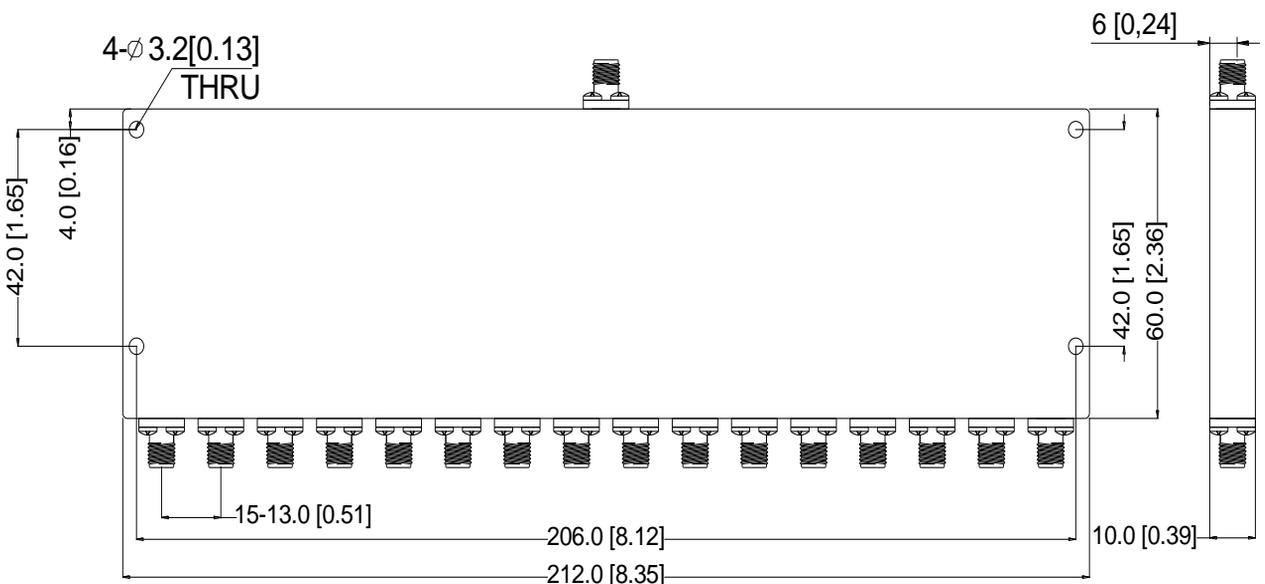



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527