

Power divider/Combiner 16 Way SMA 50Ω 2 to 18GHz


电气特性 Electrical:

工作频率 Frequency Range:	2-18GHz
插入损耗 Insertion Loss:	≤3dB
驻波 VSWR:	≤2.0 /1.8: 1
隔离 Isolation:	≥15dB
幅度平衡 Amplitude Balance:	≤±1.2dB
相位平衡 Phase Balance:	≤±10°
耐功率 Power Handling:	30 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range:	-55° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

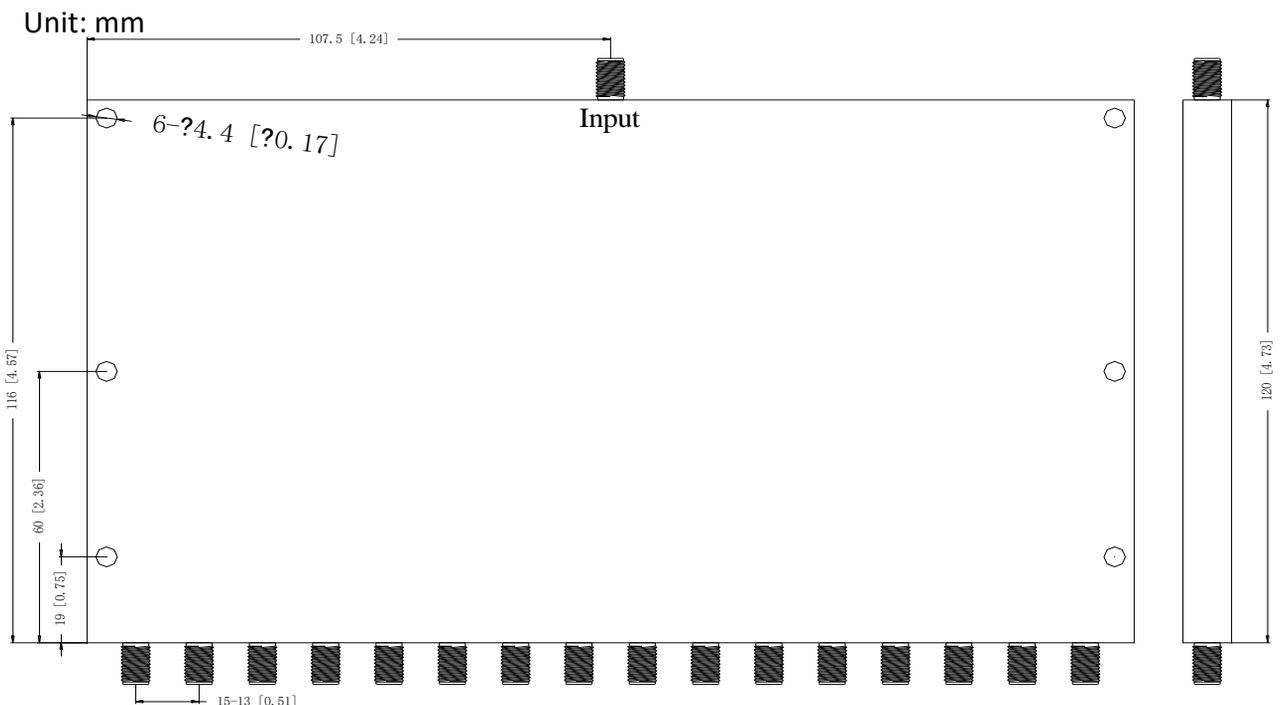

Trc2 S12 dB Mag 4 dB / Ref -16 dB Cal Invisible
 Mem6[Trc2] S12 dB Mag 4 dB / Ref -16 dB Invisible

2 of 4 (Max)

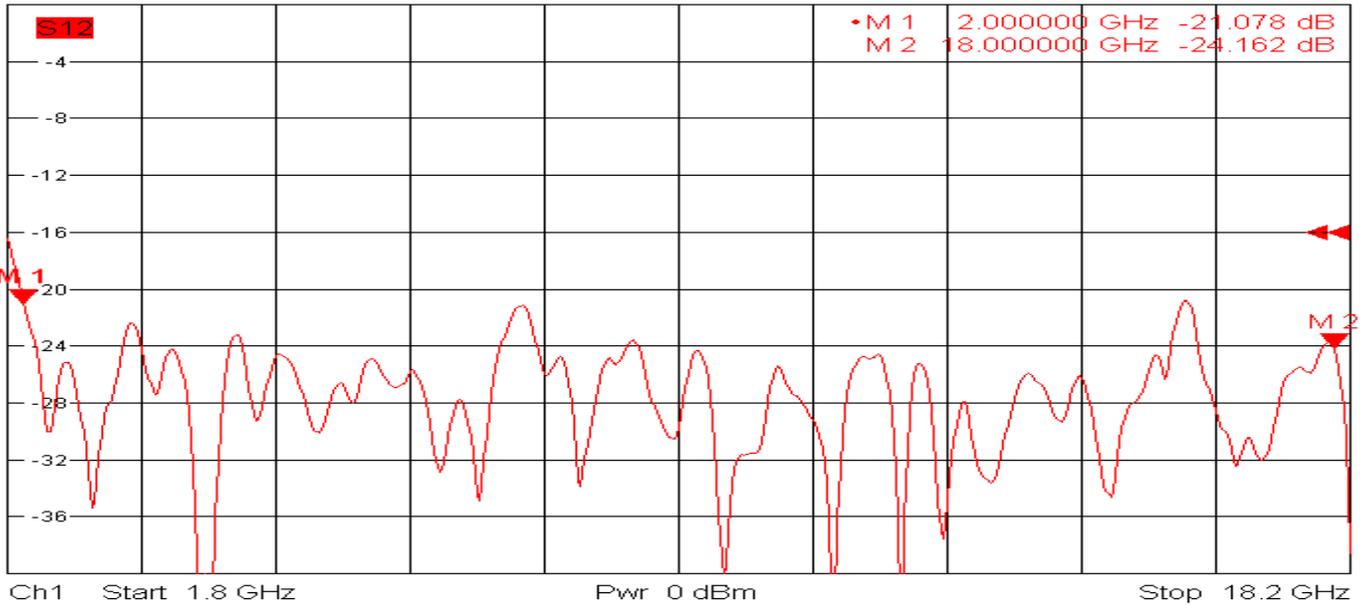

11/16/2019, 10:43 AM