

Power Divider /Combiner 2 Way SMA 50Ω 0.4 to 18GHz

电气特性 Electrical:

工作频率 Frequency Range: 0.4-18 GHz

插入损耗 Insertion Loss: $\leq 1.3\text{dB}$

驻波 VSWR: $\leq 1.80 : 1$

隔离 Isolation: $\geq 12\text{dB}(400\text{M}-500\text{M})$
 $\geq 15\text{dB}(600\text{M}-18000\text{M})$

幅度平衡 Amplitude Balance: $\leq \pm 0.5\text{dB}$

相位平衡 Phase Balance: $\leq \pm 5^\circ$

耐功率 Power Handling: 5 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

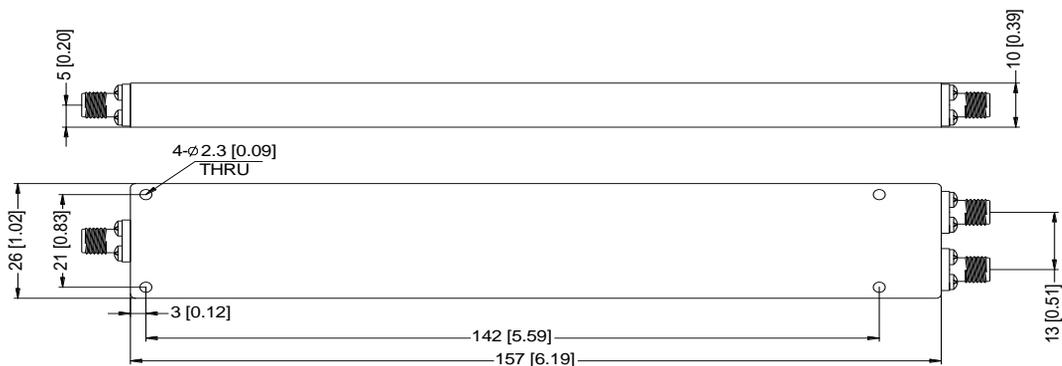

Trc2 S21 dB Mag 2 dB / Ref -18 dB Cal 2 of 4 (Max)
Mem6[Trc2] S21 dB Mag 2 dB / Ref -18 dB Invisible

