

## Power divider/Combiner 2 Way SMA 50Ω 0.5 to 6 GHz

### 电气特性 Electrical:

工作频率 Frequency Range: 0.5-6 GHz

插入损耗 Insertion Loss:  $\leq 1.1\text{dB}$

驻波 VSWR:  $\leq 1.4: 1$

隔离 Isolation:  $\geq 18\text{dB}$

幅度平衡 Amplitude Balance:  $\leq \pm 0.3\text{dB}$

相位平衡 Phase Balance:  $\leq \pm 5^\circ$

耐功率 Power Handling: 50 Watt

方向功率 Reverse Power : 2 Watt

阻抗 Impedance: 50 OHMS

### 机械特性 Mechanical :


温度范围 Temperature Range:  $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

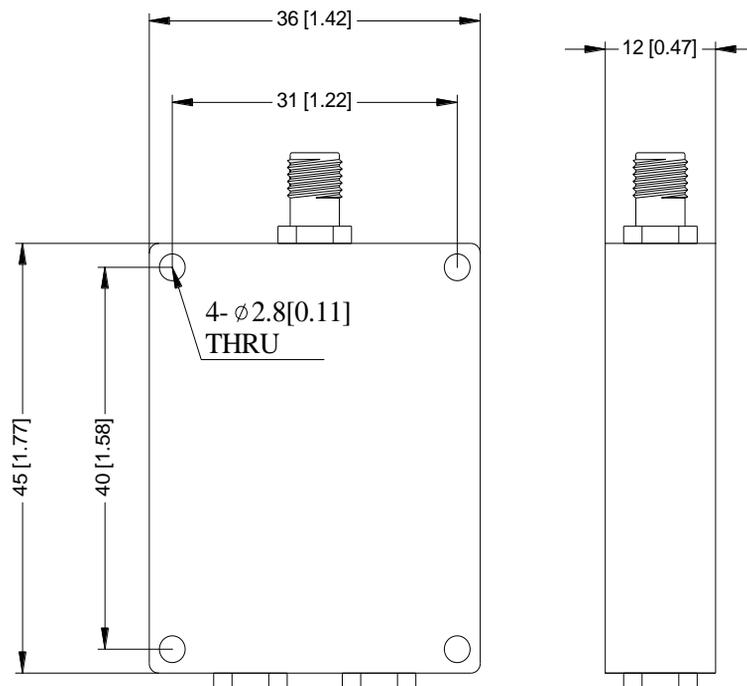



Turpanic Co, Ltd

Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)

Mob/WeChat/WhatsApp: +8613088887527