

Power Divider/Combiner 2 Way SMA 50Ω 1 to 50 GHz

电气特性 Electrical:


工作频率 Frequency Range: 1-50GHz
 插入损耗 Insertion Loss: $\leq 4.5\text{dB}$
 驻波 VSWR: Input: ≤ 1.8 , 1.6 typ
 Output: ≤ 1.6
 隔离 Isolation: @1-45GHz: $\geq 18\text{dB}$
 @45-50GHz: $\geq 12\text{dB}$, 14dB Typ
 幅度平衡 Amplitude Balance: $\leq \pm 0.5\text{dB}$,
 相位平衡 Phase Balance: $\leq \pm 6^\circ$
 耐功率 Power Handling: 10 Watt
 阻抗 Impedance: 50 OHMS

机械特性 Mechanical :

温度范围 Temperature Range: $-45^\circ\text{C} - +85^\circ\text{C}$
 接口 Connectors: 2.4-Female
 相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

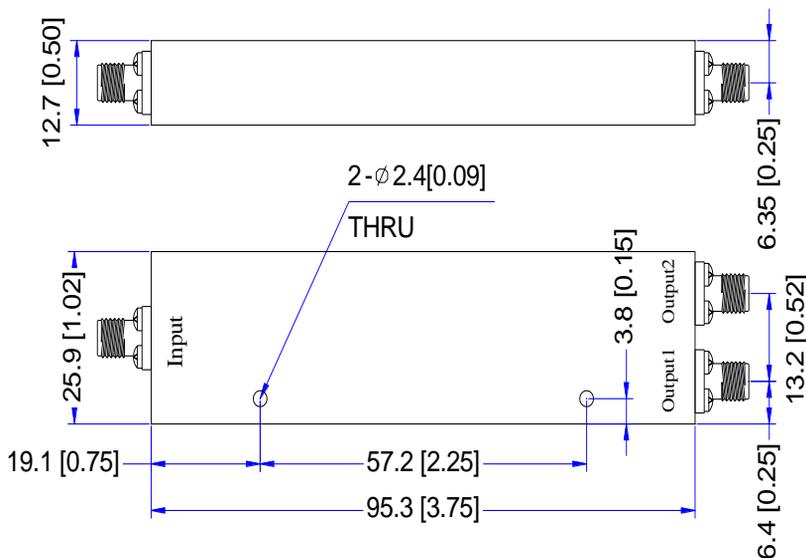



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527