

Power divider/Combiner 2 Way SMA 50Ω 18 to 26.5 GHz

电气特性 Electrical:

工作频率 Frequency Range: 18-26.5 GHz

插入损耗 Insertion Loss: $\leq 0.6\text{dB}$

驻波 VSWR: $\leq 1.4 : 1$

隔离 Isolation: $\geq 18\text{dB}$

幅度平衡 Amplitude Balance: $\leq \pm 0.3\text{dB}$

相位平衡 Phase Balance: $\leq \pm 3^\circ$

耐功率 Power Handling: 20 Watt

方向功率 Reverse Power : 2 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

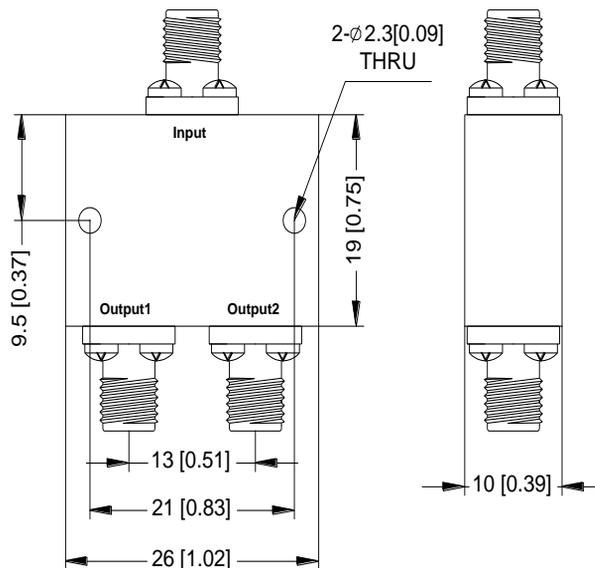



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527