

## Power Divider /Combiner 3 Way 2.92 50Ω 26 to 28.8 GHz

### 电气特性 Electrical:

工作频率 Frequency Range: 26-28.8 GHz

插入损耗 Insertion Loss:  $\leq 1.0\text{dB}$

驻波 VSWR:  $\leq 1.5 : 1$

隔离 Isolation:  $\geq 18\text{dB}$

幅度平衡 Amplitude Balance:  $\leq \pm 0.5\text{dB}$

相位平衡 Phase Balance:  $\leq \pm 4^\circ$

耐功率 Power Handling: 30 Watt

方向功率 Reverse Power : 2 Watt

阻抗 Impedance: 50 OHMS

### 机械特性 Mechanical :


温度范围 Temperature Range:  $-55^\circ\text{C} - +85^\circ\text{C}$


接口 Connectors: 2.92-F

相对湿度 Relative Humidity: 0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

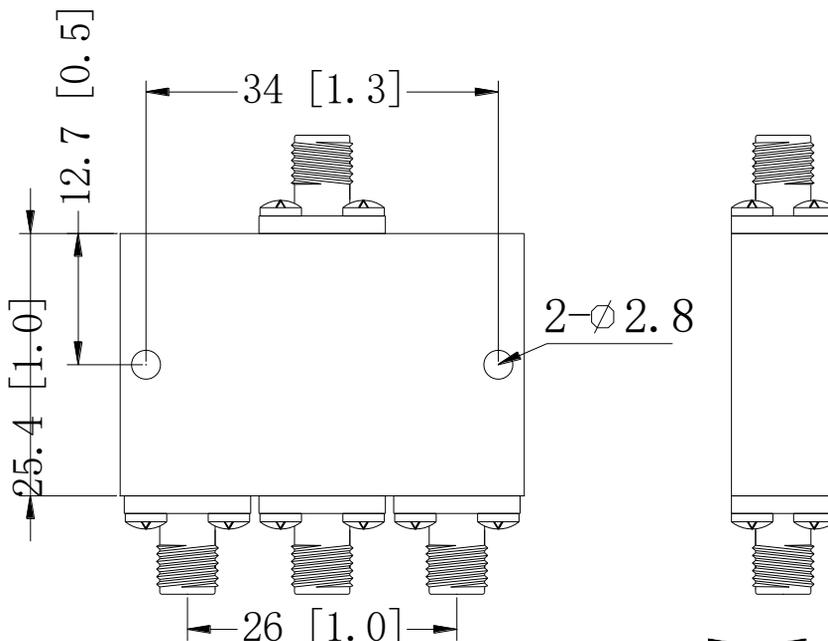

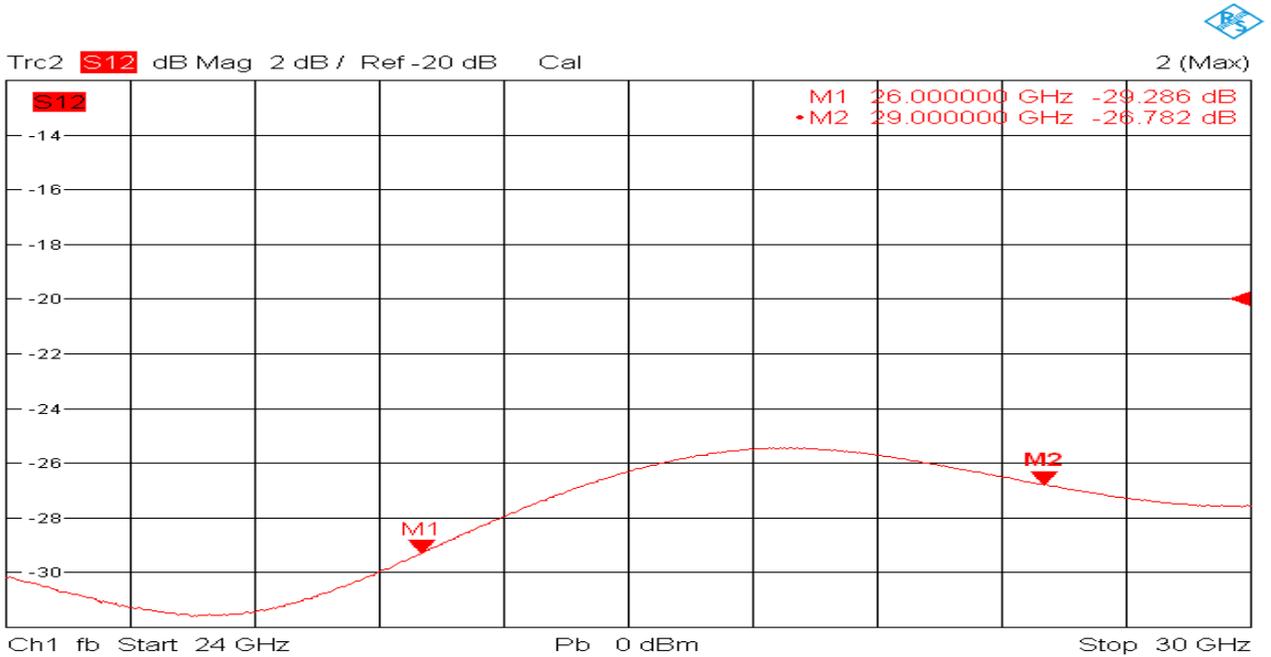

4/23/2016, 2:34 AM