

## Part No.: RS4DC30-S

Power Splitter/Combiner 4 Way SMA 50Ω DC to 3GHz

### 电气特性 Electrical:


工作频率 Frequency Range:	DC-3GHz
插入损耗 Insertion Loss:	$\leq 12\text{dB} \pm 0.8\text{dB}$
驻波 VSWR:	$\leq 1.30 : 1$
幅度平衡 Amplitude Balance:	$\leq \pm 0.8\text{dB}$
耐功率 Power Handling:	1 Watt
阻抗 Impedance:	50 OHMS

### 机械特性 Mechanical:

温度范围 Temperature Range:	$-55^{\circ}\text{C} - +85^{\circ}\text{C}$
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

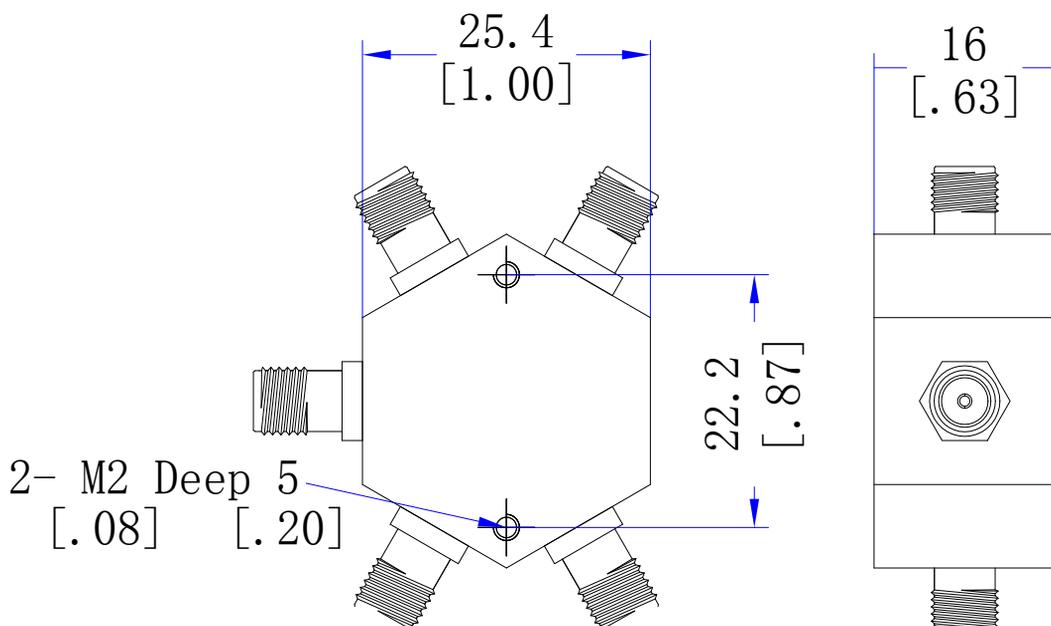



Turpanic Co, Ltd  
Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)  
Mob/WeChat/WhatsApp: +8613088887527