

Power Divider /Combiner 4 Way SMA 50Ω 0.4 to 18GHz

电气特性 Electrical:

工作频率 Frequency Range: 0.4-18 GHz

插入损耗 Insertion Loss: ≤2.6dB

驻波 VSWR: ≤2.4/1.6: 1

隔离 Isolation: ≥11dB(400M-500M)
 ≥15dB(600M-18000M)

幅度平衡 Amplitude Balance: ≤±0.9dB

相位平衡 Phase Balance: ≤±12°

耐功率 Power Handling: 5 Watt

阻抗 Impedance: 50 OHMS

机械特性 Mechanical :


温度范围 Temperature Range: -55° C - +85° C

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

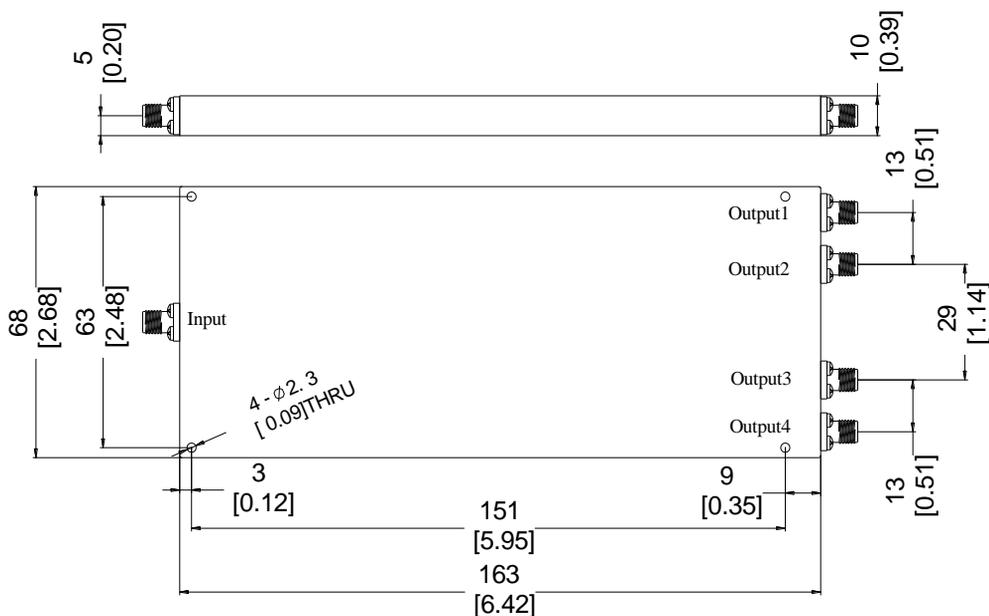



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527