


## 2.92mm Attenuators • Male to Female • DC – 32GHz - 100 W

### 电气特性 ELECTRICAL

- **Frequency Range** DC – 32GHz
- **Attenuation (dB)**
  - 10 ..... -2.0/+2.8dB
  - 20..... -1.5/+2.2dB
  - 30 ..... -1.2/+1.5 dB
  - 40 ..... -1.2/+1.5dB
- **VSWR (MAX)** DC – 32GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 100Watts Average at 25°C  
 PEAK: 500 Watts  
 (5 μSec Pulse Width , 10% Duty Cycle)

### 机械特性 MECHANICAL

- **Connectors** Passivated Stainless Steel or Brass , Gold Plated
- **Connector Pins** Beryllium Copper, Gold Plated

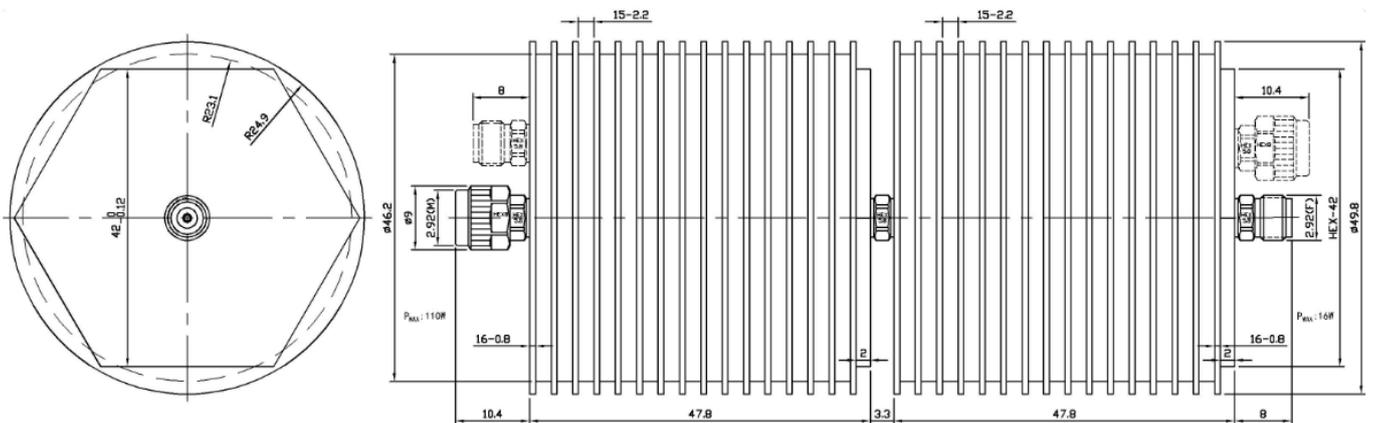


- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

Unit: mm

### 订货信息 ORDER

Model Number: TAXXA100-2.92-32

dB

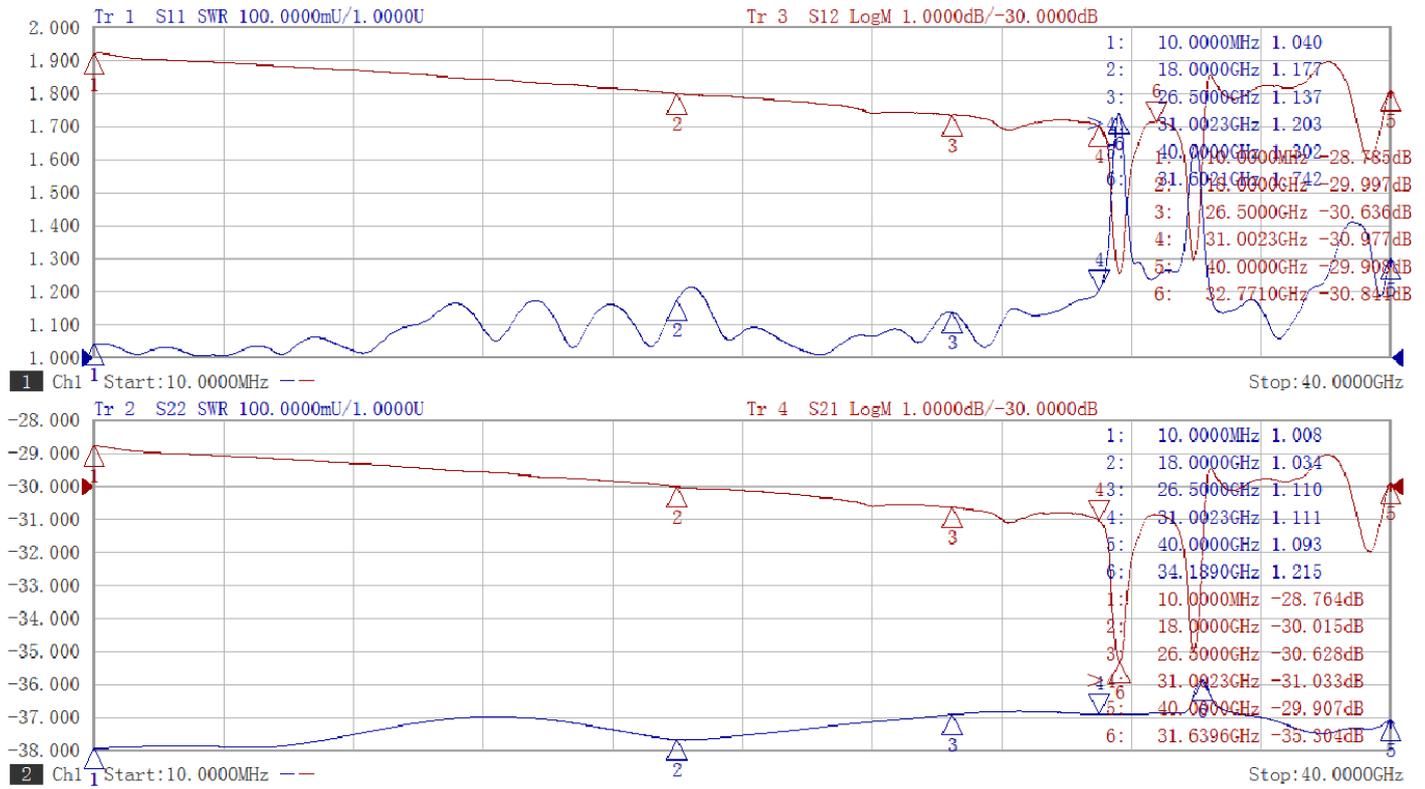

2021-11-12 14:07