

Coaxial Fixed Attenuator SMA Female&Male/DC-12.4GHz

Model:TAXXA100-S-12.4

TAXXA100-S-12.4 is a 3/6/10/20/30/40 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 12.4 GHz.

Features:

- Operating Frequency DC to 12.4GHz
- Broadband Coverage
- Lost Cost

Applications:

- Test Lab
- Instrumentations
- System Integration

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		12.4	GHz
衰减范围 Attenuation Range		3(-1.5/+2.5)		dB
		6(-1.5/+2.5)		dB
		10(-2.0/+2.5)		dB
		20(-1.5/+2.0)		dB
		30(-1.2/+2.0)		dB
		40(-1.2/+2.0)		dB
驻波 VSWR			1.35	:1
阻抗 Impedance		50		Ohms
射功率值 RF Power Rating	100 Watts Average at 25°C			


环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
壳体材质 Body Material	Black, finned aluminum	
连接器材质 Connector Material	Nickel plated brass	
内导体 Inner Conductor	Gold-plated, Phosphor bronze	

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
尺寸 Size	∅45*251	mm
重量 Weight	790	g

外形图 Outline Drawing: Unit:mm

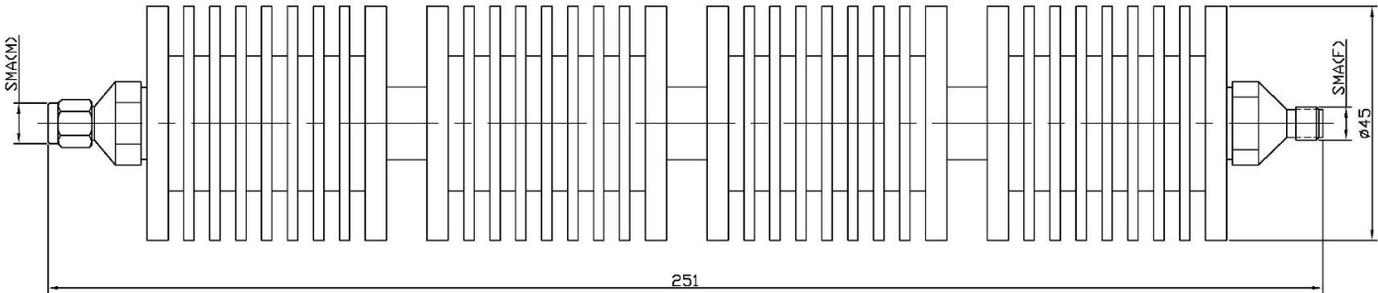

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA03A100-S-12.4	Coaxial Fixed Attenuator, DC-12.4GHz, 3(-1.5/+2.5)dB Attenuation
TA06A100-S-12.4	Coaxial Fixed Attenuator, DC-12.4GHz, 6(-1.5/+2.5)dB Attenuation
TA10A100-S-12.4	Coaxial Fixed Attenuator, DC-12.4GHz, 10(-2.0/+2.5)dB Attenuation
TA20A100-S-12.4	Coaxial Fixed Attenuator, DC-12.4GHz, 20(-1.5/+2.0)dB Attenuation
TA30A100-S-12.4	Coaxial Fixed Attenuator, DC-12.4GHz, 30(-1.2/+2.0)dB Attenuation
TA40A100-S-12.4	Coaxial Fixed Attenuator,