Turpanic Co, Ltd
Email: johnny@turpanic.com
Mob/WeChat/WhatsApp: +8613088887527

SMA Attenuators • Male to Female • DC – 27 GHz - 100 W

电气特性 ELECTRICAL

- **Frequency Range** DC – 27 GHz
- **Attenuation (dB)**
  10 ..... -2.0/+2.8 dB
  20 ..... -1.5/+2.2 dB
  30 ..... -1.2/+1.5 dB
  40 ..... -1.2/+1.5 dB
- **VSWR (MAX)** DC – 27GHz..... 1.3: 1
- **Impedance** 50 Ohms
- **RF Power Rating** 100 Watts Average at 25°C
  PEAK: 500 Watts
  (5 µSec Pulse Width , 10% Duty Cycle)

机械特性 MECHANICAL

- **Connectors** Passivated Stainless Steel or Brass , Gold Plated
- **Connector Pins** Beryllium Copper, Gold Plated

Unit: mm

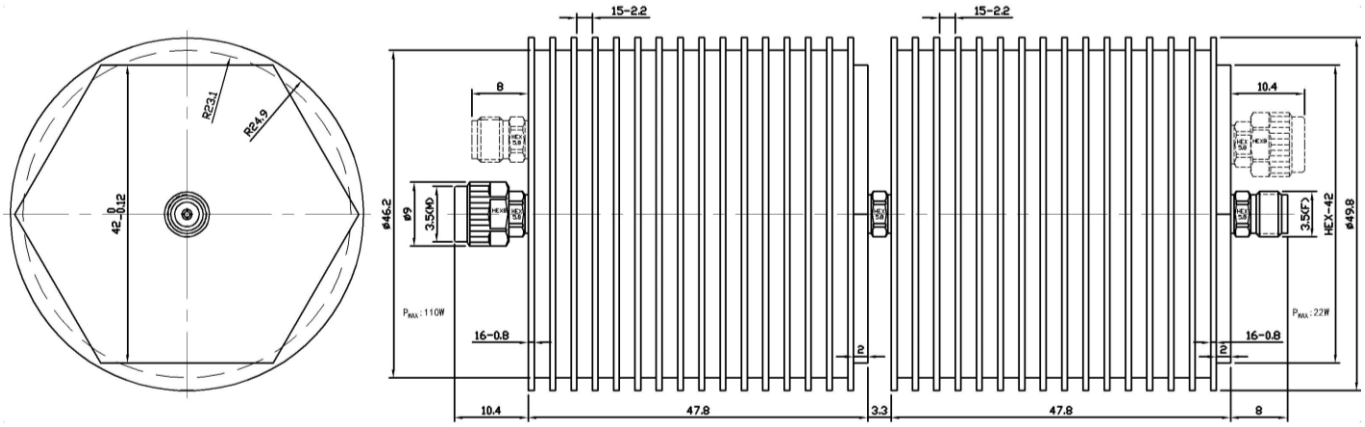

- **Body** Black, Finned Aluminum
- **Insulators** PTFE, Virgin Electrical Grade

订货信息 ORDER

Model Number: TAXXA100-SMA-27

dB Value

© 2014 TURPANIC