

Coaxial Fixed Attenuator 2.92mm Female&Male/DC-40GHz

Model: TAXXA50-2.92-40B

TAXXA50-2.92-40B is a 10/20/30/40 dB coaxial attenuator that is used in millimeterwave systems and operates from DC to 40 GHz.

Features:

- Operating Frequency DC to 40GHz
- Broadband Coverage
- Lost Cost

Applications:

- Test Lab
- Instrumentations
- System Integration

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		40	GHz
衰减范围 Attenuation Range		10(-2.0/+2.5)		dB
		20(-2.0/+3.0)		dB
		30(-2.0/+3.0)		dB
		40(-2.0/+3.0)		dB
驻波 VSWR			1.35	:1
阻抗 Impedance		50		Ohms
射频功率值 RF Power Rating	50 Watts Average at 25°C PEAK: 200 Watts(5 μs pulse width, 10% duty cycle)			


环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
壳体材质 Body Material	Black, finned aluminum	
连接器材质 Connector Material	Passivated stainless steel or brass, gold plated	
内导体 Inner Conductor	Gold plated beryllium copper	
绝缘体 Insulators	PEI	
接口 Connectors	2.92mm Female/Male	

外形图 Outline Drawing:

Unit:mm

10dB:

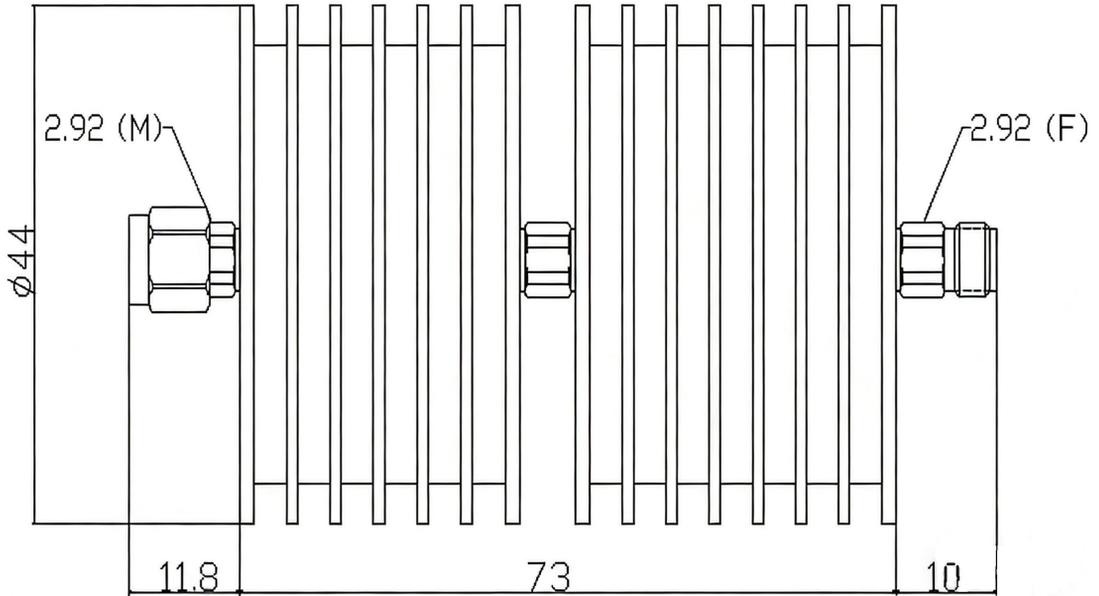

20/30/40dB:



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TA10A50-2.92-40B	Coaxial Fixed Attenuator, DC-40GHz,10(-2.0/+2.5)dB Attenuation
TA20A50-2.92-40B	Coaxial Fixed Attenuator, DC-40GHz,20(-2.0/+3.0)dB Attenuation
TA30A50-2.92-40B	Coaxial Fixed Attenuator, DC-40GHz,30(-2.0/+3.0)dB Attenuation
TA40A50-2.92-40B	Coaxial Fixed Attenuator, DC-40GHz,40(-2.0/+3.0)dB Attenuation