

180 Degree 3dB Bridge

电气特性 Electrical:


工作频率 Frequency Range: 0.5-1GHz
耦合度Coupling : 3dB
插入损耗 Insertion Loss: 0.4db typ, 0.6db max
隔离度Isolation: 25db typ, 22db min
驻波 VSWR: 1.2 typ, 1.3 max
幅度平衡 Amplitude Balance: $\pm 0.6\text{dB}$ max
相位平衡Phase Balance: $\leq \pm 10$ degree
耐功率 Power Handling: 50 Watt
阻抗 Impedance: 50 OHMS

机械特性 Mechanical:

温度范围Temperature Range: $-45^{\circ}\text{C} - +85^{\circ}\text{C}$
接口Connectors: SMA-Female
相对湿度Relative Humidity: 0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm

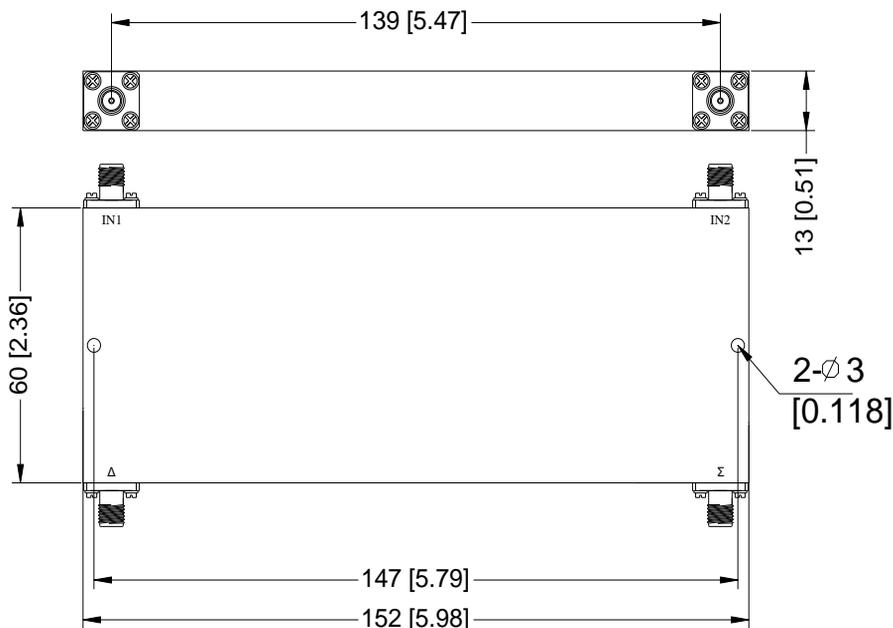



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527