

30dB Directional Coupler SMA- Female 50Ω 400-6000MHz

电气特性 Electrical:

工作频率 Frequency Range:	400-6000MHz
耦合度 Coupling:	30 ± 1.5dB
插入损耗 Insertion Loss:	≤ 1.0dB
驻波 VSWR:	≤ 1.5:1
方向性 Directivity:	≥ 10dB
耐功率 Power Handling:	30Watt
阻抗 Impedance:	50Ω




机械特性 Mechanical:

温度范围 Temperature Range:	-40° C - +80° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

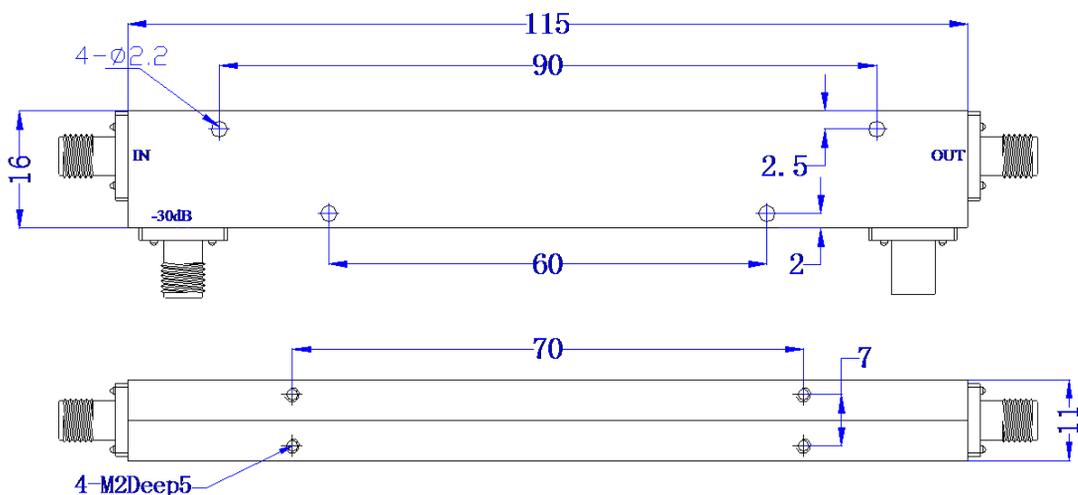



Turpanic Co, Ltd

Email: johnny@turpanic.com

Mob/WeChat/WhatsApp: +8613088887527