

20dB Directional Coupler SMA -Female 50Ω 0.5-26.5 GHz

电气特性 Electrical:


工作频率 Frequency Range:	0.5-26.5 GHz
耦合度 Coupling::	20 ± 1.5 db
插入损耗 Insertion Loss:	1.8db typ, 2.5db max
方向性 Directivity: :	12db typ, 10db min
驻波 VSWR:	1.7 max
耐功率 Power Handling:	30 Watt
阻抗 Impedance:	50 OHMS


机械特性 Mechanical:

温度范围 Temperature Range:	-45° C - +85° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

外形尺寸 Outline Drawing:

Unit: mm

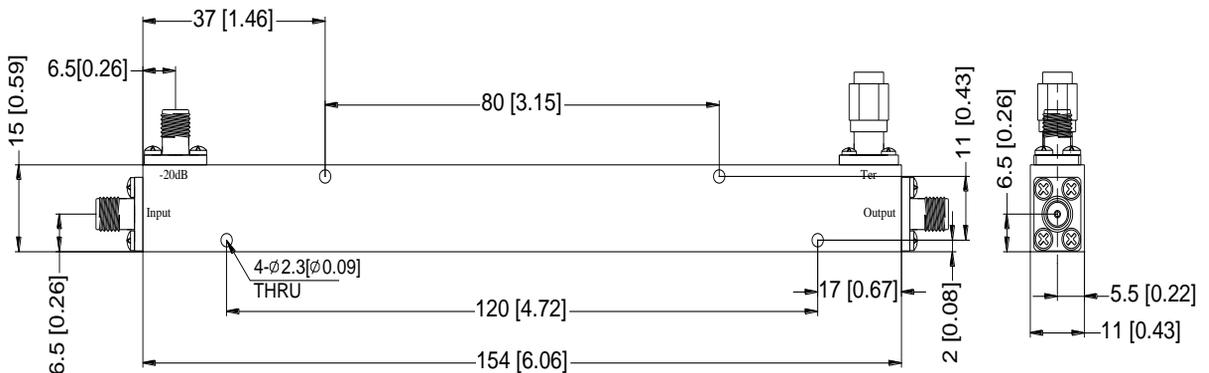

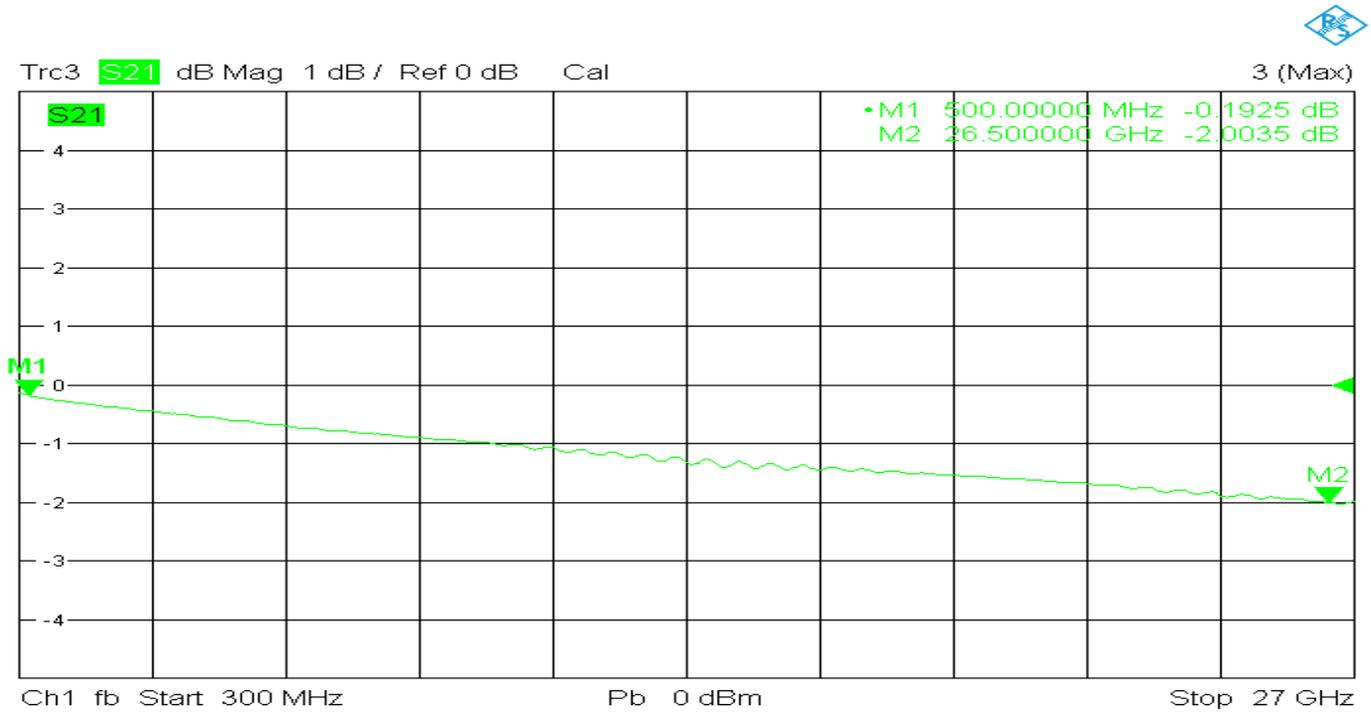

2/26/2020, 5:29 AM