

## 20dB Directional Coupler SMA- Female 50Ω 800-2500MHz

### 电气特性 Electrical:

工作频率 Frequency Range:	800-2500MHz
耦合度 Coupling:	20±1dB
插入损耗 Insertion Loss:	≤0.4dB
驻波 VSWR:	≤1.25:1
方向性 Directivity:	≥20dB
耐功率 Power Handling:	50Watt
阻抗 Impedance:	50Ω




### 机械特性 Mechanical:

温度范围 Temperature Range:	-40° C - +80° C
接口 Connectors:	SMA-Female
相对湿度 Relative Humidity:	0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

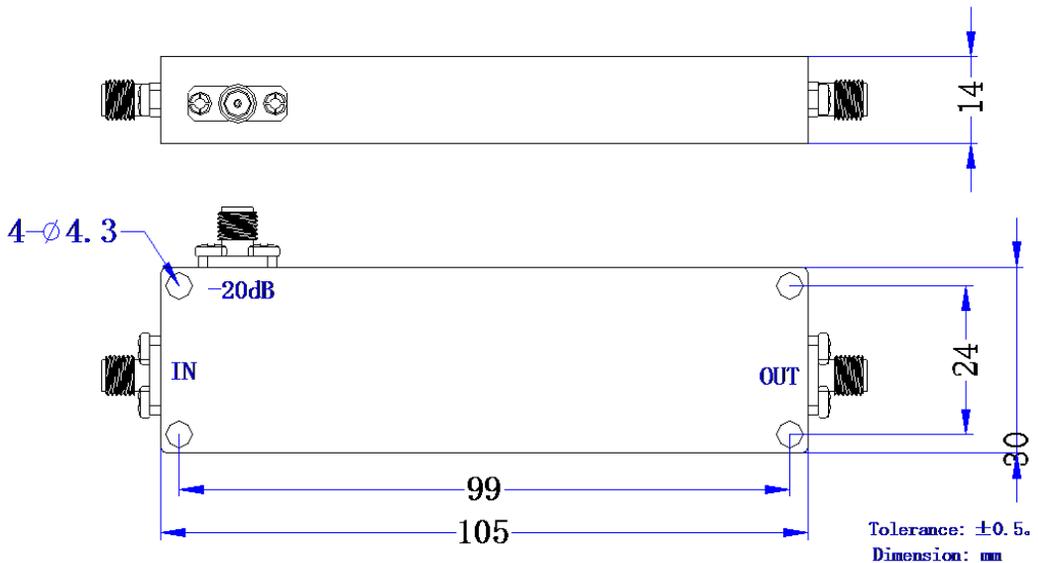



Turpanic Co, Ltd

Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)

Mob/WeChat/WhatsApp: +8613088887527