

Phase Trimmer

DC-40GHz/2.92mm Male to Female

Model: TLADPS-2.92

TLADPS-2.92 is a phase trimmers are adjustable passive microwave devices designed for RF applications. TLADPS-2.92 have a phase range of 0° to 600° and a phase adjustment of 15° per GHz. Maximum insertion loss for all of our phase trimmers for RF is 0.65 dB.

Features:

- Operating Frequency DC to 40 GHz
- High phase adjustmant accuracy
- Low insertion loss

Applications:

- laboratory test
- Communication equipment


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		40	GHz
驻波 VSWR			1.3	:1
插损 Insertion Loss			0.65	dB
相位调节范围 Phase adjustment range		15 X f(GHz)		°
介电强度 Dielectric Withstanding Voltage		750		V
绝缘电阻 Insulation Resistance		5000		MOhms
阻抗 Impedance		50		Ohms

环境和机械特性 Envirionmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-55 To +125	°C
电介质 Dielectric	PEI 1000	
壳体材质 Body Material	Stainless steel, Passivated	
内导体		

外形图 Outline Drawing: Unit:mm

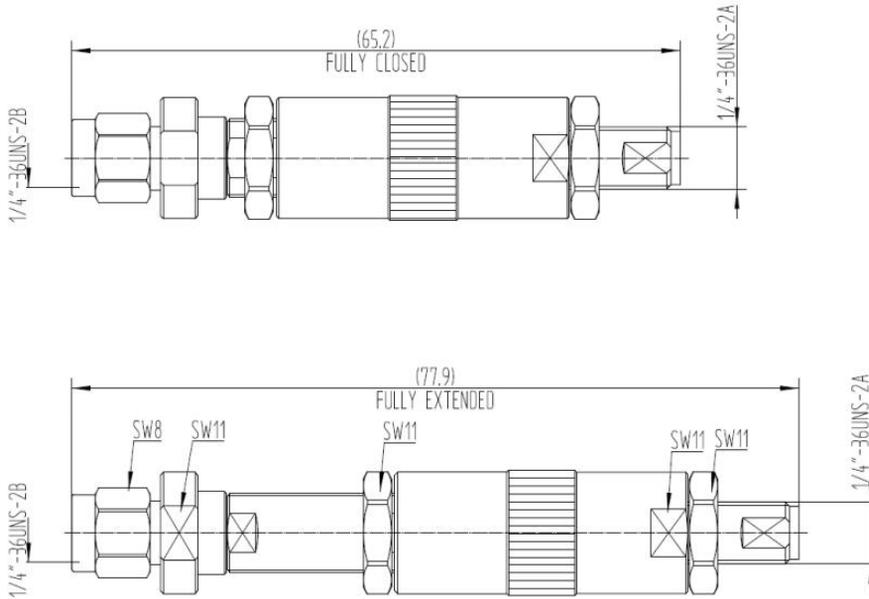


订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLADPS-2.92	SMA straight Male Plug to Female Jack Phase Trimmer, DC-40GHz, Phase adjustment: 15° per GHz.	Rev.1.1


典型曲线 Typical Performance Data:

VSWR&Insertion Loss&Phase vs Frequency

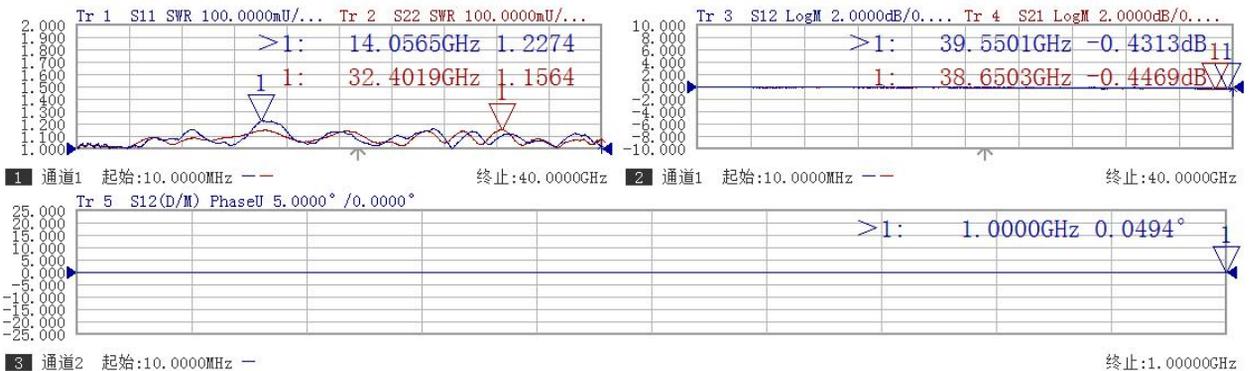

典型曲线 Typical Performance Data:

VSWR&Insertion Loss&Phase vs Frequency

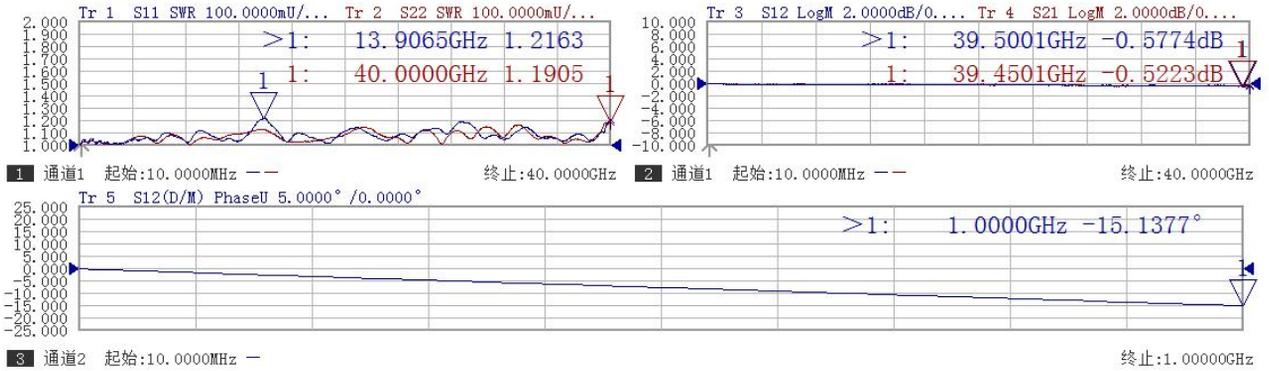

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.