

IQ Mixer

RF:0.4-0.8GHz/LO:0.4-0.8 GHz/IF:DC-0.5 GHz

Model: TLIQ-0.4G0.8G-0.5-S

TLIQ-0.4G0.8G-0.5-S is an ultra-broadband mixer spanning 0.4 to 0.8 GHz on the RF and LO ports with an IF from DC to 0.5 GHz. Up to 25 dBc of image rejection is available due to the excellent phase and amplitude balance of its on-chip LO quadrature hybrid.

Features:

- RF/LO coverage : 0.4-0.8GHz
- IF operation : DC-0.5 GHz
- Conversion loss: 12dB Typ
- LO power : 16dBm Typ
- Image Rejection : 25dBc Typ

Applications:

- Single Sideband and Image Rejection Mixing
- IQ Modulation / Demodulation
- Vector Amplitude Modulation
- Band Shifting

电气特性 Electrical Characteristics:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|--|-----|-----|-----|----------|
| RF频率 RF Frequency | 0.4 | | 0.8 | GHz |
| LO频率 LO Frequency | 0.4 | | 0.8 | GHz |
| LO 驱动功率 LO-Input power | 12 | 16 | 20 | dBm |
| IF频率 IF Frequency | DC | | 0.5 | GHz |
| 镜像抑制 Image Rejection @RF/LO:0.4-0.8GHz,I+Q:0.1GHz | | 25 | | dBc |
| 变频损耗 Conversion Loss @RF/LO:0.4-0.8GHz,I/Q:0.1GHz | | 12 | | dB |
| 输入P1dB压缩点 Input 1 dB Gain Compression Point | | 15 | | dBm |
| LO to IF 隔离 LO to IF Isolation | | 15 | | dB |
| LO to RF 隔离 LO to RF Isolation | | 35 | | dB |
| RF to IF 隔离 RF to IF Isolation | | 15 | | dB |

机械特性 Mechanical Specifications:


| 参数 Parameter | 指标 Value | 单位 Units |
|-------------------|--------------------------------|----------|
| RF接口 RF Connector | SMA Female | |
| LO接口 LO Connector | SMA Female | |
| IF接口 IF Connector | SMA Female | |
| 尺寸 Size | 17.5*17.5*8(Without Connector) | mm |

绝对最大值 Absolute Maximum Ratings:

| 参数 Parameter | 指标 Value |
|----------------------------------|----------------------|
| 本振端口输入功率 LO Input Power | +20 dBm |
| 中频输入电流 IF Input Current | ±2mA |
| 射频/中频端口输入功率 RF/IF Input Power | +24dBm |
| ESD灵敏度 ESD sensitivity (HBm) | Class 0, passed 150V |

外形图 Outline Drawing:

Unit:mm

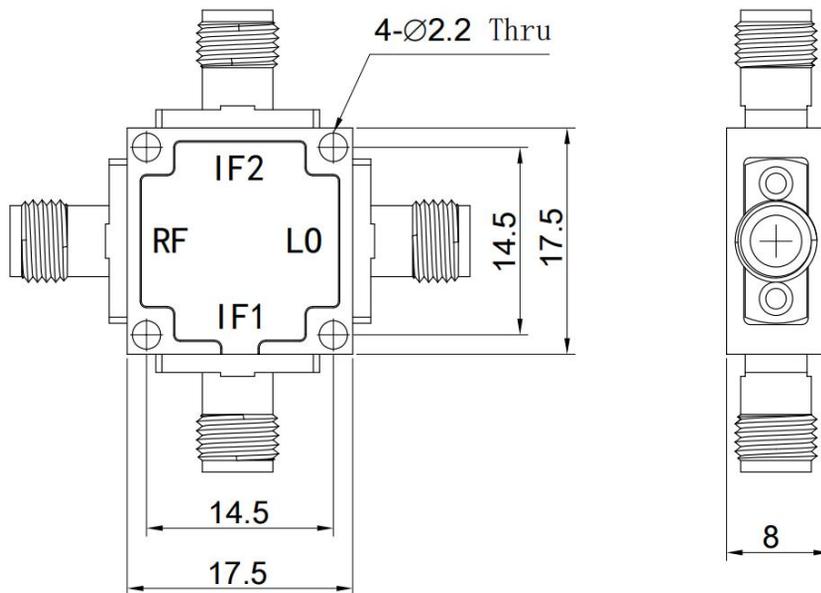

Regulatory Compliance:



温度环境 Environmental Conditions:

| 参数 Parameter | Min | Typ | Max | 单位 Units |
|------------------------------------|---|-----|------|----------|
| 操作温度 Operating Temperature | -45 | | +85 | °C |
| 存储温度 Non-operating Temperature | -55 | | +100 | °C |
| 相对湿度 Relative humidity | | 95 | | % |
| 海拔 Altitude | 10,000 | | | feet |
| 震动 Shock / Vibration(MIL-STD-810F) | 25g rms (15 degree 2KHz) endurance, 1 hour per axis | | | |
| 冲击 Shock(non operating) | 20G for 11msc half sin wave,3 axis both directions | | | |

订货信息 Ordering Information:

| 标准型号 Base Number | 描述 Description | 版本号 Revision |
|---------------------|--|--------------|
| TLIQ-0.4G0.8G-0.5-S | Image Rejection or I/Q Mixer RF:0.4-0.8GHz,LO:0.4-0.8GHz,IF:DC-0.5GHz | Rev.1.0 |