

Low Noise Amplifier

2.2-2.3GHz /0.7dB NF/48dB Gain/12dBm P1dB

Model: TLLA2.2G2.3G-48-07

TLLA2.2G2.3G-48-07 is a low noise amplifier with a typical small signal gain of 48 dB and a nominal noise figure of 0.7 dB across the frequency range of 2.2 to 2.3 GHz. The DC power requirement for the amplifier is +12 V DC/50 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range: 2.2-2.3 GHz
- Gain: 48dB Typ
- Noise Figure: 0.7dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	2.2		2.3	GHz
小信号增益 Small Signal Gain		48		dB
增益平坦度 Gain Flatness		±0.5		dB
噪声系数 Noise Figure		0.7		dB
线性输出功率 Output P1dB		12		dBm
输入驻波 Input VSWR		1.4		:1
输出驻波 Output VSWR		1.4		:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current		50		mA
阻抗 Impedance		50		Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

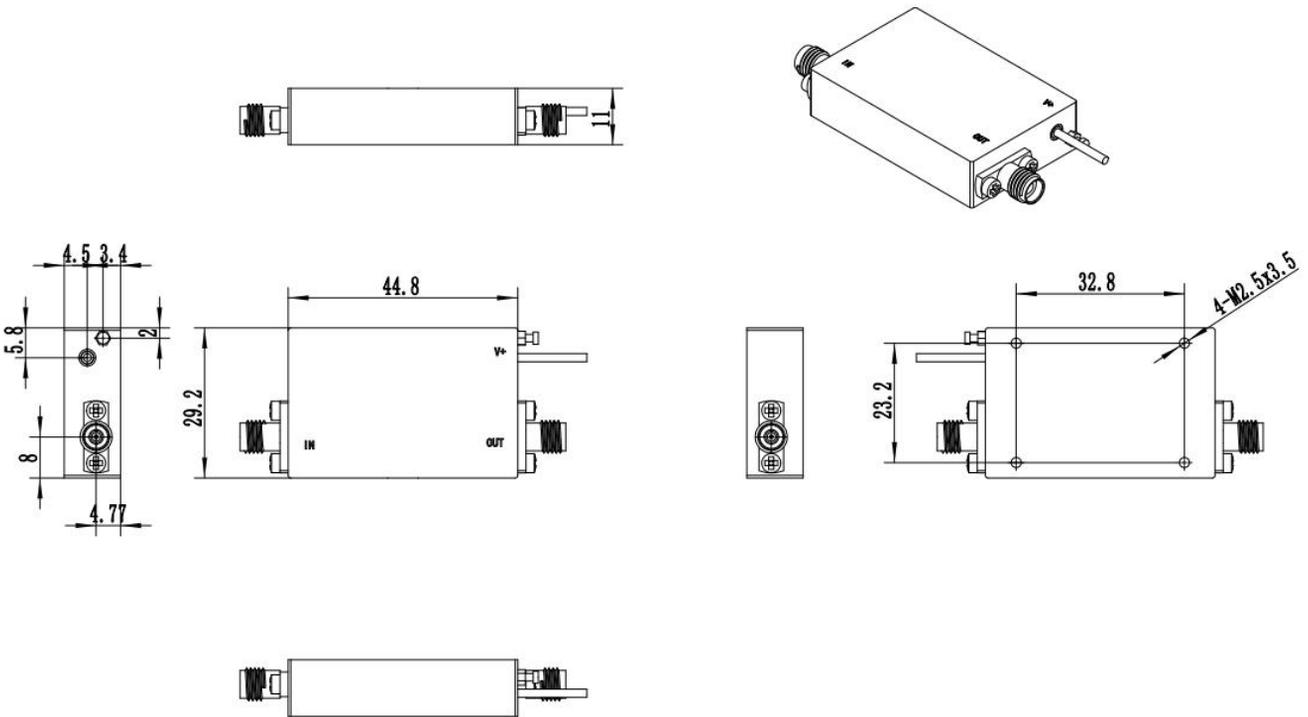

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA2.2G2.3G-48-07	Low Noise Amplifier, 2.2-2.3GHz, Noise Figure:0.7dB, Gain:48 dB,P1dB:12dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA2.2G2.3G-48-07-HS	Low Noise Amplifier, 2.2-2.3GHz, Noise Figure:0.7dB, Gain:48 dB,P1dB:12dBm,+12V DC,With Heatsink	Rev.1.1