

## Power Amplifier

0.1-22GHz /35dB Gain/32 dBm Psat

Model: TLPA0.1G22G-35-33

TLPA0.1G22G-35-33 is a power amplifier with a typical small signal gain of 35 dB and Psat of 32 dBm across the frequency range of 0.1 to 22 GHz. The DC power requirement for the amplifier is +24 VDC/0.85 A. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Ultra Wide Band: 0.1-22GHz
- Small Signal Gain: 35dB Typ
- Output Power Psat: 32dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.1-22			GHz
小信号增益 Small Signal Gain	33	35		dB
增益平坦度 Gain Flatness		±2.5		dB
线性输出功率 Output P1dB		30		dBm
饱和输出功率 Output Psat		32		dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		24	25	V DC
直流电流 DC Supply Current		850		mA
阻抗 Impedance	50			Ohms

## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
尺寸 Size	60*65*11(Without Heatsink) 60*90*41(With Heatsink)	mm
重量 Weight	/	g

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+25V
输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm



## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA0.1G22G-35-33	Power amplifier 0.1-22GHz,Power Gain:35dB,Psat:32dBm, +24V DC,Without Heatsink	Rev.1.1
TLPA0.1G22G-35-33-HS	Power amplifier 0.1-22GHz,Power Gain:35dB,Psat:32dBm, +24V DC,With Heatsink	Rev.1.1


## 典型曲线 Typical Performance Data:

### Input VSWR vs Frequency


Input VSWR

### 典型曲线 Typical Performance Data:


#### Small Signal Gain vs Frequency

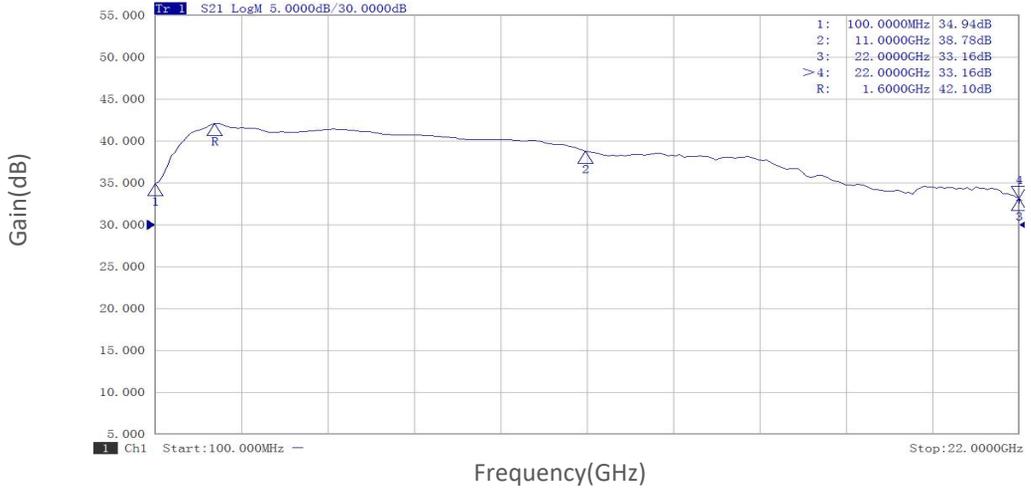

#### PndB vs Frequency

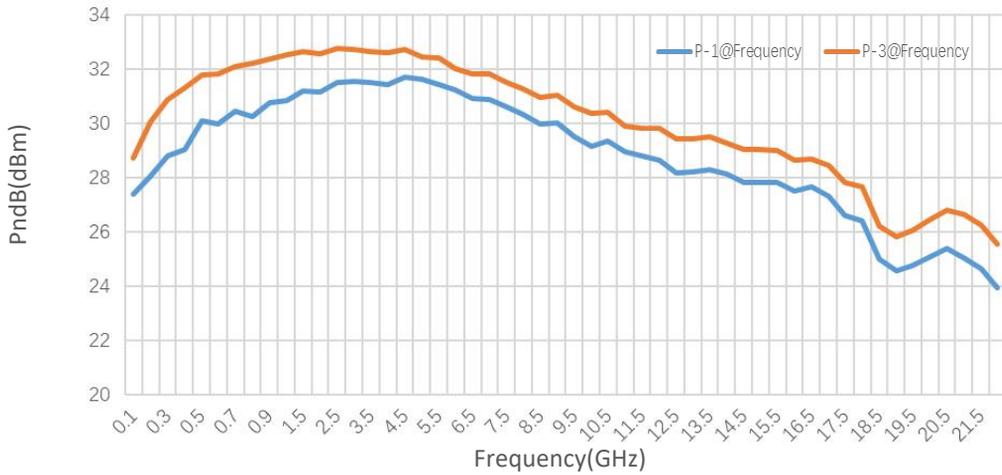


#### Pout@Pin

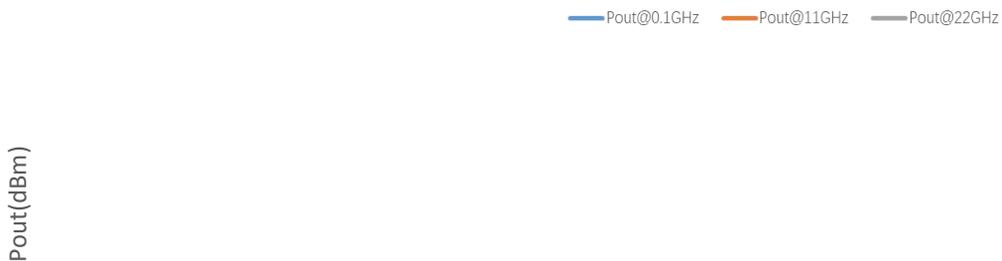


典型曲线 Typical Performance Data:

Pout@Equal\_Pin

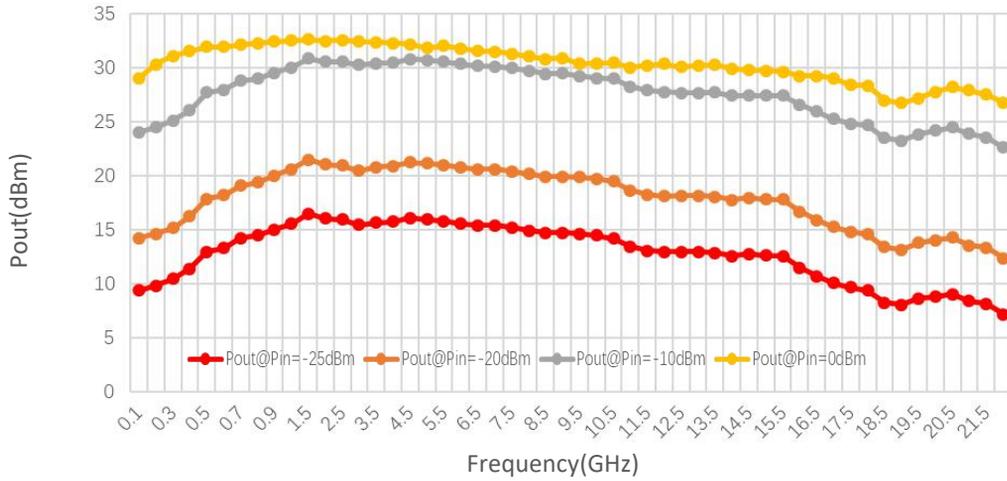

Spurious vs Frequency

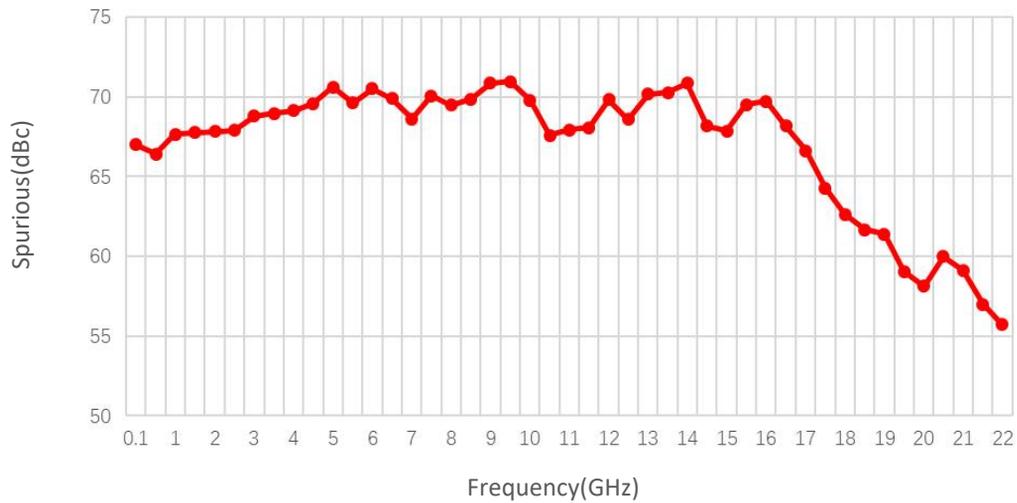

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.