

0.1-4GHz, Gain:45dB, Psat:41dBm

Feature:

- Ultra Wide Band: 0.1-4GHz
- Gain:45 dB Typ
- Psat Output Power: 41 dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	0.1-4			GHz
增益 Gain		45		dB
增益平坦度 Gain Flatness		±3		dB
线性输出功率 Output P1dB	0.1-1G	38		dBm
	1-4G	40		
饱和输出功率 Output Psat		41		dBm
输入驻波 Input VSWR			1.8	:1
直流电压 DC Voltage	+28			V DC
直流电流 DC Supply Current		2.5		A
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	140*80*12	mm
重量 Weight	260	g

绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28V

Unit: mm

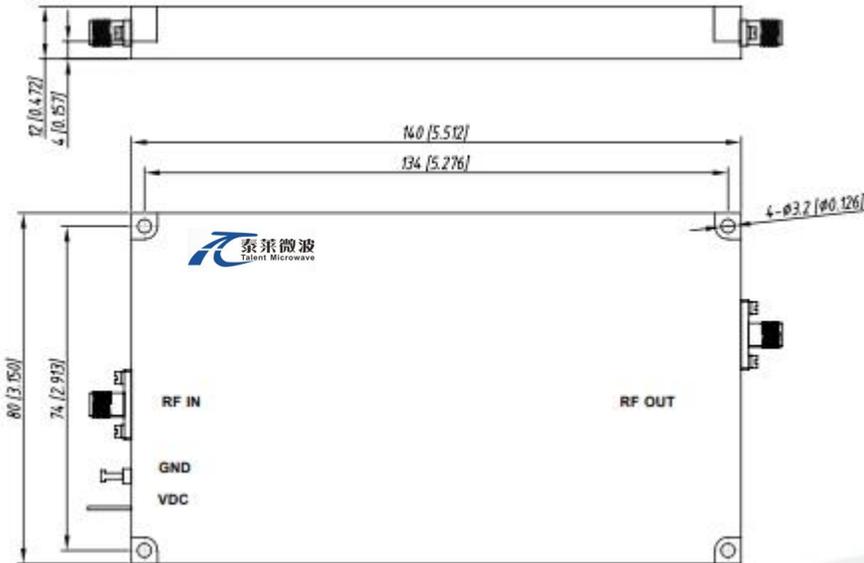

***Heat Sink Required During Operation



OBSERVE PRECAUTIONS
 ELECTROSTATIC SENSITIVE
 DEVICES

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*				°C
存储温度 Non-operating Temperature*				°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:


标准型号 Part Number	描述 Description	版本号Revision
------------------	----------------	-------------

Power amplifier 0.1-4GHz,Gain:45dB,Psat:41dBm,


Input VSWR vs Frequency

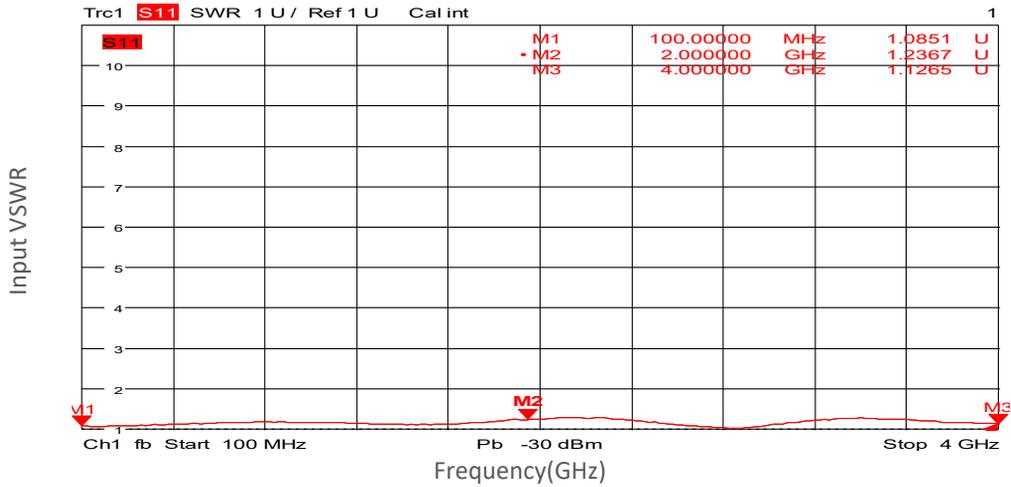


Small Signal Gain vs Frequency

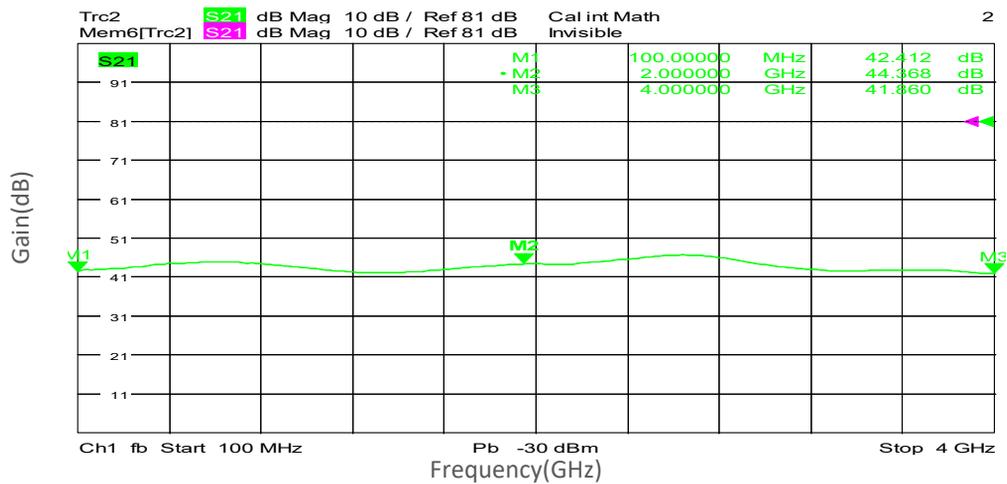


Gain vs Output Power

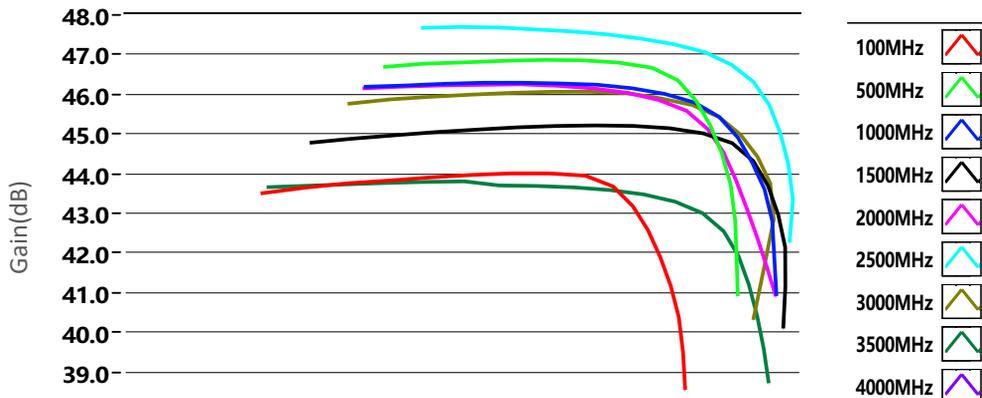


Input VSWR vs Frequency

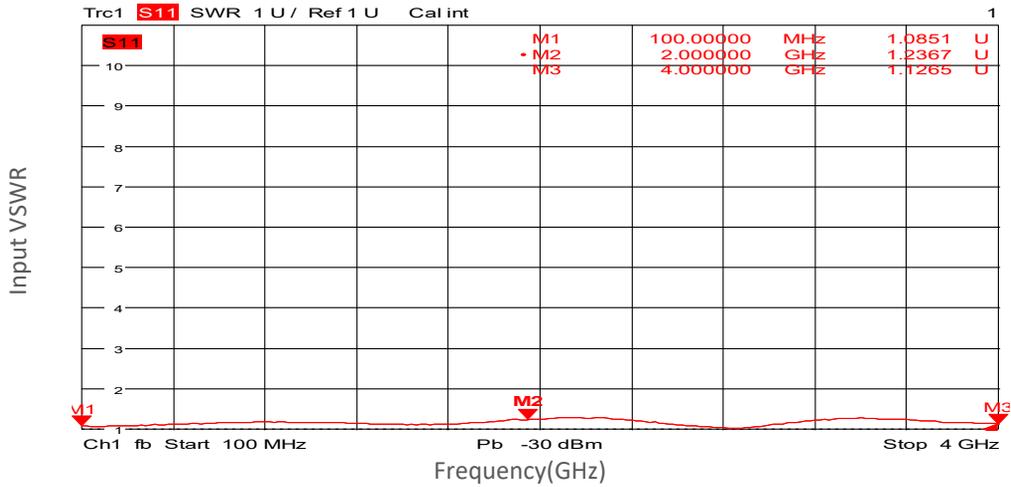


Small Signal Gain vs Frequency

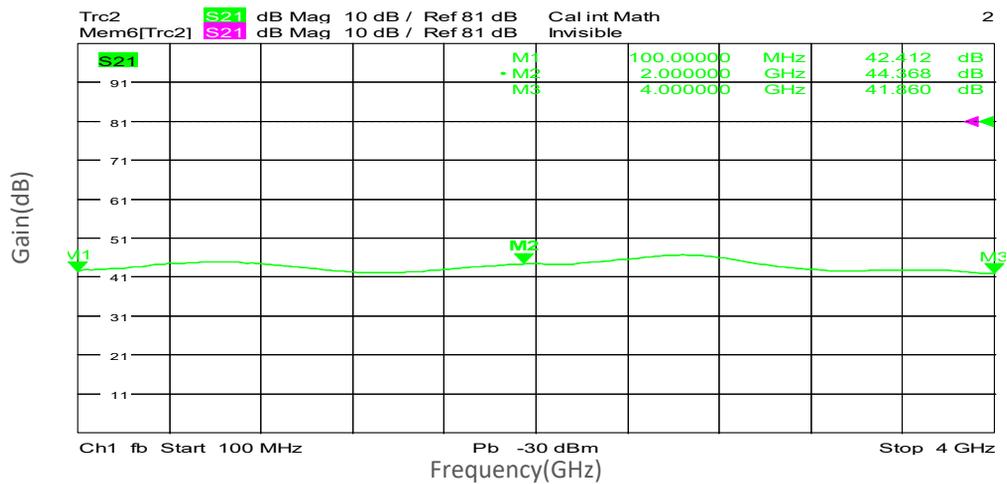

Gain vs Output Power

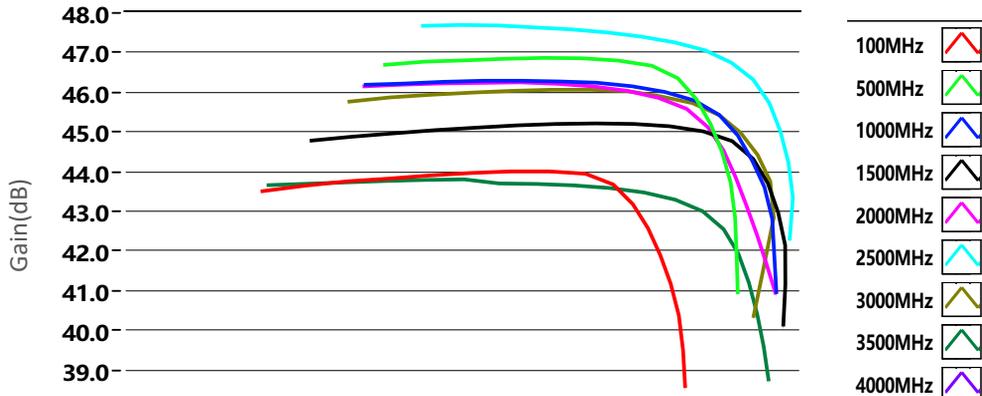

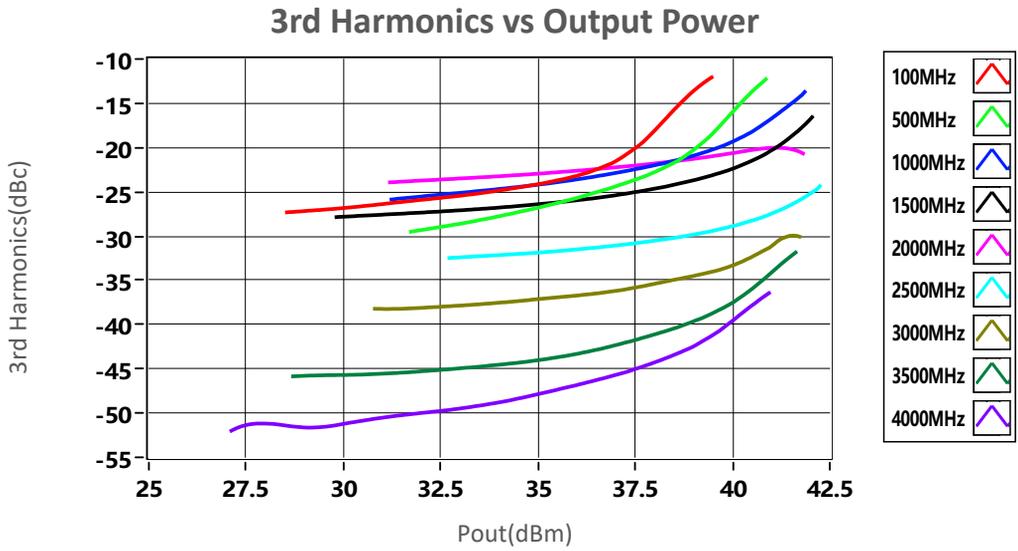

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.