

0.4-150MHz, Gain:30dB, Psat:30dBm

Feature:

- Ultra Wide Band: 0.4-150MHz
- Gain: 30 dB Typ
- P1dB Output Power: 30 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.4-150			MHz
增益 Gain	27	30		dB
增益平坦度 Gain Flatness		±0.5	±1	dB
线性输出功率 Output P1dB	30	31		dBm
三阶互调 Output IP3		38		dBm
输入驻波 Input VSWR			2.0	:1
输出驻波 Output VSWR			2.0	:1
直流电压 DC Voltage		24	28	V DC
直流电流 DC Supply Current		0.5	0.6	A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	76*64*40	mm
重量 Weight	200	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28 V
输入功率 RF Input Power	+10 dBm



Unit: mm

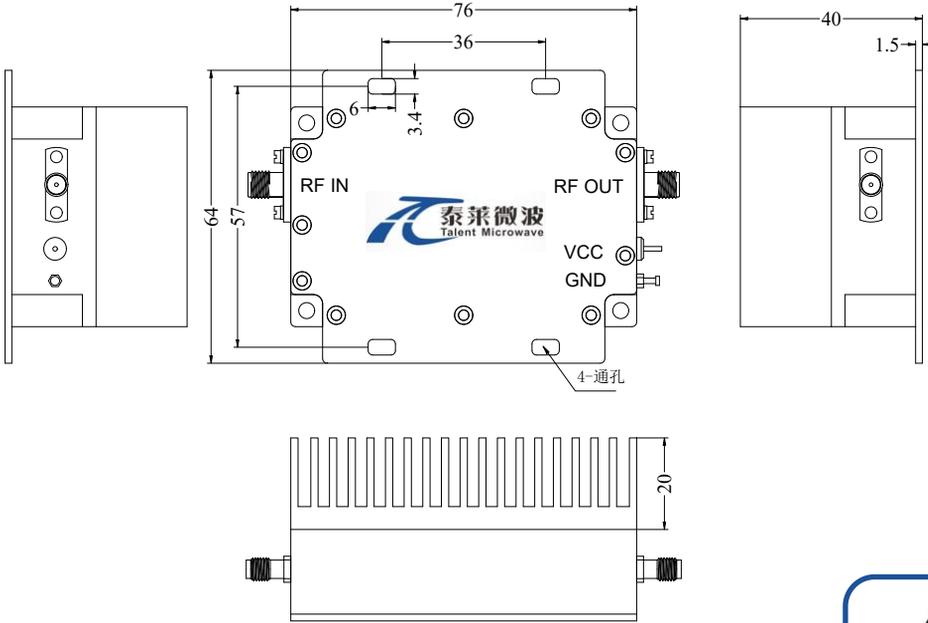

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	°C
存储温度 Non-operating Temperature*	-50		+70	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.


订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号 Revision
TLPA0.4M150M-30-30-HS	Power amplifier 0.4-150MHz, Gain:30dB, P1dB:30dBm, +24V DC, With Heatsink	Rev.1.1


Input VSWR vs Frequency

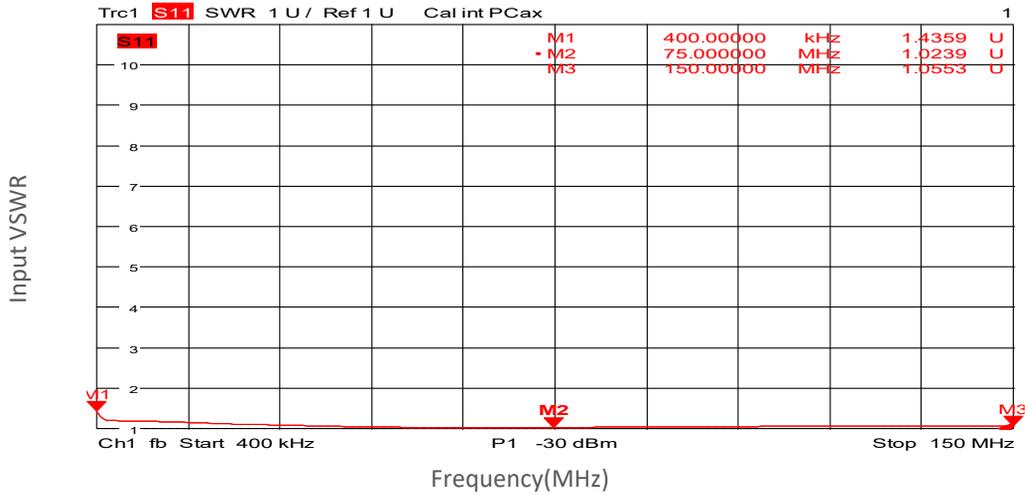


Output VSWR vs Frequency

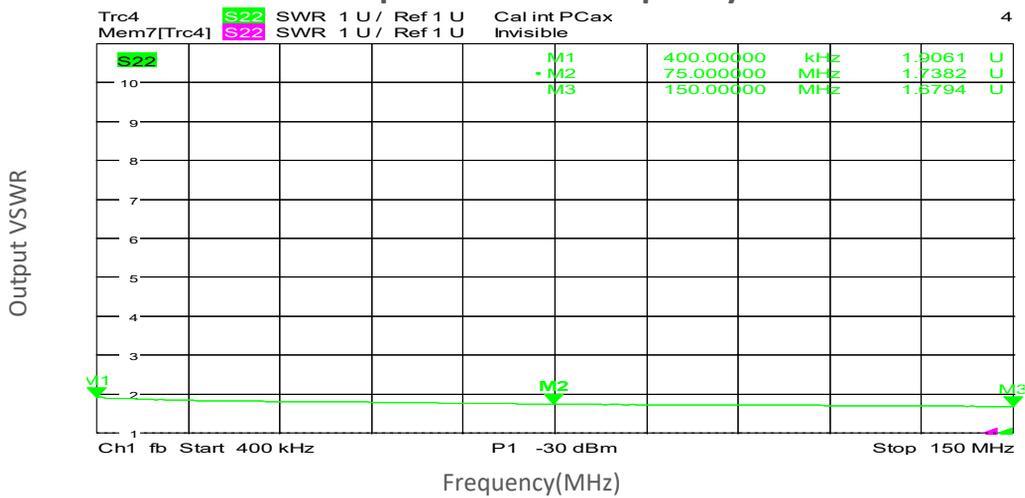


Small Signal Gain vs Frequency

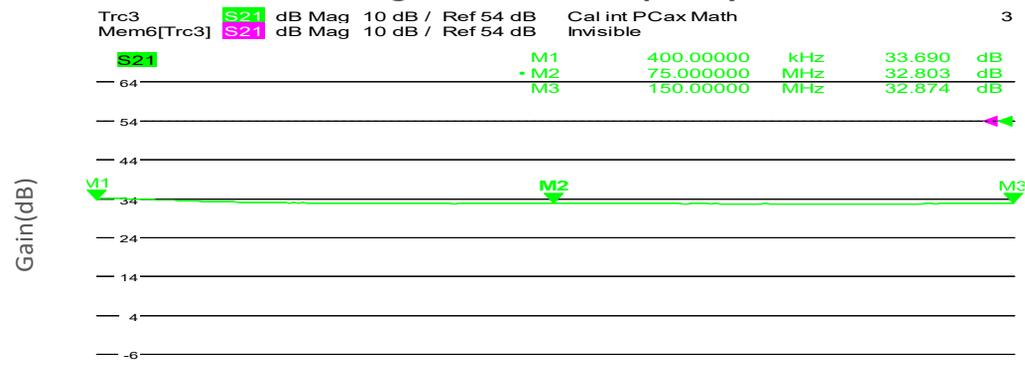

Gain vs Output Power

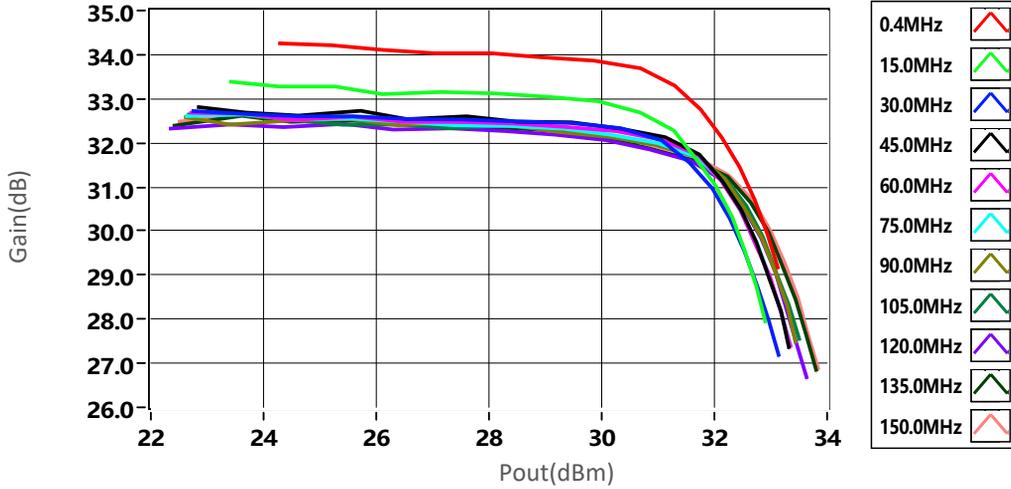


P1dB&P3dB&P5dB vs Frequency

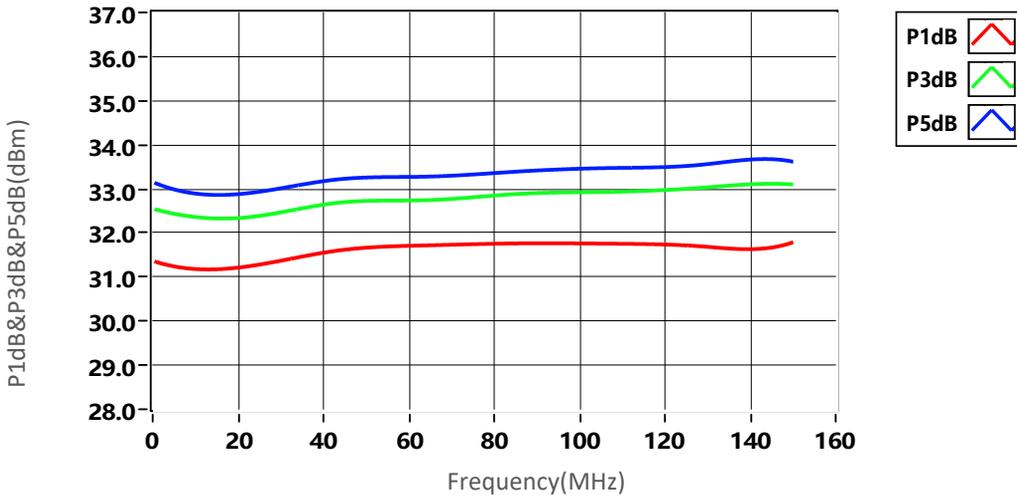


Psat vs Frequency



2nd Harmonics vs Output Power

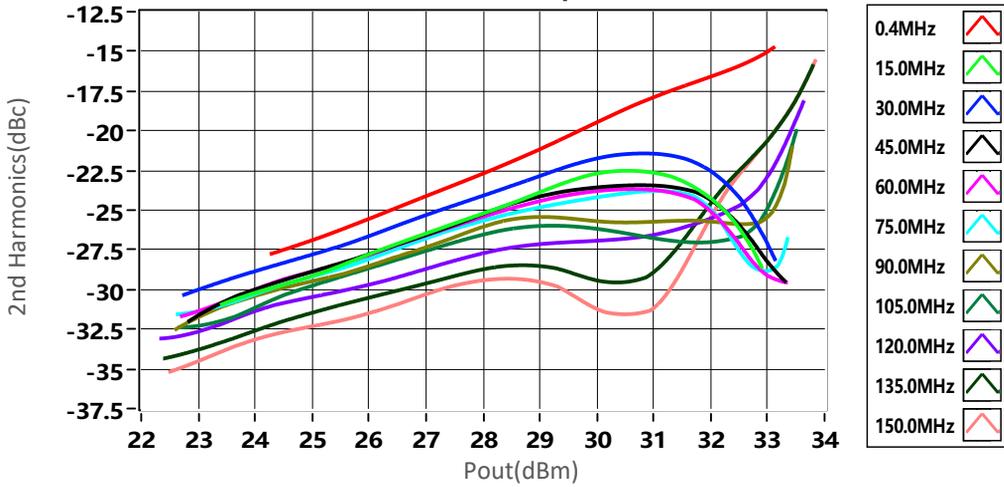

3rd Harmonics vs Output Power

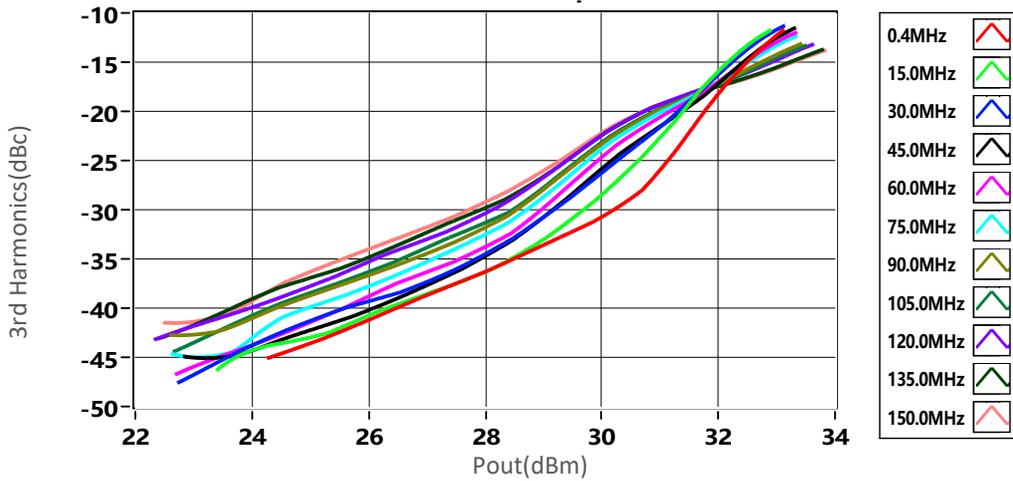

4th Harmonics vs Output Power

