

## 0.7-6GHz, Gain:30dB, Psat:35dBm

### Feature:

- Ultra Wide Band: 0.7-6GHz
- Gain:30dB Min
- Psat Output Power:35dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### 电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	0.7-6			GHz
增益 Gain	30	33		dB
增益平坦度 Gain Flatness		±2	±2.5	dB
线性输出功率 Output P1dB	33	34		dBm
饱和输出功率 Output Psat		35		dBm
杂散 Spurious		-60		dBc
输入驻波 Input VSWR		1.6	2	:1
直流电压 DC Voltage		+28		V DC
直流电流 DC Supply Current		1		A
阻抗 Impedance	50			Ohms

### 机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	67*80*12	mm
重量 Weight	/	g


### 绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+28V
输入功率 RF Input Power	10dBm



Available 220V System

Unit: mm

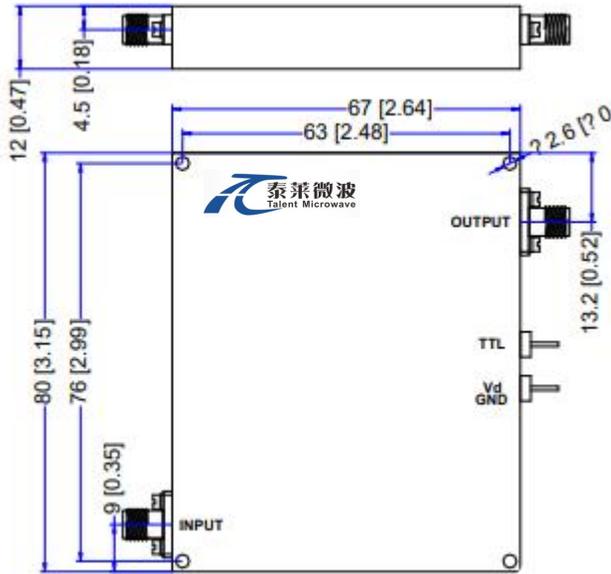

**\*\*\*Heat Sink Required During Operation**



**温度环境 Environmental Conditions:**

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-40		+75	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

**订货信息 Ordering Information:**

标准型号 Part Number	描述 Description	版本号Revision
TLPA0.7G6G-30-35	Power amplifier 0.7-6GHz,Gain:30dB,Psat:35dBm,+28V DC,Without Heatsink.	Rev.1.0