

1.6GHz-1.7GHz, Gain:38dB, Psat:38dBm

Feature:

- Frequency range: 1.6GHz-1.7GHz
- Gain: 38dB Min
- Psat Output Power: 38 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	1.6-1.7			GHz
增益 Gain	38	40		dB
增益平坦度 Gain Flatness		±1		dB
线性输出功率 Output P1dB		35		dBm
饱和输出功率 Output Psat	38	39		dBm
效率PAE@Psat	40			%
输入驻波 Input VSWR		1.5	2.0	:1
直流电压 DC Voltage		28		V DC
直流电流 DC Supply Current		1.5		A
阻抗 Impedance		50		Ohms

机械特性 Mechanical Specifications:


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female	
直流偏置 Bias	Solder Pin	
尺寸 Size	90*48*15	mm
重量 Weight	150	g



绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	30V

Unit: mm

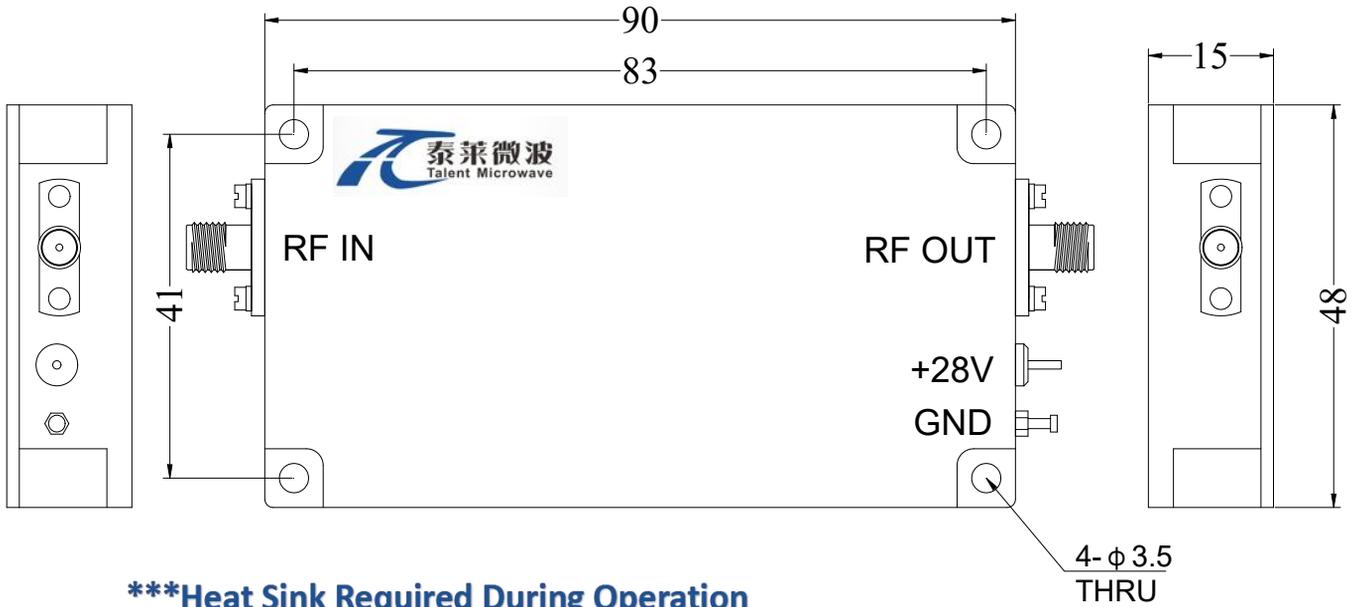

*****Heat Sink Required During Operation**



温度环境 Environmental Conditions:

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	30,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
------------------	----------------	-------------