

## Power Amplifier

6-8GHz/38dB Gain/44 dBm Psat

Model: TLPA6G8G-38-44

TLPA6G8G-38-44 is a power amplifier with a typical small signal gain of 38 dB and a minimum Psat of 44 dBm across the frequency range of 6 to 8 GHz. The DC power requirement for the amplifier is +28 VDC/2 A. The input and output port configuration offers coax adapter structure with SMA female.

### Features:

- Frequency range: 6-8GHz
- Gain: 38dB Typ
- Output Power Psat: 44dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		6-8		GHz
小信号增益 Small Signal Gain	36	38		dB
增益平坦度 Gain Flatness		±1.5		dB
增益变化度 Gain Variation@TEM			±2	dB
线性输出功率 Output P1dB		41		dBm
饱和输出功率 Output Psat	44			dBm
杂散 Spurious		-60		dBc
谐波 Harmonic		-15		dBc
输入驻波 Input VSWR		1.5	2	:1
直流电压 DC Voltage		28		V DC
直流电流 DC Supply Current@Pout=10W		2	4	A
阻抗 Impedance		50		Ohms

### 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	115*100*20(Without Heatsink) 175*114*70(With Heatsink)	mm
重量 Weight	1500	g

### 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

### 外形图 Outline Drawing:

Unit:mm

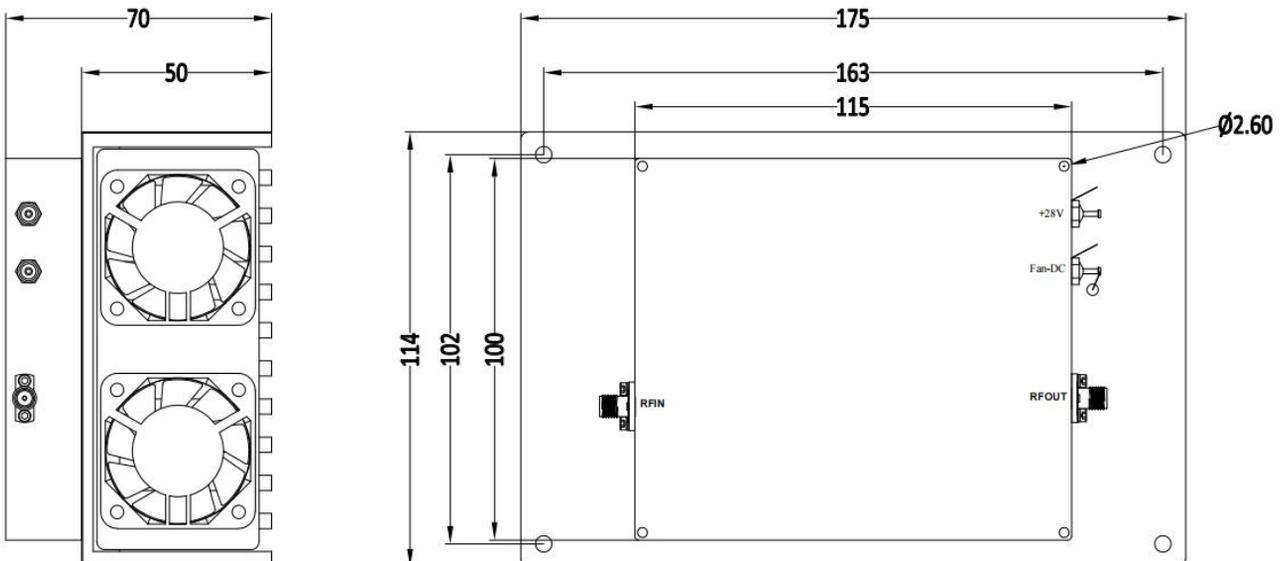

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+50	°C
存储温度 Non-operating Temperature*	-50		+60	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLPA6G8G-38-44	Power amplifier 6-8GHz,Gain:38dB,Psat:44dBm, +28V DC,Without Heatsink	Rev.1.1
TLPA6G8G-38-44-HS	Power amplifier 6-8GHz,Gain:38dB,Psat:44dBm, +28V DC,With Heatsink	Rev.1.1

## 典型曲线 Typical Performance Data:

### P1dB vs Frequency

P1dB(dBm)

## 典型曲线 Typical Performance Data:

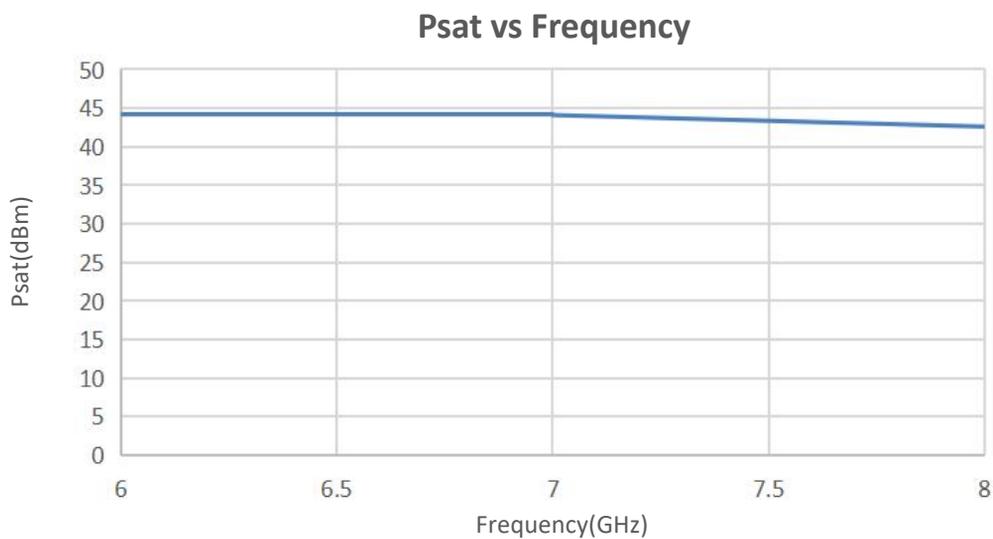

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.