

## 360° Phase Shift 2-4GHz

### 电气特性 Electrical:


工作频率 Frequency Range: 2-4 GHz  
 插入损耗 Insertion Loss:  $\leq 5.5\text{dB}$   
 驻波 VSWR:  $\leq 2.5: 1$   
 移项 Phase Range:  $360^\circ$   
 相位 Phase Flatness :  $\pm 15^\circ$   
 控制电压 Control Voltage: 0-12V  
 衰减平衡 Amplitude Balance :  $\leq \pm 2\text{ dB}$   
 current: 5 mA  
 功率 Power Handling Input Power for 0.1 dB  
 Compression: 25dBm

### 机械特性 Mechanical :

温度范围 Temperature Range:  $-55^\circ\text{ C} - +85^\circ\text{ C}$   
 阻抗 Impedance: 50 OHMS  
 接口 Connectors: SMA-Female  
 相对湿度 Relative Humidity: 0 ~ 90%

### 外形尺寸 Outline Drawing:

Unit: mm

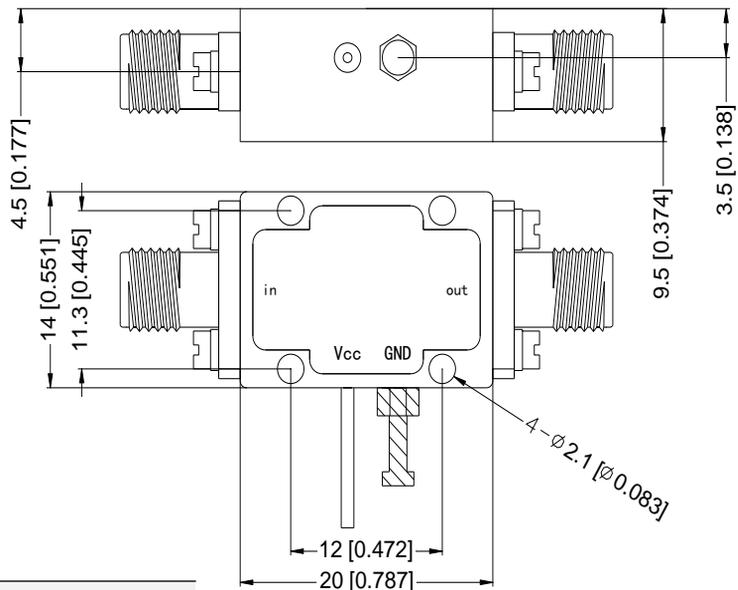

### Absolute Maximum Ratings

Control Voltage	0~ 13V
RF Input power	+27dBm



Turpanic Co, Ltd

Email: [johnny@turpanic.com](mailto:johnny@turpanic.com)

Mob/WeChat/WhatsApp: +8613088887527