

## 76-81GHz, NF:4.0 dB, Gain:40 dB

### Feature:

- Ultra Wide Band: 76-81 GHz
- Gain:40dB Typ
- Noise Figure:4.0dB Typ
- Unconditional stability

### 电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	76		81	GHz
增益 Gain	38	40		dB
噪声系数 Noise Figure		4.0		dB
输出功率1dB压缩点 Output P1dB	10	12		dBm
直流电压 DC Voltage		+5		V DC
直流供电 DC power supply		180		mA

### 机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入接口 Input Connector	WR-12/ UG-387/U	
输出接口 Output Connector	WR-12/ UG-387/U	
供电引脚 Power Supply Pin	Solder Pin	
尺寸 Size	45*42*24	mm


### 绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+5 V
输入功率 RF Input Power	TBD
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



Available 220V System  
Benchtop Amplifier

Unit: Inches(mm)

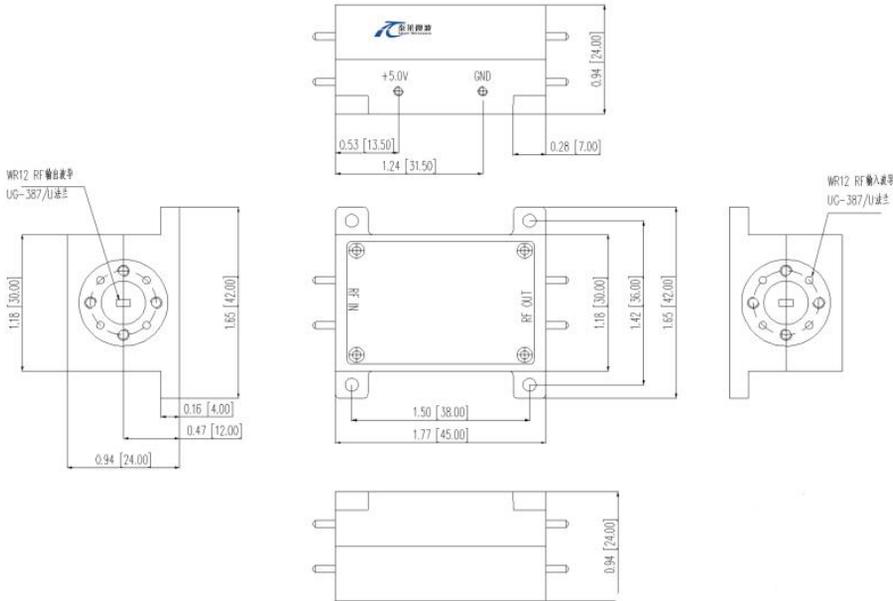

## 温度环境 Environmental Conditions:

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-25		+65	°C
存储温度 Non-operating Temperature	-45		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
TMLA-076081-4040-12	Low Noise Amplifier,76-81GHz, Noise Figure:4.0dB, Gain:40dB,+5V DC,WR-12	Rev.1.1