

## 40-60GHz, Gain:14 dB, Psat:30 dBm

### Feature:

- Frequency Range: 40-60 GHz
- Gain:14 dB Min
- Output Power Psat:30 dBm Min
- Good Power and Gain Flatness

### 电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	40-60			GHz
增益 Gain	14			dB
饱和输出功率 Output Psat	30			dBm
输入驻波 Input VSWR		2		:1
输出驻波 Output VSWR		2		:1
直流电压 DC Voltage		20		V DC
直流电流 DC Supply Current		1500		mA

### 机械特性 Mechanical Specifications:

参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	WR-19/UG-387/U	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	45*35*31	mm
重量 Weight	100	g


### 绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+20V
输入功率 RF Input Power	TBD



Available 220V System  
 Benchtop Amplifier

Unit: mm(Inches)

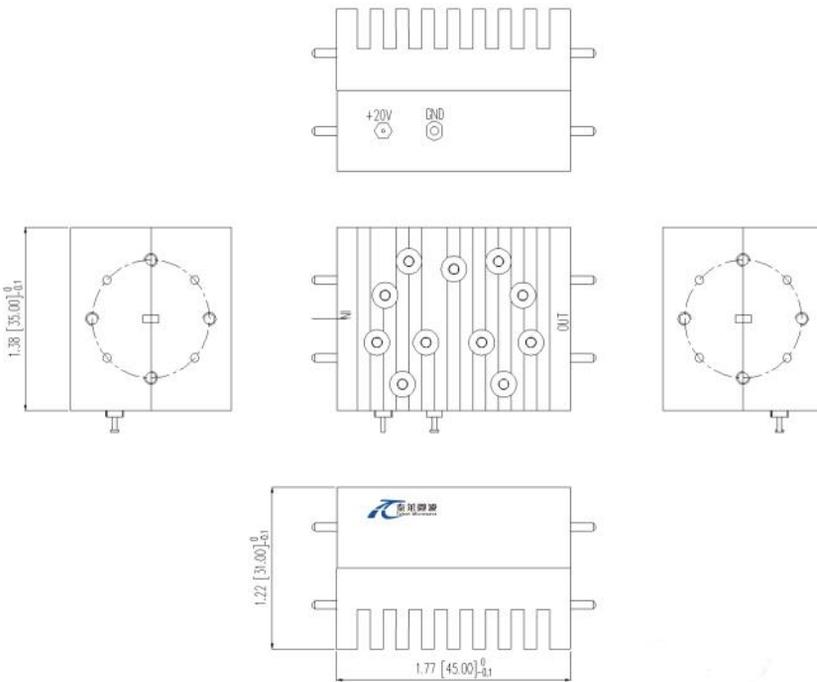

## 温度环境 Environmental Conditions:

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	+10		+50	°C
存储温度 Non-operating Temperature	0		+50	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
------------------	----------------	-------------