

## Passive Frequency Multiplier

WR-5.1/X2/140-220GHz /10dBm Output Power

Model: TPM-140220-0213-05

TPM-140220-0213-05 is a WR-5.1 X2 passive multiplier that generates second order harmonics with good harmonic and fundamental suppression. This multiplier requires an input frequency range of 140 to 220 GHz at 250 mW RF power to yield typical +10 dBm output power at 140 to 220 GHz. The multiplier is equipped with a WR-10 waveguide and UG-387/U-M flange as its input port and a WR-5.1 waveguide and UG-387/U-M flange as its output port.

### Features:

- Output Frequency:140-220 GHz
- Output Power : 10 dBm Typ
- Compactness,High Power&Efficiency

### Applications:

- Frequency Extenders
- THz Systems
- Source Modules

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
输出频率 Output Frequency	140		220	GHz
输入频率 Input Frequency	70		110	GHz
输出功率 Output Power		10	15	dBm
输入功率 Input Power		250	350	mW
倍频次数 Multiply Factor		2		
谐波抑制 Harmonic Suppression		-20		dBc

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输出接口 Output Connector	WR-5.1/UG-387/U	
输入接口 Input Connector	WR-10/UG-387/U	

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
输入功率 RF Input Power	350 mW
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm

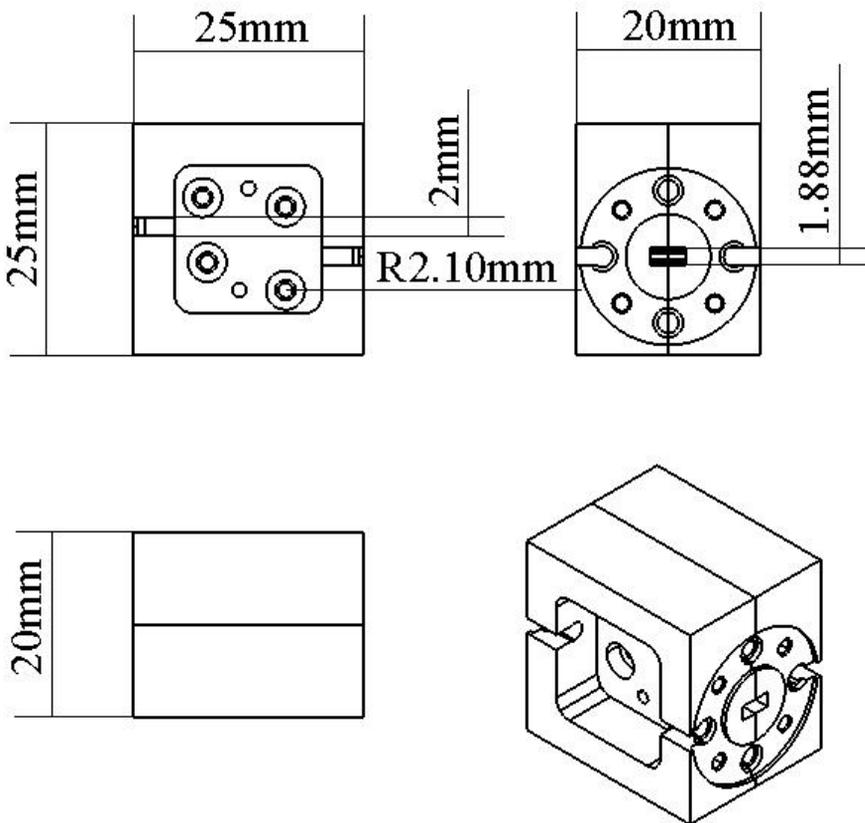

### 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

### 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TMPM-140220-0213-05	Passive Frequency Doubler X2,140-220GHz,10dBm Output Power,WR-5.1	Rev.1.1

### 典型曲线 Typical Performance Data:

