

Coaxial Termination

DC-4GHz/BNC Male/10W

Model:TT10-4-BNC

The TT10-4-BNC is a well-matched, 50Ω male termination enabling operation from DC to 4 GHz. This termination features a 10W power rating and 1.25:1 @DC-4GHz max VSWR.

Features:

- Operating Frequency DC to 4 GHz
- High Return Loss
- Instrumentation Grade

Applications:

- laboratory test
- Communication equipment


电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency Range	DC		4	GHz
驻波 VSWR	DC-3GHz		1.20	:1
	DC-4GHz		1.25	:1
耐功率 Power Handling	≤10Watts Average at 25°C			W
阻抗 Impedance		50		Ohms

环境和机械特性 Environmental And Physical Characteristics:

类型 Description	参数 Parameter	单位 Units
操作温度 Operating Temperature	-55 To +100	°C
存储温度 Storage Temperature	-55 To +100	°C
内导体 Inner Conductor	Gold-plated,Phosphor bronze	
接口 Connectors	BNC Male,Nickel plated Brass	
重量 Weight	50	g

外形图 Outline Drawing: Unit:mm

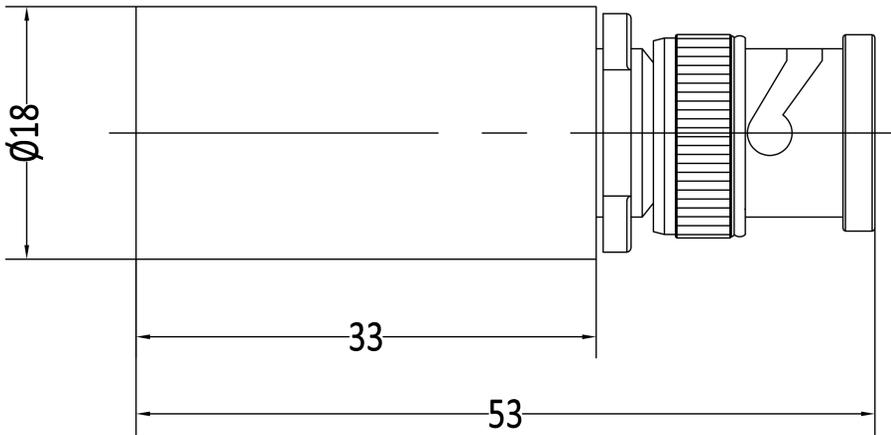

订货信息 Ordering Information:

标准型号 Base Number	描述 Description
TT10-4-BNC	DC-4GHz,10W,BNC male Coaxial Termination