


	<b>Product Specification</b>	<b>Product Model</b>
		<b>VNA-NMD2.4F-2.4F-25IN</b>

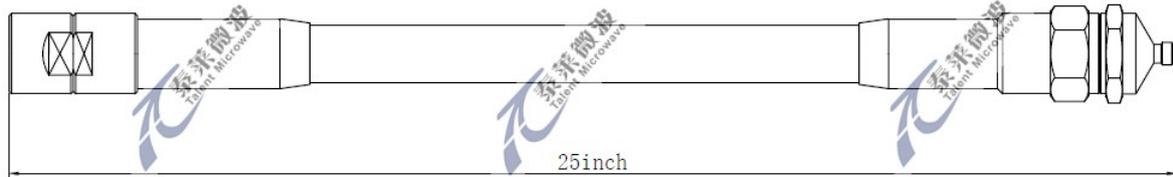

**Physical & Mechanical Specifications**

Cable Outer Diameter	15.2 mm Max	
Min Bending Radius	50 mm	
Length	63cm (25inch)	
Connector	NMD2.4mm Female	2.4mm Female
Recommended Torque	0.9 Nm	0.9 Nm
Mating Times	>10000	
Temperature	-40+85°C	
Connector center Conductor Material/Plating	Beryllium Copper, Gold Plated	
Connector Body Material	Stainlessness steel , passivated	
Cable Dielectric Material	PTFE	
Cable Jacket	Multilayers jacket	

**Electrical Specifications**

Frequency	DC-50GHz	Impedance	50Ohms
VSWR	1.3 Max	Insulation Resistance	5000 MΩ
Insertion loss	<3.0dB	Shielding Effectiveness	>90dB
Specification temperature	25°C	Voltage Withstand	500V,DC
Phase Stability	<±3°		
Amplitude Stability	<±0.05dB		

## Test Data

