

Dual Balance Mixer

RF:10-44 GHz/LO:10-44 GHz/IF:DC-14 GHz

TLBM-1044-LS

TURBM-1044LS is a dual balance mixer. The mixer covers the LO and RF frequency from 10 to 44 GHz with an extremely broad IF output from DC to 14 GHz. The mixer offers a conversion loss of 10 dB typical and LO input power of 10 dBm typical.

Features:

- RF/LO coverage : 10-44 GHz
- IF operation : DC-14GHz
- Conversion loss: 10dB Typ
- High LO to RF isolation
- Dual Balanced Mixer

Applications:

- Defense & federal communications
- Instrumentations

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
RF频率 RF Frequency	10		44	GHz
LO频率 LO Frequency	10		44	GHz
LO 驱动功率 LO-Input power		10	15	dBm
IF频率 IF Frequency	DC		14	GHz
输入P1dB Input P1dB		5		dBm
RF至IF隔离度 RF to IF Isolation		35		dB
RF至LO隔离度 RF to LO Isolation		45		dB
LO至IF隔离度 LO to IF Isolation		45		dB
变频损耗 Conversion Loss@IF=100MHz		10		dB

机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
端口1 Connector 1	2.4mm Female	
端口3 Connector 3	2.4mm Female	

接口定义 Connector Functions:

应用1

端口 Port	功能 Function
Connector 3	LO
Connector 2	IF
Connector 1	RF


应用2

端口 Port	功能 Function
Connector 3	RF
Connector 2	IF
Connector 1	LO

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
LO功率 LO Input Power	15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

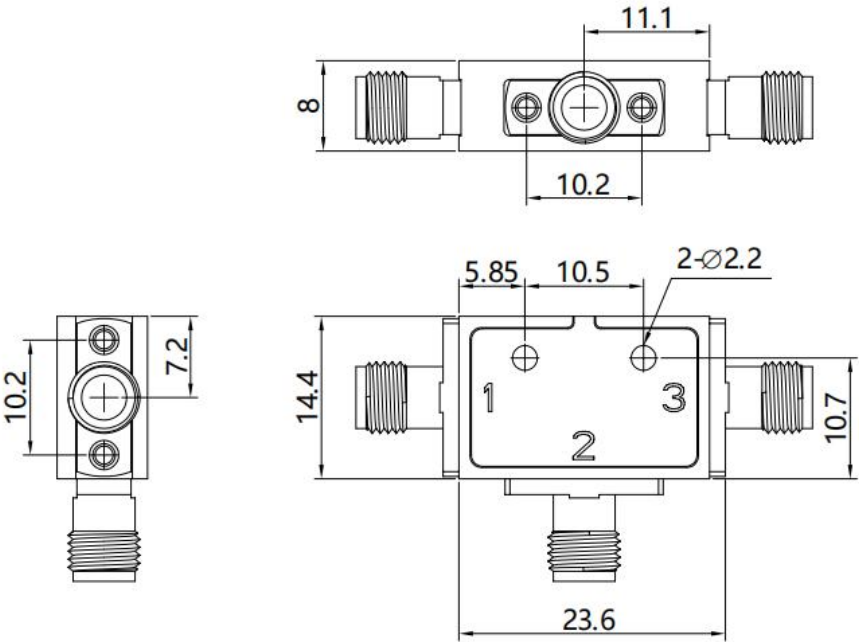


温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	0		+50	℃
存储温度 Non-operating Temperature	-45		+85	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURBM-1044LS	Dual Balanced Mixer RF:10-44GHz,LO:10-44GHz,IF:DC-14GHz	Rev.1.1

典型曲线 Typical Performance Data:

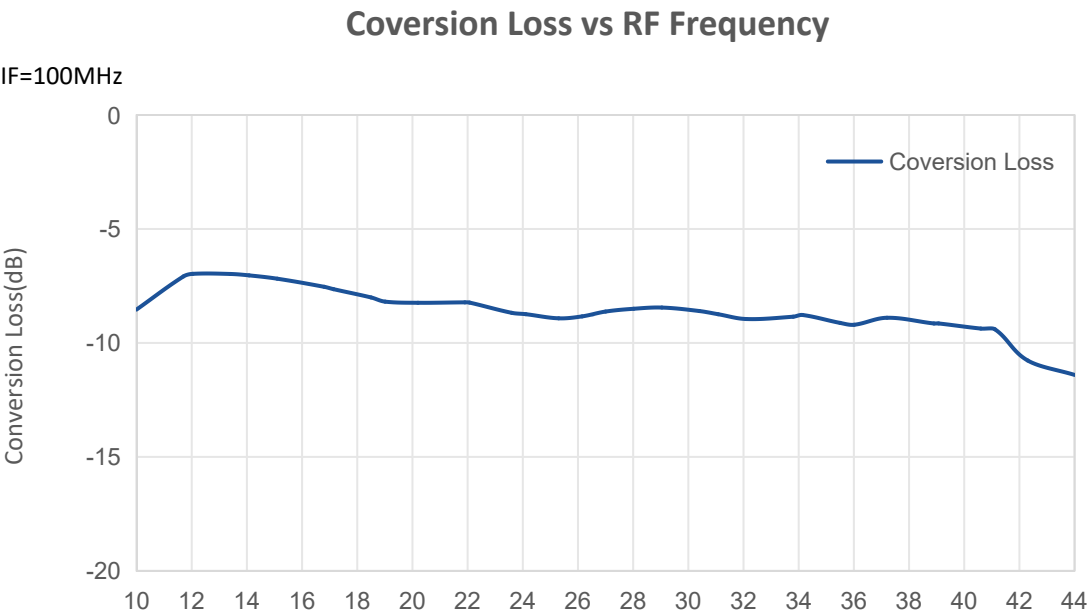

典型曲线 Typical Performance Data:

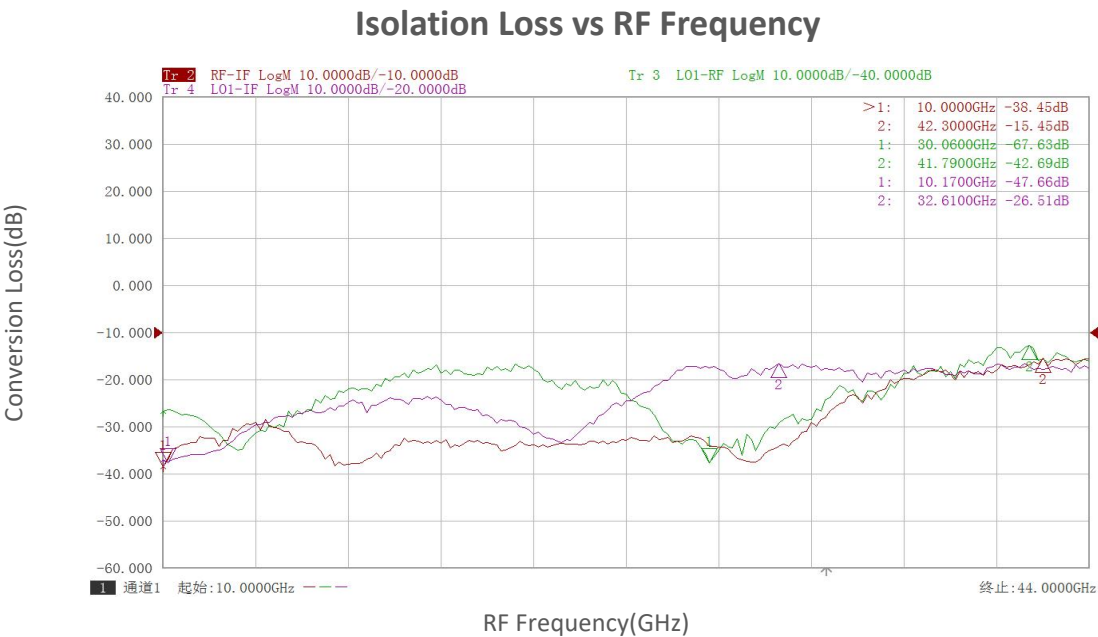

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.