

## D-Band Fundamental

RF:110-170 GHz/LO:110-170 GHz/IF:DC-30 GHz

TLBM-110170-30-06

TURBM-1101703006 is a D-Band Fundamental mixer. The mixer supports the full waveguide band operation for LO and RF frequency from 110 to 170 GHz with an extremely broad IF output from DC to 30 GHz. The mixer offers a conversion loss of 11dB@IF=1GHz maximum and LO input power of 7 dBm typical.

### Features:

- RF Frequency range: 110-170GHz
- LO Frequency range: 110-170GHz
- IF Frequency range: DC-30GHz
- Low LO Power Requirement
- Subharmonic Mixing
- Compact Package

### Applications:

- Radar Systems
- Communication Systems
- Test Equipment

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
RF频率 RF Frequency	110		170	GHz
LO频率 LO Frequency	110		170	GHz
IF频率 IF Frequency	DC		30	GHz
LO驱动功率 LO Input Power		7		dBm
变频损耗 Conversion Loss@IF=1GHz		11		dB
变频损耗 Conversion Loss@LO=110GHz		12		dB
偏置电压 Bias Voltage	-1.2	-1	-0.8	V DC


## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
RF 接口 RF Connector	WR-6.5/UG-387/U	
LO 接口 LO Connector	WR-6.5/UG-387/U	

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
RF 功率 RF Input Power	13 dBm
IF 功率 IF Input Power	13 dBm
LO 功率 LO Input Power	13 dBm
偏置电压 Bias Voltage	-2V~0V
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing: Unit:mm

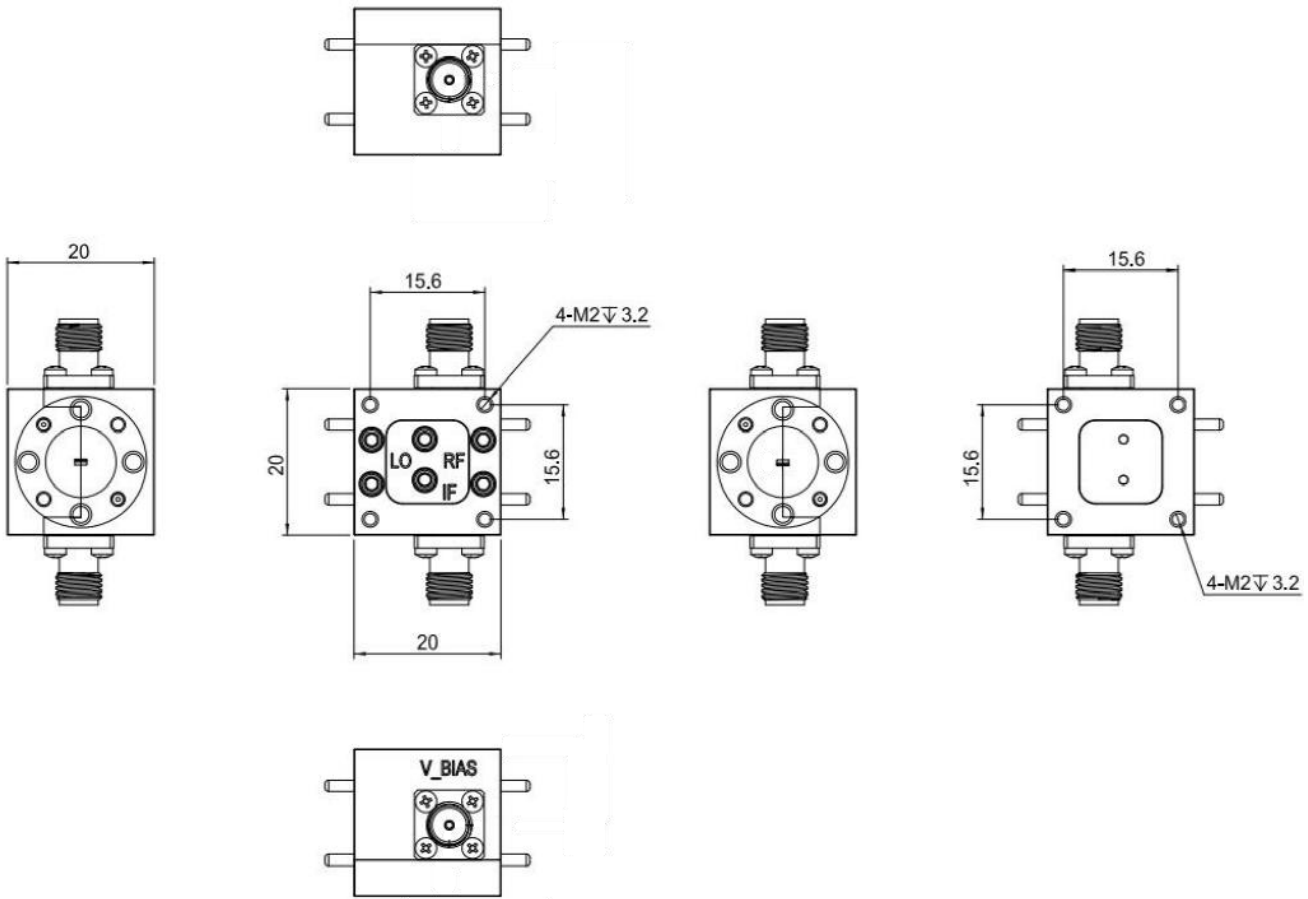

ESD Protection: Strictly adhere to ESD precautions

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURBM-1101703006	D-Band Fundamental Mixer RF:110-170GHz,LO:110-170GHz,IF:DC-30GHz	Rev.1.1