

7-Bit Digital Attenuator

0.5dB LSB/7 Bit/ 0.8-18GHz

TLDA0.8G18G-63-7

The TURDA0.8G18G-637 is an broadband digitally controlled electrical attenuator operating from 0.8 to 18 GHz. The attenuator exhibits 8 dB typical insertion loss and offers 63 dB nominal attenuation control range in 0.5 dB steps under a 7-bit digital control. The control speed of the attenuator is 100 ns. The RF input and output ports are female SMA female coax connectors, and a male J30J-9ZKP port is employed for providing the control signal and DC bias.

Features:

- Ultra Wide Band: 0.8-18GHz
- 7-Bit, 0.5 dB LSB, 63 dB Range
- Low Insertion Loss
- High Attenuator Accuracy

Applications:

- Radar Systems
- Communication Systems
- Testing Equipment

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.8-18			GHz
插损 Insertion Loss		8	9	dB
衰减范围 Attenuation Range	63			dB
控制位数 Control Bit TTL	7			Bit
衰减步进 Attenuation Step	0.5			dB
切换速度 Switch Speed			100	ns
输入驻波 Input VSWR		1.8	2.0	:1
输出驻波 Output VSWR		1.8	2.0	:1
最大输入功率 Input Max Power	25			dBm
直流电压 DC Voltage	+5			V DC
直流电流 DC Supply Current			50	mA
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
DC控制接口 DC control interface	J30J-9ZKP	
尺寸 Size	54*39*14.5	mm
重量 Weight	/	g

绝对最大值 Absolute Maximum Ratings :

描述 Description	参数 Parameter	单位 Units
供电偏置电压 Supply Bias Voltage	±5 (+5%)	V
射频输入功率 RF Input Power	25	dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V	

外形图 Outline Drawing:

Unit:mm

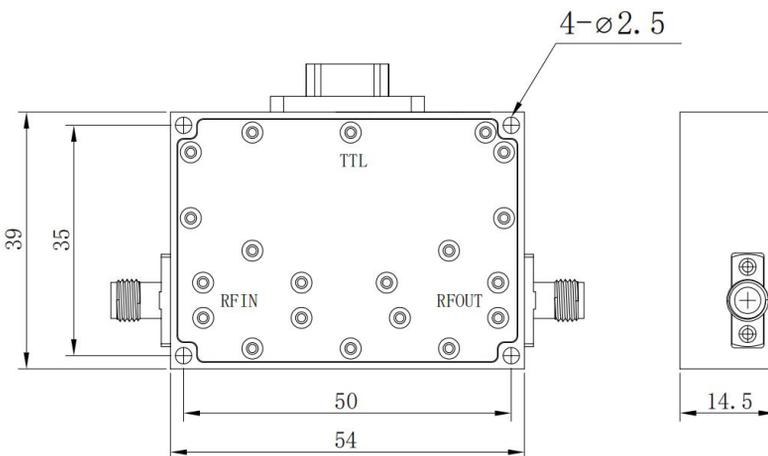

真值表 Truth Table

TTL Control Input							Signal Path State
C1	C2	C3	C4	C5	C6	C7	
0	0	0	0	0	0	0	Reference
1	0	0	0	0	0	0	0.5
0	1	0	0	0	0	0	1
0	0	1	0	0	0	0	2
0	0	0	1	0	0	0	4
0	0	0	0	1	0	0	8
0	0	0	0	0	1	0	16
0	0	0	0	0	0	1	31.5
1	1	1	1	1	1	1	63

OBSERVE PRECAUTIONS
 ELECTROSTATIC SENSITIVE

直流供电接口 DC Supply Conector(J30J-9ZKP):


J30J-9ZKP	
引脚Pin#	功能Function
1	+5V
2	C1
3	C2
4	C3
5	C4
6	GND
7	C5
8	C6
9	C7

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

典型曲线 Typical Performance Data:

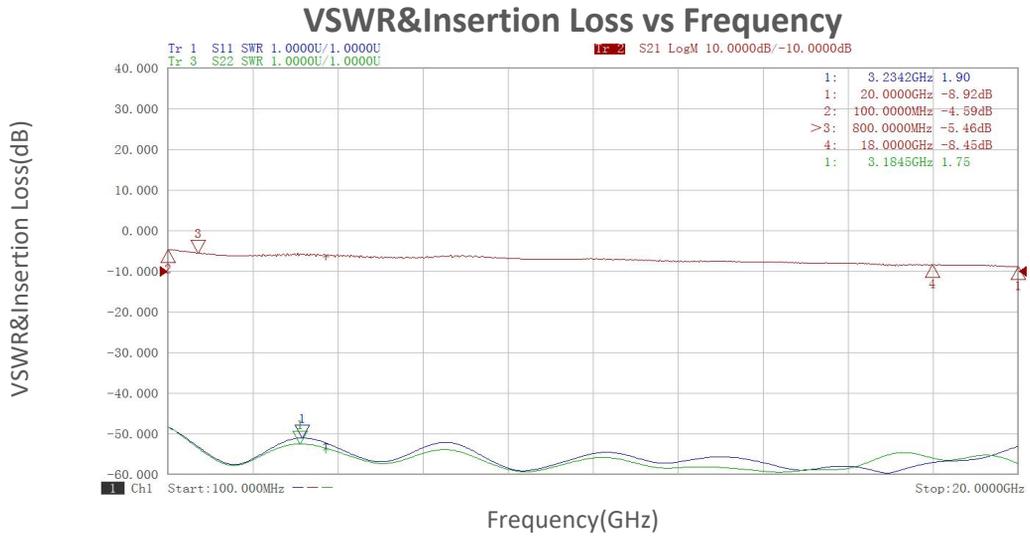

0.5dB:

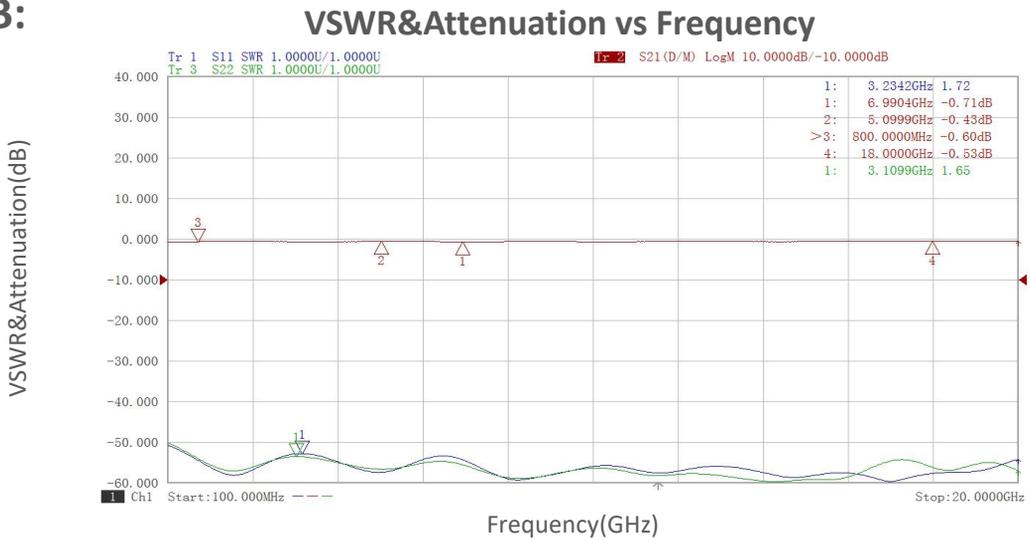


1dB:




典型曲线 Typical Performance Data:


2dB:

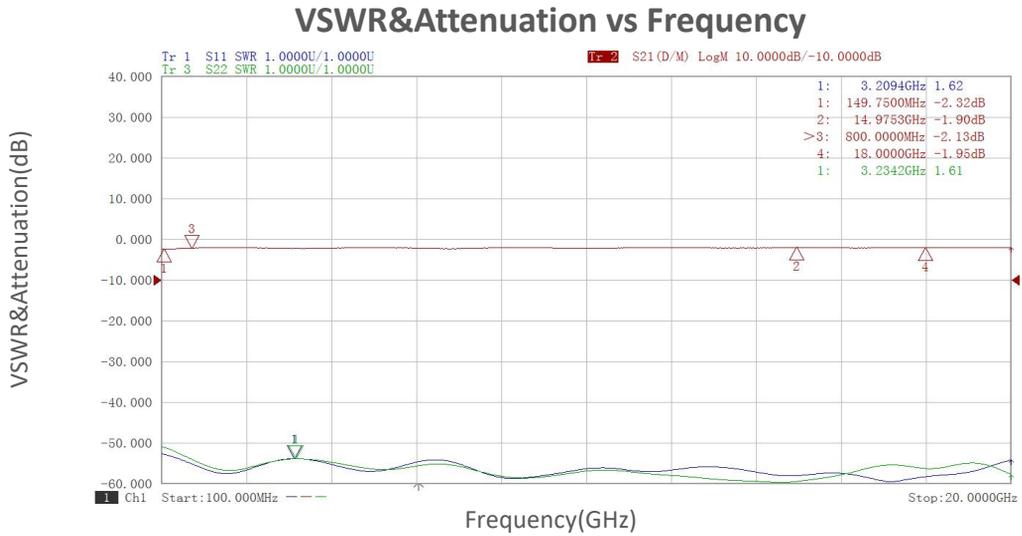

4dB:

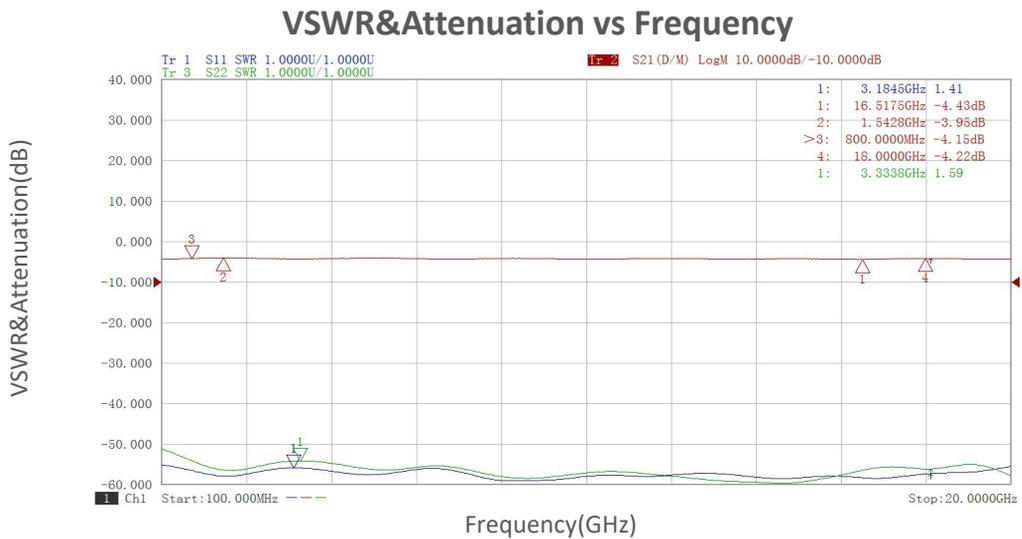


8dB:

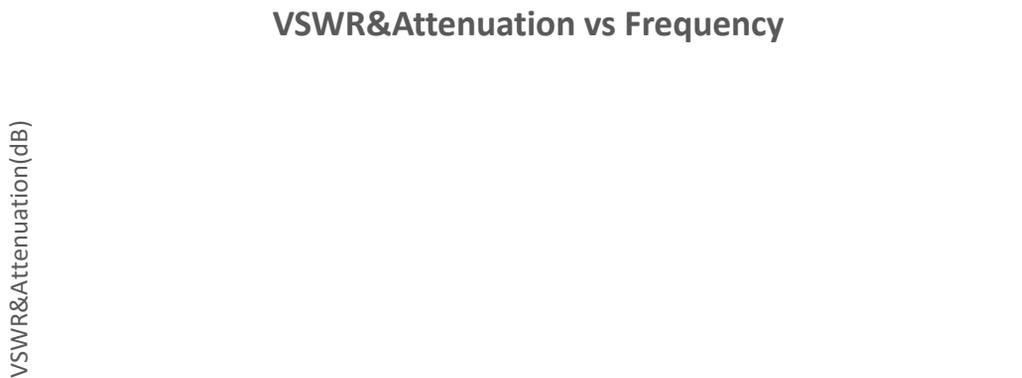

典型曲线 Typical Performance Data:


16dB:

VSWR&Attenuation vs Frequency

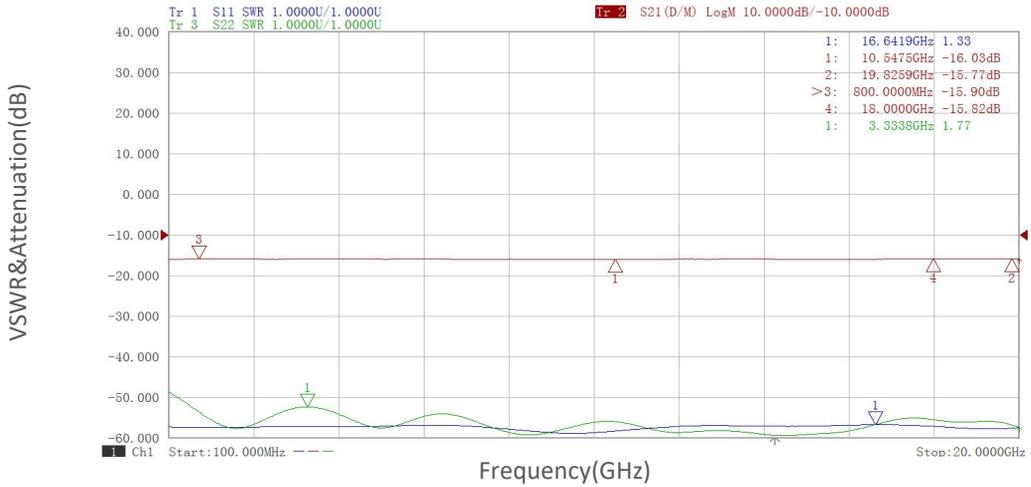

31.5dB:

VSWR&Attenuation vs Frequency

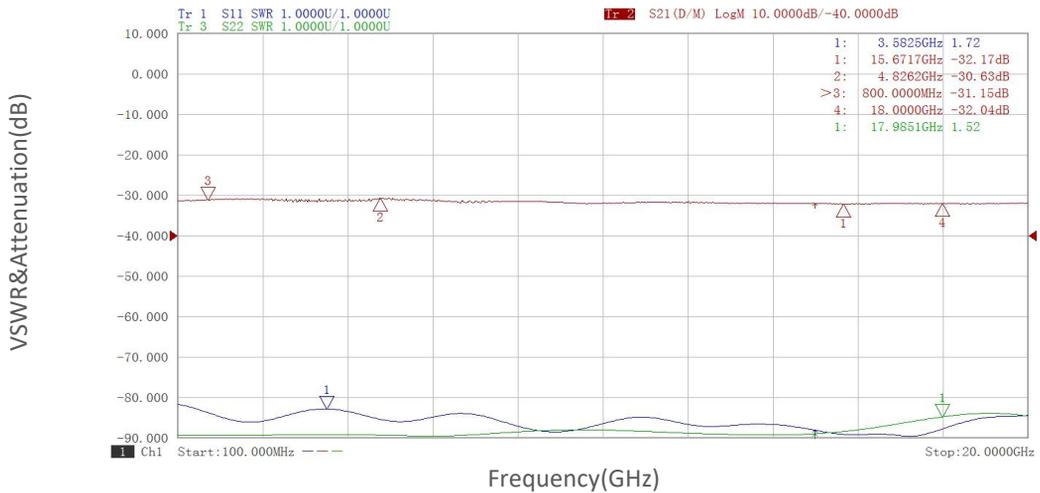

63dB:

VSWR&Attenuation vs Frequency

VSWR&Attenuation(dB)