

Low Noise Amplifier

0.02-6GHz/2dB NF/50dB Gain/18dBm P1dB

TLLA0.02G6G-50-20

TURLA0.02G6G-5020 is a low noise amplifier with a typical small signal gain of 50 dB and a nominal noise figure of 2 dB across the frequency range of 0.02 to 6 GHz. The DC power requirement for the amplifier is +8 V DC/150 mA. The input and output port configuration offers coax adapter structure with SMA female.

Features:

- Frequency range:0.02-6GHz
- Gain: 50dB Typ
- Noise Figure: 2dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.02		6	GHz
小信号增益 Small Signal Gain	48	50		dB
噪声系数 Noise Figure		2		dB
线性输出功率 Output P1dB		18		dBm
饱和输出功率 Output Psat		19.5		dBm
输入驻波 Input VSWR		1.8		:1
输出驻波 Output VSWR		1.8		:1
直流电压 DC Voltage		8	12	V DC
直流电流 DC Supply Current		150		mA
阻抗 Impedance		50		Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

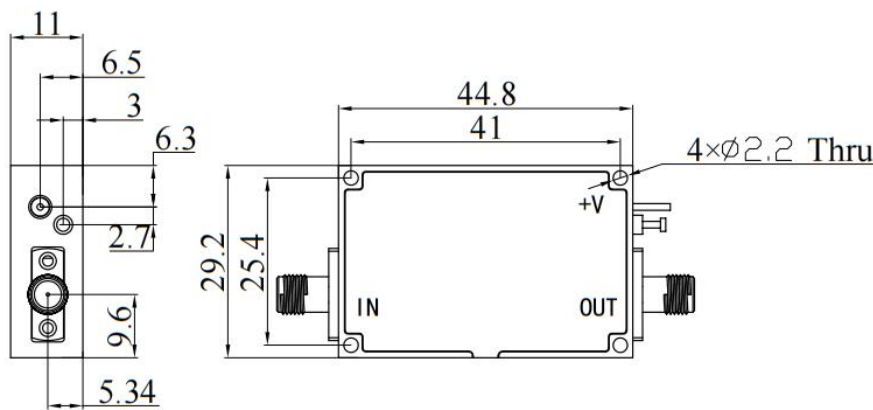

***Heat Sink Required During Operation



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-45		+85	℃
存储温度 Non-operating Temperature	-55		+125	℃
相对湿度 Relative humidity		95		%
海拔 Altitude		10,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURLA0.02G6G-5020	Low Noise Amplifier, 0.02-6GHz, Noise Figure:2dB, Gain:50 dB,P1dB:18dBm,+8V DC,Without Heatsink	Rev.1.1
TURLA0.02G6G-5020 HS	Low Noise Amplifier, 0.02-6GHz, Noise Figure:2dB, Gain:50 dB,P1dB:18dBm,+8V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:



Gain&VSWR vs Frequency

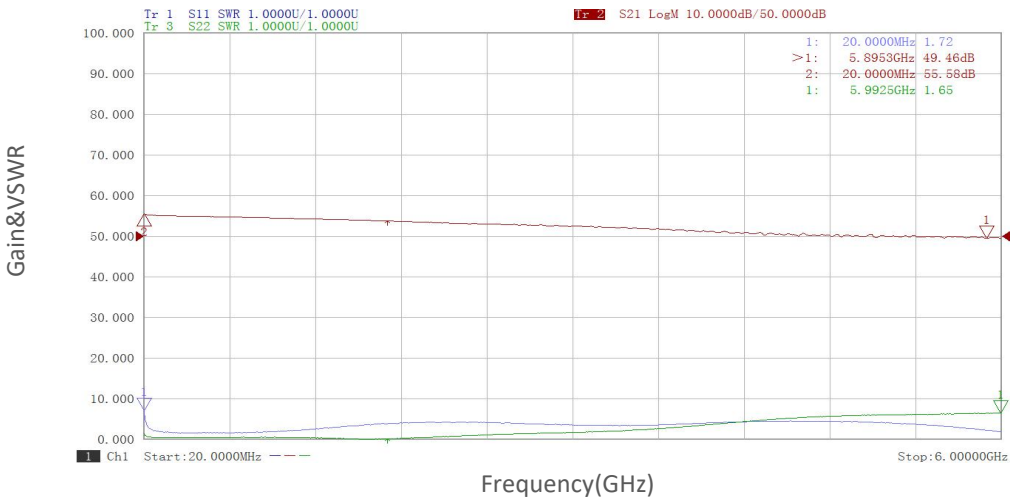

Noise Figure vs Frequency




典型曲线 Typical Performance Data:

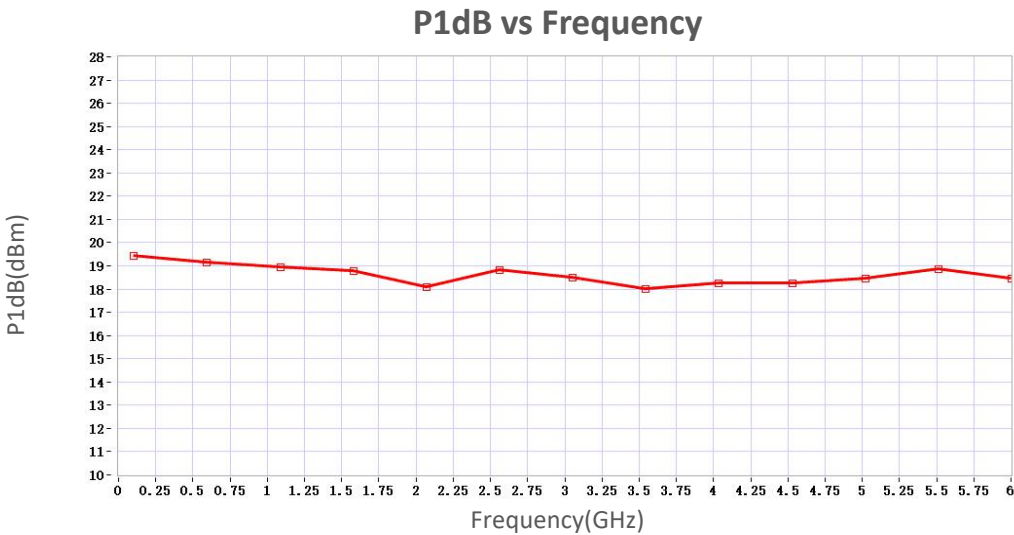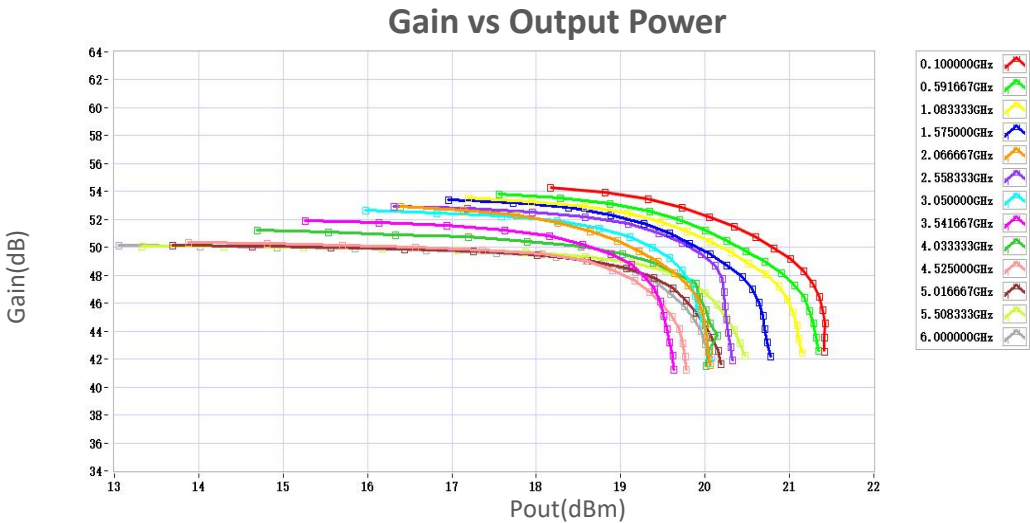

P3dB vs Frequency

P3dB(dBm)

典型曲线 Typical Performance Data:

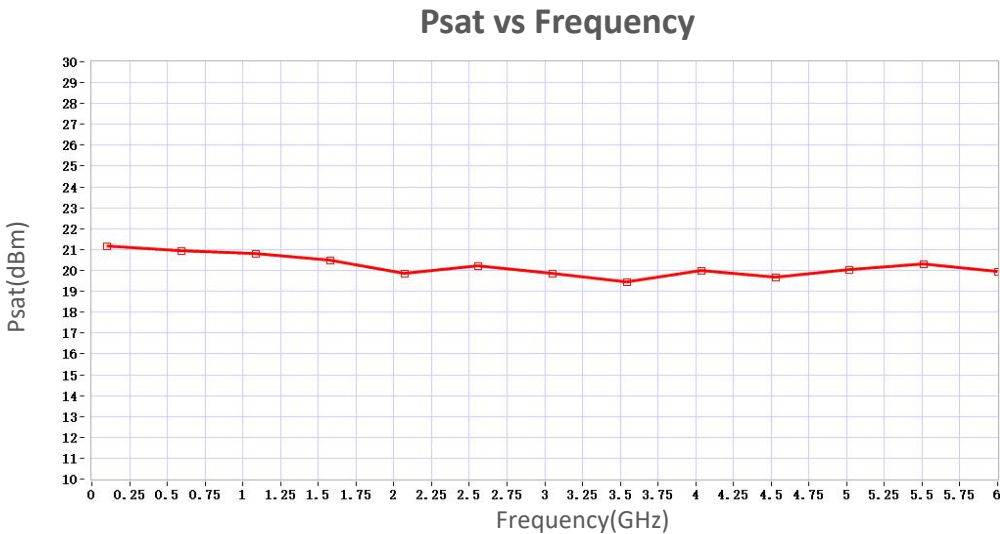

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.