

Power Amplifier
18-40GHz/40dB Gain/37dBm Psat

TLPA18G40G-40-37

TURPA18G40G-4037 is a power amplifier with a minimum small signal gain of 40 dB and a nominal Psat of 37 dBm across the frequency range of 18 to 40 GHz. The DC power requirement for the amplifier is +20 VDC/90W. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 18-40GHz
- Gain: 40dB Min
- Output Power Psat: 37dBm Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:




- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	18-40			GHz
小信号增益 Small Signal Gain	40	45		dB
线性输出功率 Output P1dB	30	32		dBm
饱和输出功率 Output Psat		37		dBm
杂散 Spurious			-50	dBc
输入驻波 Input VSWR		2		:1
直流电压 DC Voltage		20		V DC
功耗 Power Consumption			90	W
阻抗 Impedance	50			Ohms

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	
直流偏置 DC Bias	Feedthru capacitors	
尺寸 Size	60*60*11(Without heatsink) 188*125*135(With heatsink)	mm
重量 Weight	≤200	g

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+22 V
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

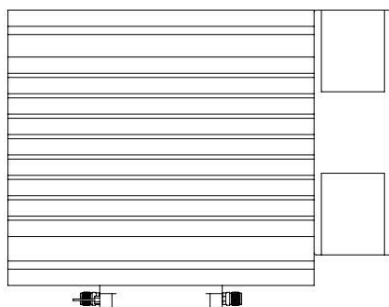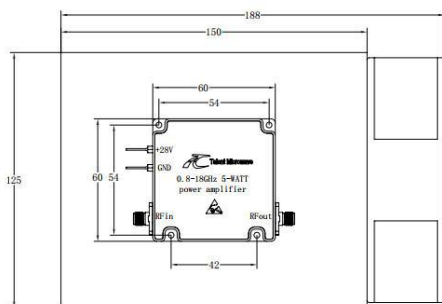



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-40		+60	℃
存储温度 Non-operating Temperature*	-50		+70	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:




标准型号 Base Number	描述 Description	版本号 Revision
TURPA18G40G-4037	Power amplifier 18-40GHz, Gain:40dB,Psat:37dBm,+20V DC,Without Heatsink	Rev.1.1
TURPA18G40G-4037 HS	Power amplifier 18-40GHz, Gain:40dB,Psat:37dBm,+20V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

Input VSWR vs Frequency

Input VSWR

典型曲线 Typical Performance Data:

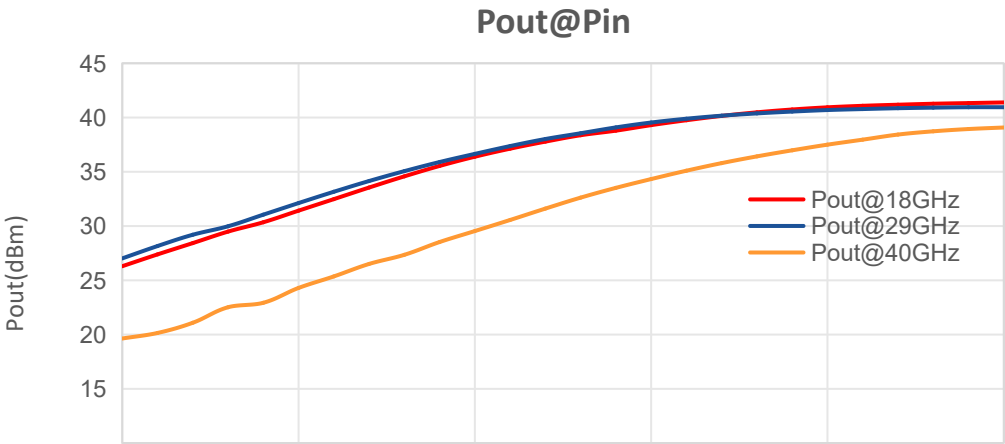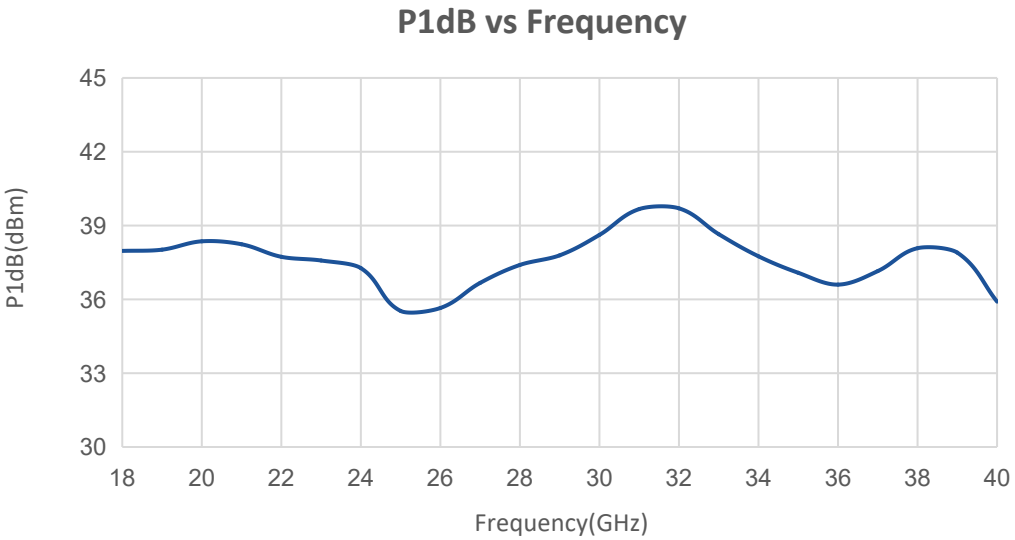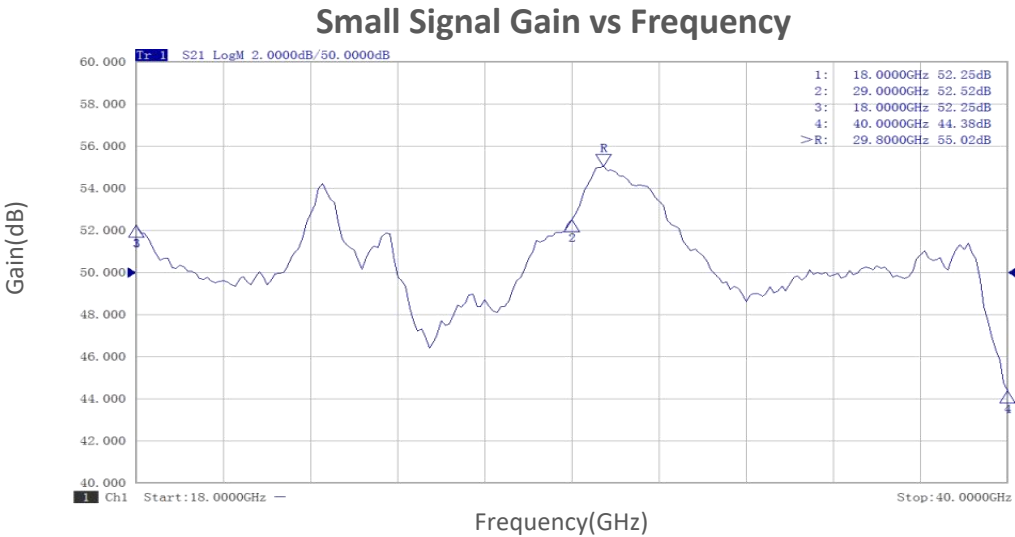

典型曲线 Typical Performance Data:

