

SP6T Coaxial Switches

R16-NN12T12-D , Coaxial Switches , 1P6T , N , Normally Open , 12VDC , TTL , DC to 12.4 GHz , DSUB-15

R16-NN24T12-D , Coaxial Switches , 1P6T , N , Normally Open , 24VDC , TTL , DC to 12.4 GHz , DSUB-15

R16-NN28T12-D , Coaxial Switches , 1P6T , N , Normally Open , 28VDC , TTL , DC to 12.4 GHz , DSUB-15

电气参数 Electrical Characteristics:

参数Parameter	条件Condition
频率范围 Frequency range	DC-12.4GHz
阻抗 Impedance	50 Ω
开关模式 Operation mode	Normally open
开关顺序 Switch sequence	Break before make
切换时间 Switching time	15 ms max
机械寿命 Mechanical life	1 million min
TTL input	0-0.8 V(OFF), 2.4-5 V(ON)
额定电压 Rated voltage	12 24 28 VDC
工作电流 Operating current at 23 °C	150 75 65 mA




射频特性 RF Specifications:

频率范围 FREQUENCY RANGE(GHz)	DC-3	3-8	8-12.4
插入损耗INSERTION LOSS (MAX) dB	0.3	0.5	0.7
隔离度 ISOLATION (MIN) dB	70	60	50
电压驻波比 V.S.W.R. (MAX)	1.3:1	1.5:1	1.7:1

环境和物理特性 Environmental And Physical Characteristics:

参数Parameter	条件 Condition
工作温度范围 Operating temperature range	-25°C to +65°C(Standard) -55°C to +85°C(Optional)
振动 Sine vibration(Operating)	20-2000Hz , 10g
冲击 Shocks(Non Operating)	50g / 11ms, ½ sine
射频接口 RF Connector type	N Female

针脚定义 Pin Definition:

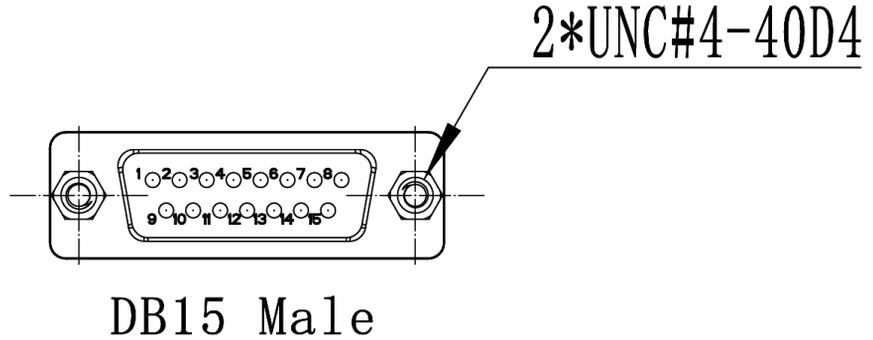

15 PIN D-SUB		RF Connect Used
Pin NO.	Function	SP6T
1	A1(TTL IN)	1
2	A2(TTL IN)	2
3	A3(TTL IN)	3
4	A4(TTL IN)	4
5	A5(TTL IN)	5
6	A6(TTL IN)	6
7	COM-	
15	+VDC	
8-14	UNUSED	

标准型号 Part Number:

标准型号 Part Number

1P6T

R16-NN12T12-D

额定电压
Rated Voltage

12VDC

可选项 Option

-S