

Cryogenic Coax Attenuators DC-40GHz/2W/2.92mm/Non-Magnetic

Model:TAXXA2-2.92-40-Cryo

TAXXA2-2.92-40-Cryo is working to customize and optimize fixed attenuators for use in cryogenic cooling systems to support quantum computing. Eliminating thermal noise in a quantum computing installation demands a high degree of innovation and reliability. TAXXA2-2.92-40-Cryo's experience delivering custom components for use in harsh environments and high reliability requirements, is the foundation supporting our work in cryogenic technology.

Features:

- Frequency: DC to 40 GHz
- Max Power: 2W
- Capable of operation at 10 mK
- Non-Magnetic
- 50 Ohm Matched Input / Output

Applications:

- Dilution refrigerators/Cryogenic devices
- Quantum Computing

电气特性 Electrical Characteristics:


参数 Parameter		Min	Typ	Max	单位 Units
频率范围 Frequency range		DC-40			GHz
标准衰减值 Standard dB Values		0~10/12/15/20/30			dB
衰减精度 Attenuation Accuracy	0dB			±0.8	dB
	1-6dB			±0.8	
	10-15dB			±1.0	
	20-30dB			±1.5	
驻波 VSWR	DC-18GHz			1.30	:1
	18-26.5GHz			1.35	
	26.5-40GHz			1.40	
输入功率 Input Power				2	W
阻抗 Impedance		50			Ohms

机械特性 Mechanical Specifications:

描述 Description	参数 Parameter	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Male/2.92mm Female	
外壳材质 Case Material	OFHC Copper	
表面 Finish	Gold Plated	
电阻材料 Resistor Material	Proprietary Thin Film	

外形图 Outline Drawing:

Unit:mm

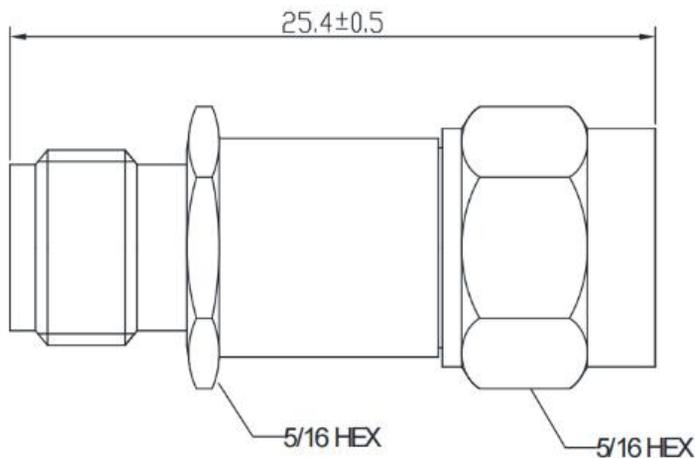

温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	10mK		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity	100% RH at 35c, 95%RH at 40°C			%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TA00A2-2.92-40-Cryo	0dB	Rev.1.1
TA01A2-2.92-40-Cryo	1dB	Rev.1.1
TA02A2-2.92-40-Cryo	2dB	Rev.1.1
TA03A2-2.92-40-Cryo	3dB	Rev.1.1
TA04A2-2.92-40-Cryo	4dB	Rev.1.1
TA05A2-2.92-40-Cryo	5dB	Rev.1.1
TA06A2-2.92-40-Cryo	6dB	Rev.1.1
TA07A2-2.92-40-Cryo	7dB	Rev.1.1
TA08A2-2.92-40-Cryo	8dB	Rev.1.1
TA09A2-2.92-40-Cryo	9dB	Rev.1.1
TA10A2-2.92-40-Cryo	10dB	Rev.1.1
TA12A2-2.92-40-Cryo	12dB	Rev.1.1
TA15A2-2.92-40-Cryo	15dB	Rev.1.1
TA20A2-2.92-40-Cryo	20dB	Rev.1.1
TA30A2-2.92-40-Cryo	30dB	Rev.1.1