

30.5dB Directional Coupler 0.09-0.45GHz

电气特性 Electrical:


工作频率 Frequency Range:	90-450MHz
耦合度Coupling :	30.5 ± 1.0dB
插入损耗 Insertion Loss:	0.35dB Max
驻波 VSWR:	1.10:1 Max
方向性 Directivity:	30.0dB Min
耐功率 Power Handling:	200 Watt
阻抗 Impedance:	50 OHMS

机械特性 Mechanical:


温度范围Temperature Range:	-55° C - +105° C
大小Size:	38.1mm*25.4mm
厚度Thickness:	1.8mm
相对湿度Relative Humidity:	0 ~ 90%

外形尺寸Outline Drawing:

Unit: mm

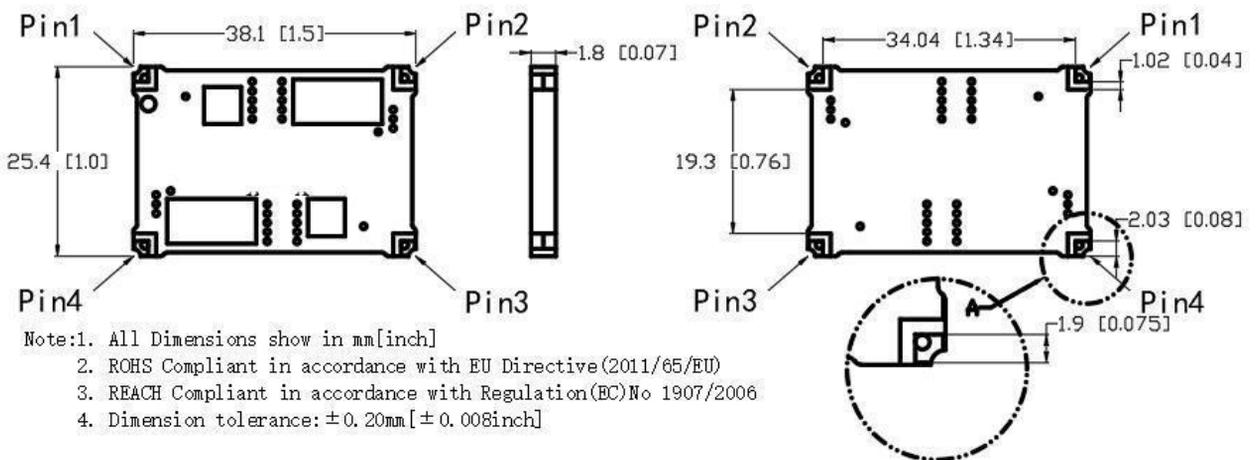

Hybrid Coupler Pin Configuration

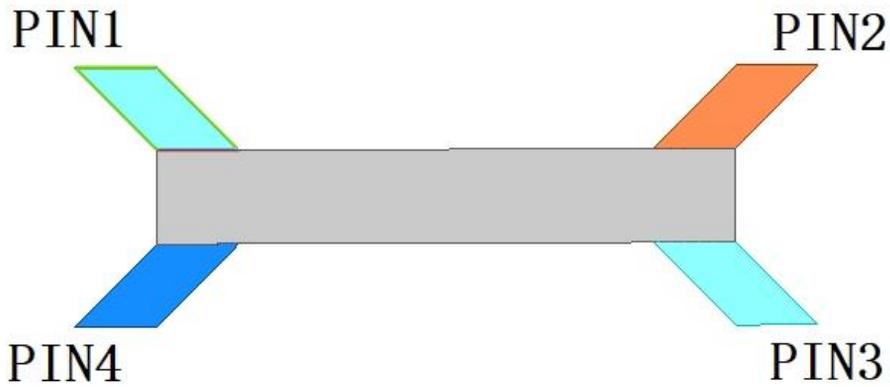


PIN1	PIN2	PIN3	PIN4
Input	Reflected Coupled	Transmission	Forward Coupled
Transmission	Forward Coupled	Input	Reflected Coupled


Typical Performance Data

Frequency	MHz	90	100	150	200	250	300	350	400	450
Coupling	dB	-31.47	-31.05	-30.10	-29.94	-30.05	-30.09	-30.21	-30.38	-30.40
Insertion Loss	dB	-0.031	-0.036	-0.065	-0.09	-0.13	-0.18	-0.21	-0.27	-0.34
Directivity	dB	-36.09	-35.17	-35.76	-38.19	-43.13	-61.58	-43.32	-37.42	-33.69
VSWR	Input	/	1.03	1.03	1.02	1.02	1.02	1.03	1.04	1.05
	Transmission	/	1.01	1.01	1.02	1.02	1.01	1.01	1.01	1.02

Input VSWR vs Frequency

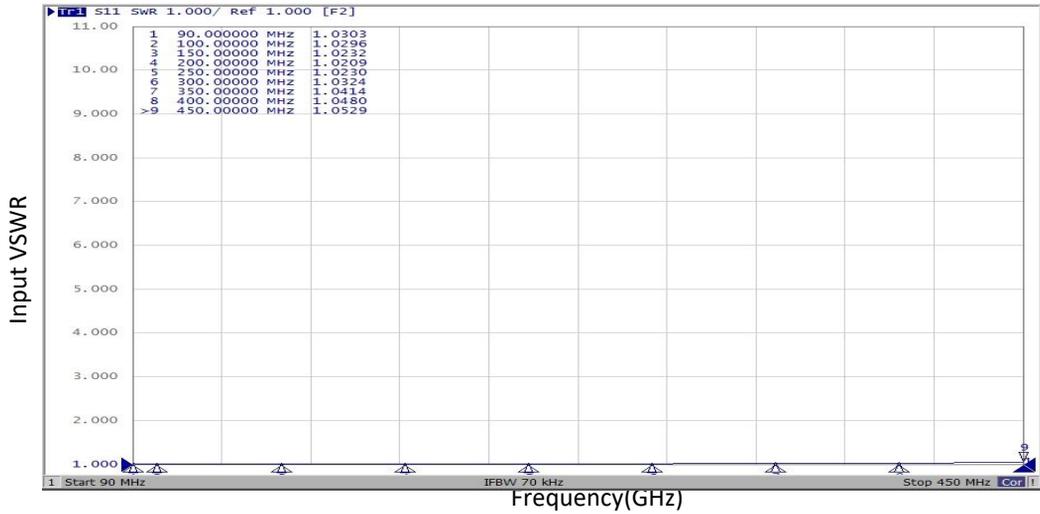

Transmission VSWR vs Frequency

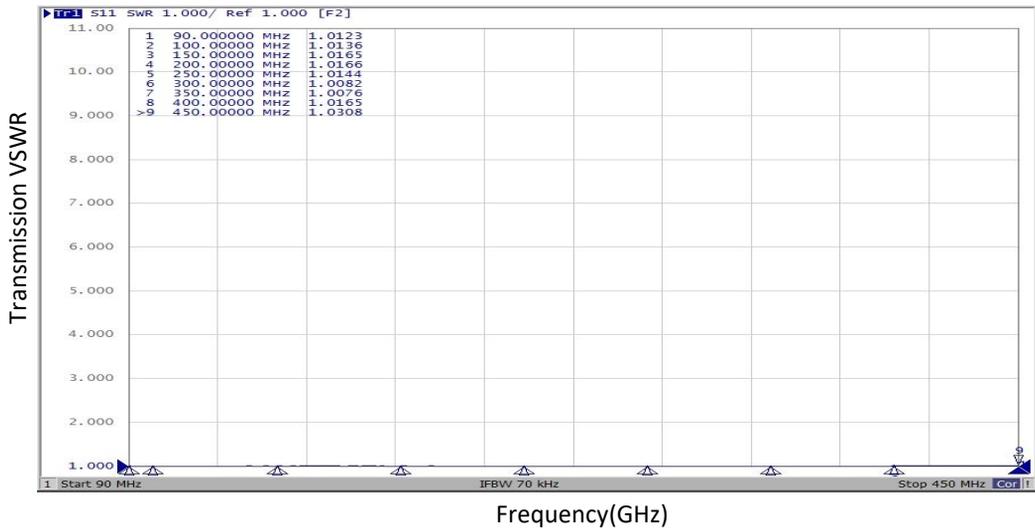

Coupling vs Frequency

uplig(dB)

Isolation vs Frequency



Insertion Loss vs Frequency

