

Low Noise Amplifier

30MHz-6GHz/3.0dB NF/35dB Gain/15dBm P1dB

Model: TLLA30M6G-35-30

TLLA30M6G-35-30 is a low noise amplifier with a minimum small signal gain of 35 dB and a nominal noise figure of 3.0 dB across the frequency range of 30MHz to 6 GHz. The DC power requirement for the amplifier is +12 V DC/150 mA. The input and output port configuration offers coax adapter structure with 2.92mm female.

Features:

- Frequency range: 30MHz-6GHz
- Gain: 35dB Min
- Noise Figure: 3.0dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Communication systems

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	30MHz-6GHz			
小信号增益 Small Signal Gain	35	37		dB
增益平坦度 Gain Flatness		±1.5		dB
噪声系数 Noise Figure		3.0		dB
线性输出功率 Output P1dB		15		dBm
输入驻波 Input VSWR			2	:1
输出驻波 Output VSWR			2	:1
直流电压 DC Voltage	+10	+12	+15	V DC
直流电流 DC Supply Current		150		mA
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/2.92mm Female	
直流偏置 DC Bias	Solder Pin	

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+15 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

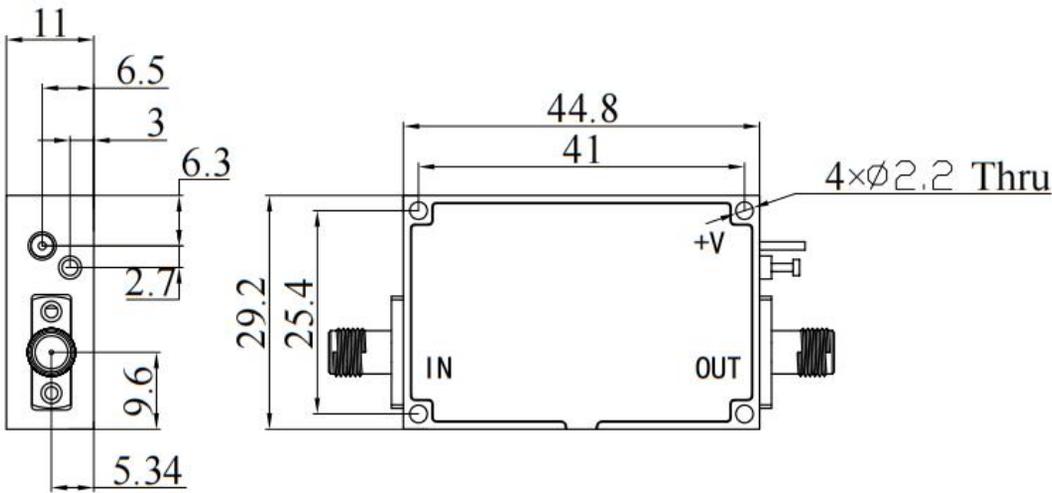

*****Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-40		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TLLA30M6G-35-30	Low Noise Amplifier, 30MHz-6GHz, Noise Figure:3.0dB, Gain:35dB,P1dB:15dBm,+12V DC,Without Heatsink	Rev.1.1
TLLA30M6G-35-30-HS	Low Noise Amplifier, 30MHz-6GHz, Noise Figure:3.0dB, Gain:35dB,P1dB:15dBm,+12V DC,With Heatsink	Rev.1.1

典型曲线 Typical Performance Data:

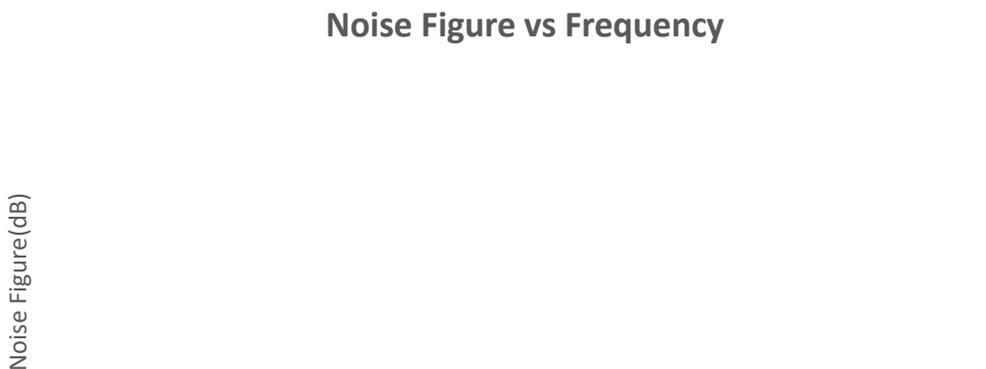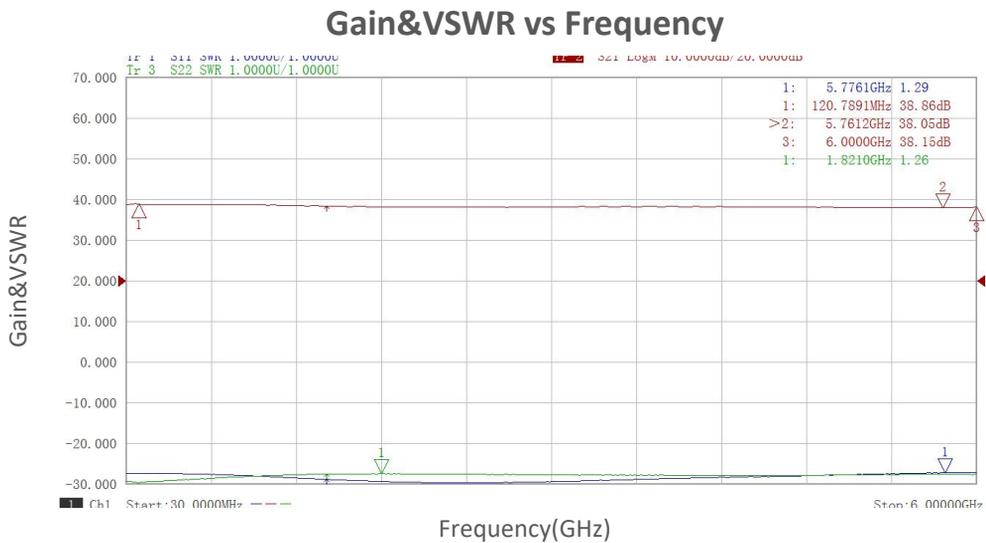


典型曲线 Typical Performance Data:

Gain vs Output Power

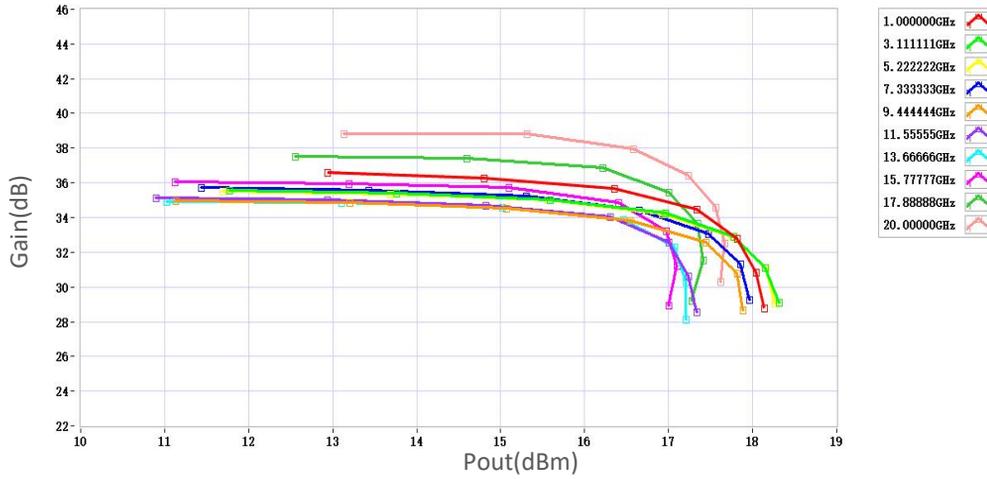


P1dB vs Frequency

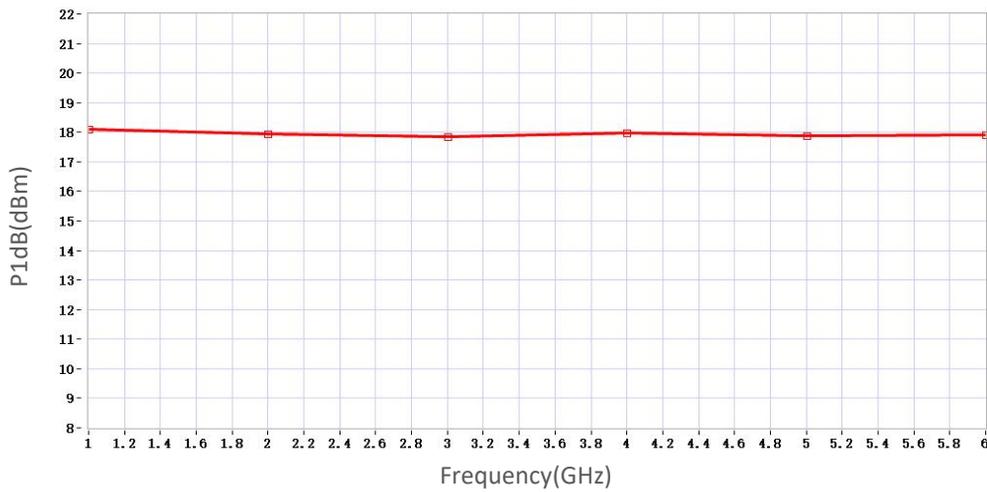

P3dB vs Frequency



典型曲线 Typical Performance Data:

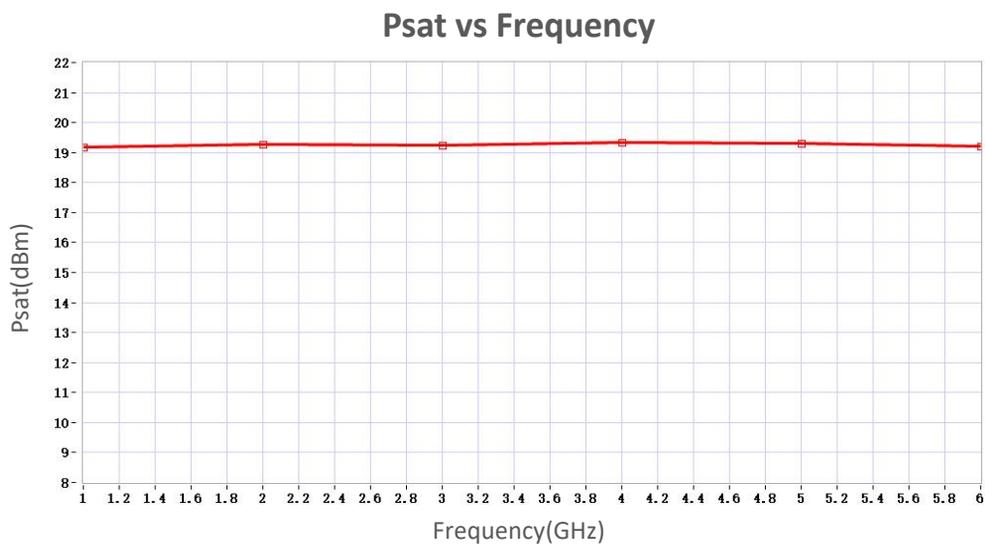

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.