

## Low Noise Amplifier

35-50GHz/2.5dB NF/44dB Gain/12dBm P1dB

Model: TLLA35G50G-44-20

TLLA35G50G-44-20 is a low noise amplifier with a typical small signal gain of 44 dB and a nominal noise figure of 2.5 dB across the frequency range of 35 to 50 GHz. The DC power requirement for the amplifier is +8 V DC/25 mA. The input and output port configuration offers coax adapter structure with 2.4mm female.

### Features:

- Frequency range: 35-50GHz
- Gain: 44dB Typ
- Noise Figure: 2.5dB Typ
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Communication systems

## 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	35		50	GHz
小信号增益 Small Signal Gain	40	44		dB
增益平坦度 Gain Flatness		±2.0	±3.0	dB
噪声系数 Noise Figure		2.5	3	dB
线性输出功率 Output P1dB		12		dBm
输入驻波 Input VSWR		2	3	:1
输出驻波 Output VSWR		2	3	:1
直流电压 DC Voltage		+8	+12	V DC
直流电流 DC Supply Current		25		mA
阻抗 Impedance		50		Ohms


## 机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.4mm Female/2.4mm Female	
直流偏置 DC Bias	Solder Pin	

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+12 V
输入功率 RF Input Power	0 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

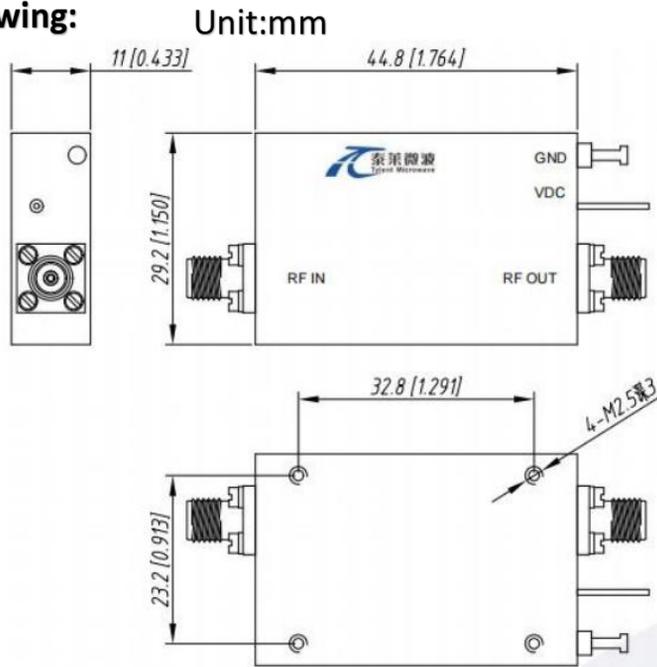

**\*\*\*Heat Sink Required During Operation**



ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-40		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude		50,000		feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			

### 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLLA35G50G-44-20	Low Noise Amplifier, 35-50GHz, Noise Figure:2.5dB, Gain:44 dB,P1dB:12dBm,+8V DC,Without Heatsink	Rev.1.1
TLLA35G50G-44-20-HS	Low Noise Amplifier, 35-50GHz, Noise Figure:2.5dB, Gain:44 dB,P1dB:12dBm,+8V DC,With Heatsink	Rev.1.1

### 典型曲线 Typical Performance Data:

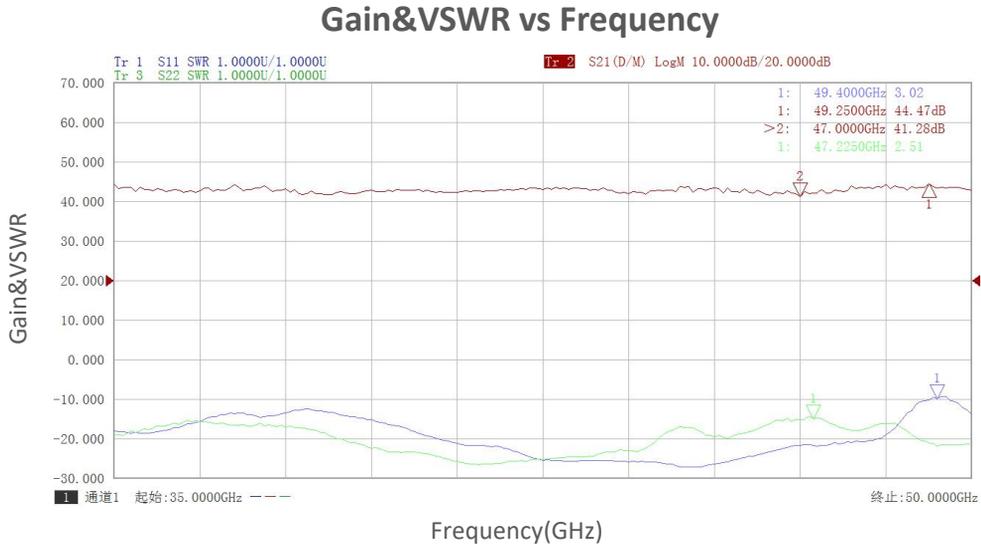


#### Noise Figure vs Frequency

Noise Figure(dB)

典型曲线 Typical Performance Data:

Gain vs Output Power

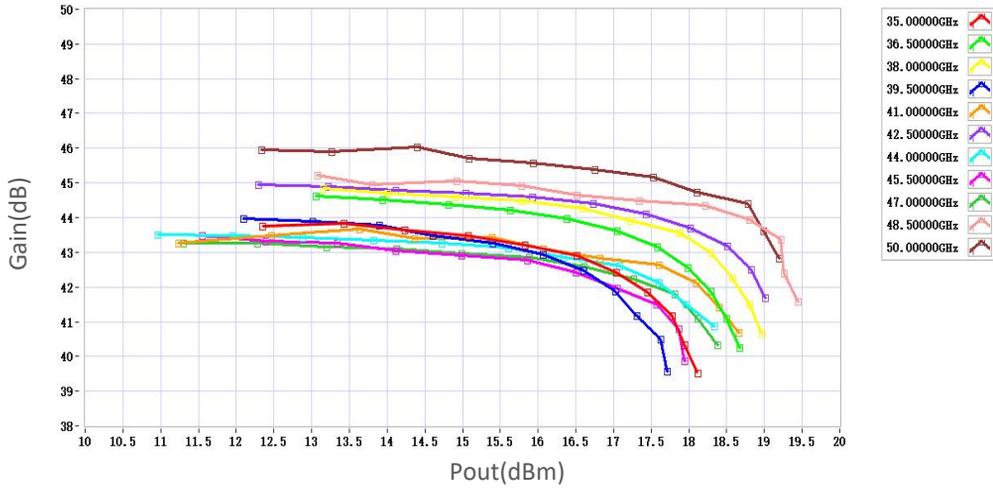

P1dB vs Frequency



Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.