

## Power Amplifier

1-6GHz /51dB Gain/51 dBm Psat

Model: TLPA1G6G-57-51

TLPA1G6G-57-51 is a power amplifier with a typical small signal gain of 51 dB and Psat of 51 dBm across the frequency range of 1 to 6 GHz. The DC power requirement for the amplifier is +28~30 VDC/20 A. The input and output port configuration offers coax adapter structure with SMA female .

### Features:

- Ultra Wide Band: 1-6 GHz
- Gain: 51dB Min
- Output Power Psat: 51dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

### 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		1-6		GHz
小信号增益 Small Signal Gain	51	54		dB
增益平坦度 Gain Flatness		±2	±4	dB
线性输出功率 Output P1dB	49	50		dBm
饱和输出功率 Output Psat	51	52		dBm
谐波 Harmonic		13		dBc
杂散 Spurious		-60		dBc
输入驻波 Input VSWR		1.5	2.5	:1
最大输入功率 Input Max Power(no damage)			5	dBm
直流电压 DC Voltage	28		30	V DC
直流电流 DC Supply Current		15	20	A
阻抗 Impedance		50		Ohms

## 机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
材料 Material	Aluminium	
色装密封 Package Sealing	With air cooling	
尺寸 Size	240*220*185	mm
重量 Weight	4	Kg

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	TBD
输入功率 RF Input Power	+5 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm

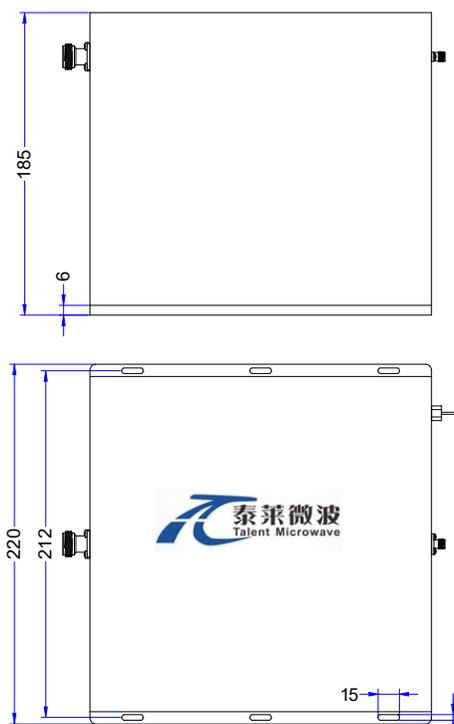

## 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-25		+85	°C
存储温度 Non-operating Temperature*	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

\*Note: For a wider temperature range, please consult the manufacturer.

## 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TLPA1G6G-57-51	Power amplifier 1-6GHz,Gain:51dB,Psat:51dBm, +28V DC,Without Heatsink	Rev.1.1
TLPA1G6G-57-51-HS	Power amplifier 1-6GHz,Gain:51dB,Psat:51dBm, +28V DC,With Heatsink	Rev.1.1