

Power Amplifier

26.5-40GHz /47dB Gain/47 dBm Psat

Model: TLPA26.5G40G-47-47

TLPA26.5G40G-47-47 is a power amplifier with a typical gain of 47 dB and a nominal Psat of 47 dBm across the frequency range of 26.5 to 40 GHz. The DC power requirement for the amplifier is +22 VDC/30 A. The input and output port configuration offers coax adapter structure with 2.92mm Female/WR28.

Features:

- Ultra Wide Band: 26.5-40GHz
- Gain: 47dB Min
- Output Power Psat: 47dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	26.5-40			GHz
增益 Gain	47			dB
增益平坦度 Gain Flatness		±4.5		dB
饱和输出功率 Output Psat	47			dBm
杂散 Spurious			-50	dBc
输入驻波 Input VSWR		2	2.5	:1
直流电压 DC Voltage		+22	+24	V DC
直流电流 DC Supply Current			30	A
阻抗 Impedance	50			Ohms

机械特性 Mechanical Specifications:


参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	2.92mm Female/WR28	
DC加电接口 DC Power Interface	SUB-5W5	
控制及检测接口 Control and Test Connector	J30J-9ZKP	
正向/反向耦合 Forward/Reverse Coupling Connector	2.92 Female/2.92 Female	
尺寸 Size	300*264*85	mm
重量 Weight	10	Kg

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+24V
输入功率 RF Input Power	10dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing:

Unit:mm

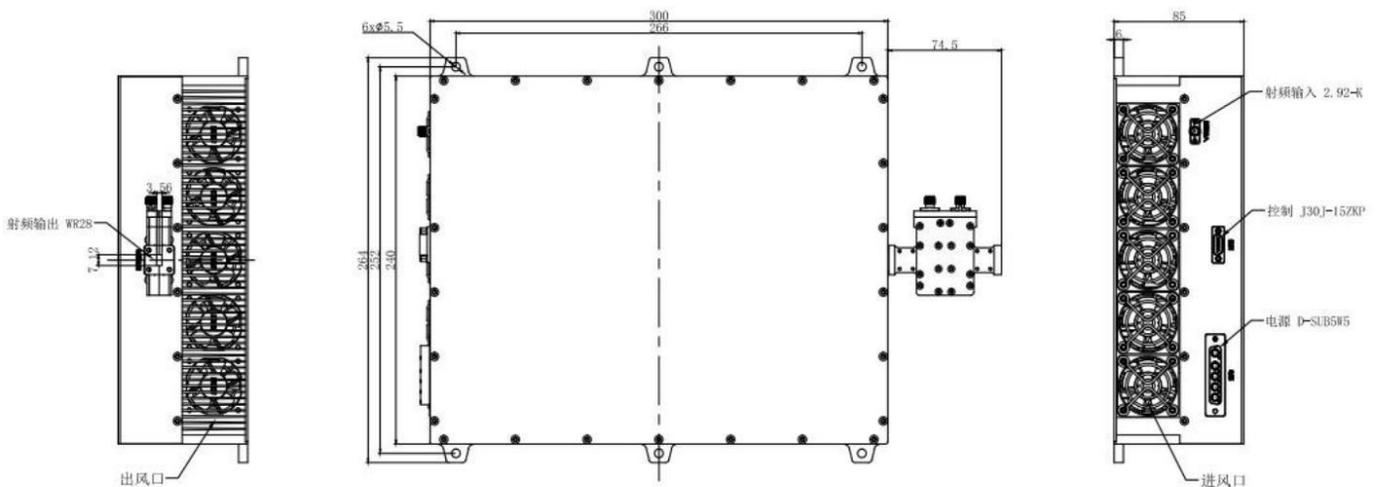

SUB-2W2 Define	
引脚 Pin	功能 Function
A1-A2	+24V
A3-A5	+24V
Pin1	TTL(high for open,low for close)
Pin2	Current Monitor
Pin3	Temperature Monitor
Pin4	0.5dB Attenuation
Pin5	1dB Attenuation
Pin6	2dB Attenuation
Pin7	4dB Attenuation
Pin8	8dB Attenuation
Pin9	16dB Attenuation
Pin10-15	GND

温度环境 Environmental Conditions:


参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	0		+40	°C
存储温度 Non-operating Temperature*	-45		+65	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	20g,11ms,saw-tooth			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			

*Note: For a wider temperature range, please consult the manufacturer.


订货信息 Ordering Information:

典型曲线 Typical Performance Data:

Input VSWR vs Frequency

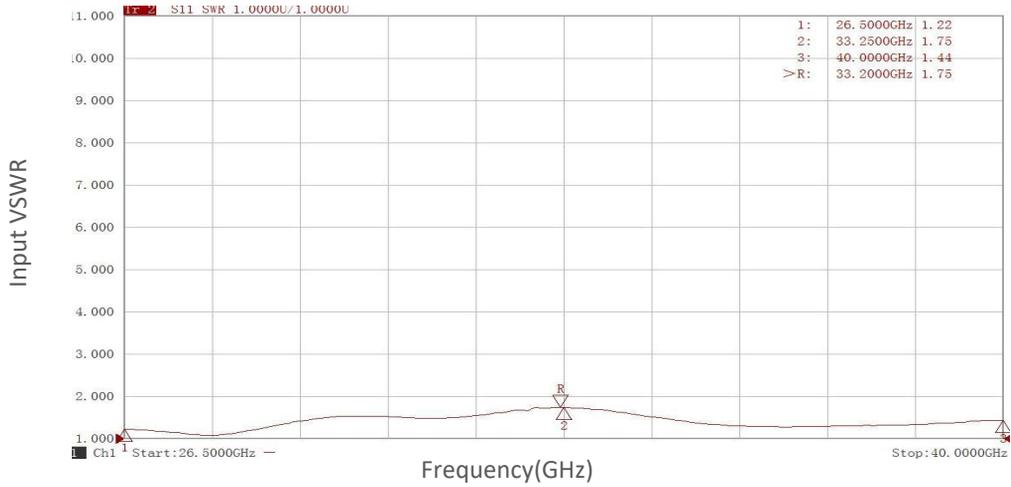

Gain vs Frequency

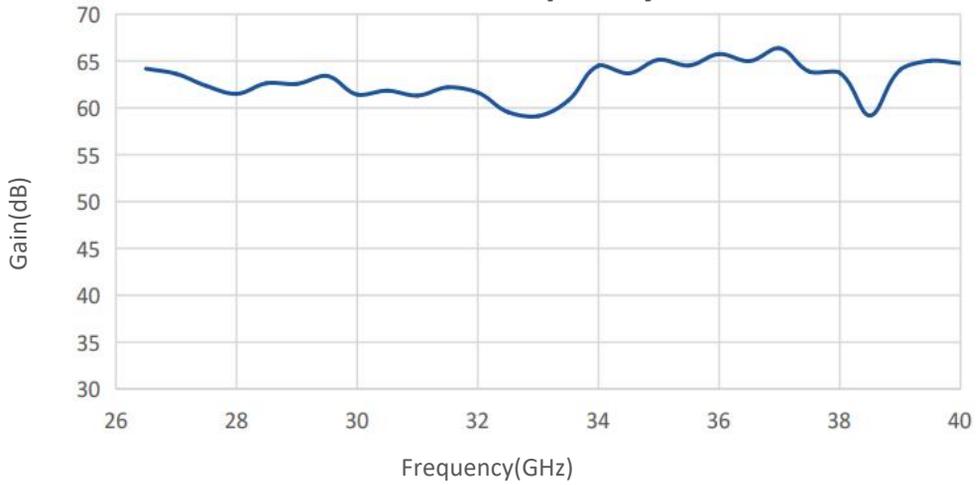


P1dB&P3dB vs Frequency


P1dB&p3dB(dBm)

典型曲线 Typical Performance Data:

Spurious vs Frequency

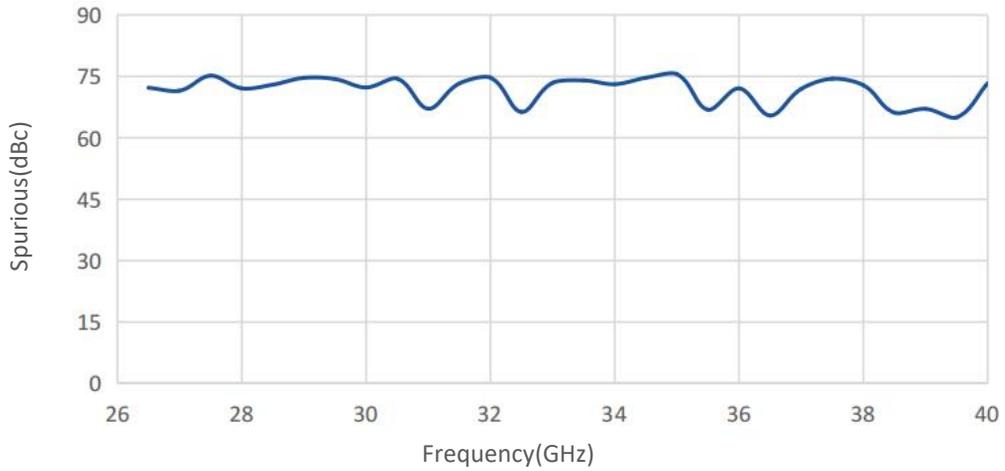

Pout@Pin

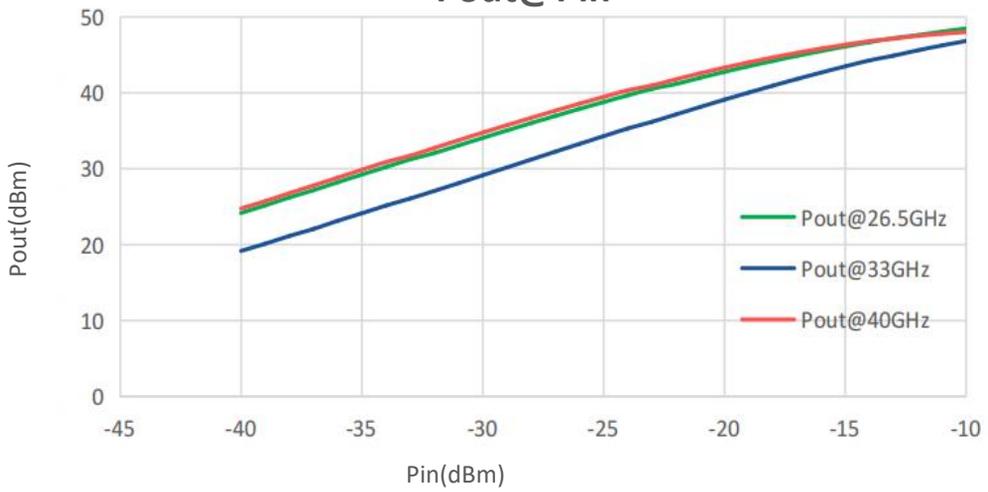

Pout@Equal_Pin

Plout(dBm)