

## 50-350MHz, Gain:33dB, Psat:33dBm

### Feature:

- Ultra Wide Band: 50-350MHz
- Gain: 33dB Min
- Psat Output Power: 33 dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

### 电气特性 Electrical Specifications:

参数Parameter	Min	Typ	Max	单位Units
频率范围 Frequency range	50-350			MHz
增益 Gain	33	35		dB
增益平坦度 Gain Flatness		±1	±2	dB
饱和输出功率 Output Psat	33	34		dBm
输入驻波 Input VSWR			1.5	:1
直流电压 DC Voltage		+12		V DC
直流电流 DC Supply Current	1000			mA
阻抗 Impedance	50			Ohms

### 机械特性 Mechanical Specifications:


参数Parameter	指标 Value	单位Units
输入输出接口 Input /Output Connector	SMA Female/SMA Female	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	120*87*24	mm
重量 Weight	200	g

### 绝对最大值 Absolute Maximum Ratings:

参数Parameter	指标 Value
输入功率 RF Input Power	0dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V



Unit: mm

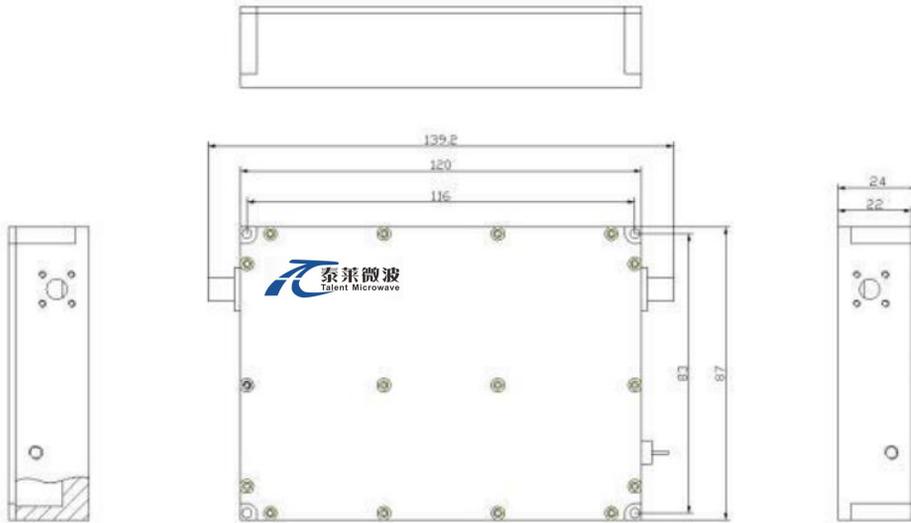

### \*\*\*Heat Sink Required During Operation




#### 温度环境 Environmental Conditions:

参数Parameter	Min	Typ	Max	单位Units
操作温度 Operating Temperature	-45		+85	°C
存储温度 Non-operating Temperature	-55		+125	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


#### 订货信息 Ordering Information:

标准型号 Part Number	描述 Description	版本号Revision
------------------	----------------	-------------


## Input VSWR vs Frequency

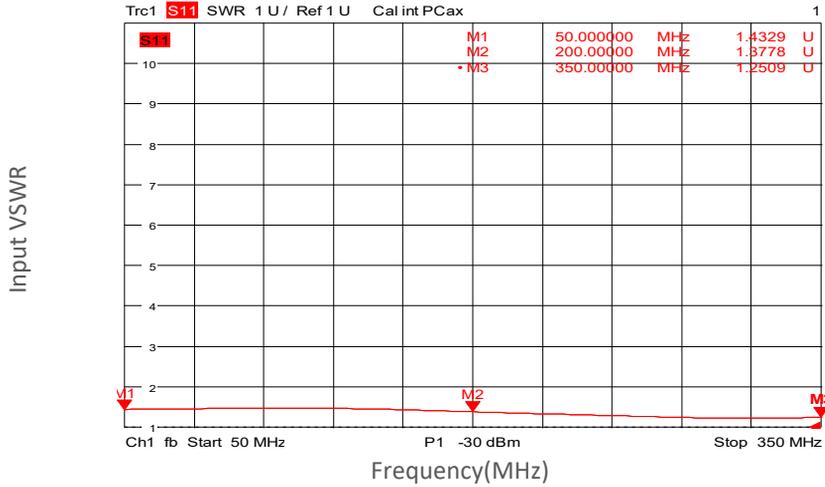


## Gain vs Frequency

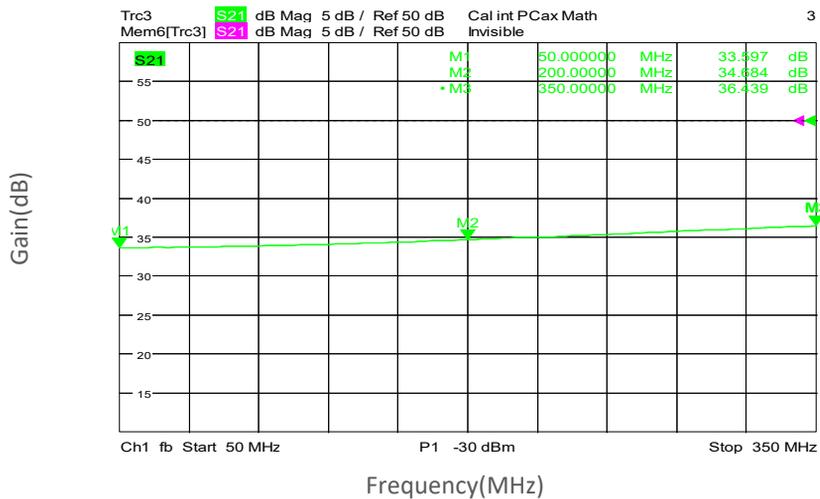


## Gain vs Output Power

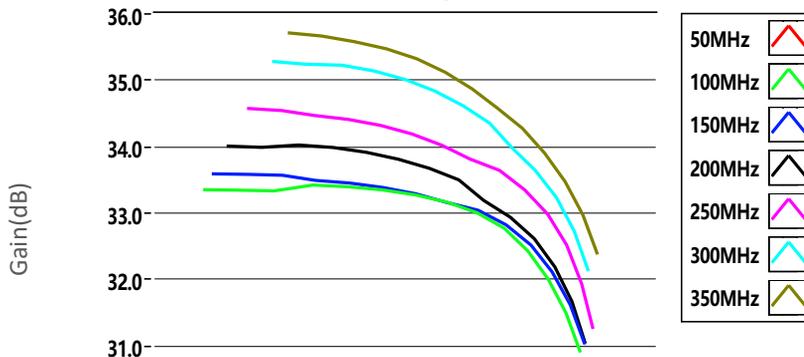


### P1dB&P3dB vs Frequency

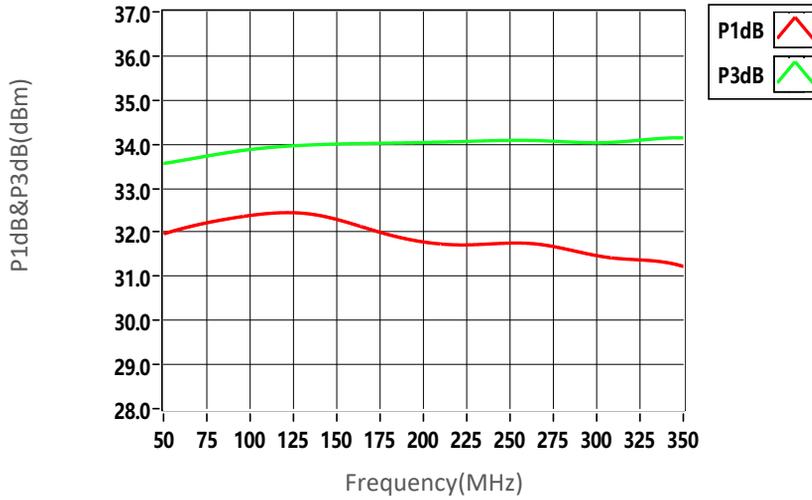

### Psat vs Frequency

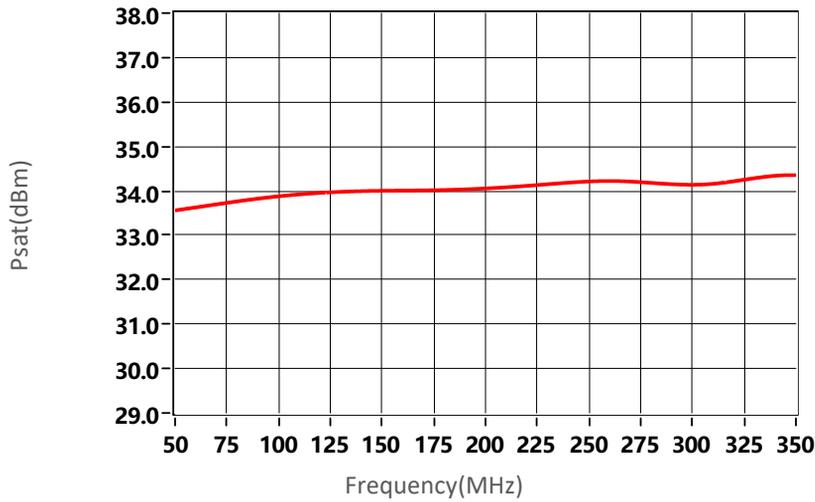

### 2nd Harmonics vs Output Power

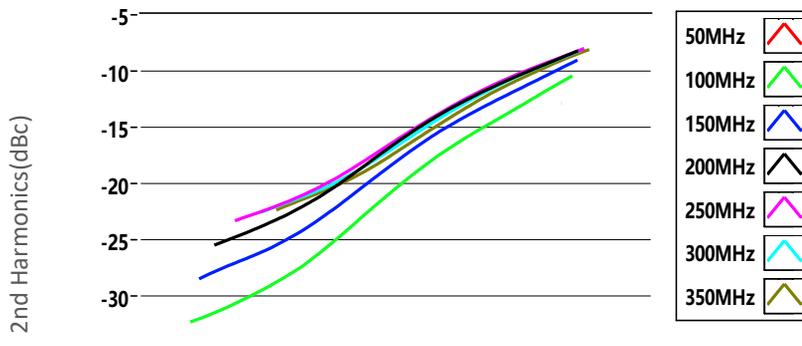

### 3rd Harmonics vs Output Power

