

J-Band Receiver Extender 220-330GHz /WR-03

Model: TLRE-220330

TLRE-220330 Transmit extenders are a dedicated Test & Measurement solution for extending the range of your Vector Network Analyzer (VNA) to 220-330 GHz.

Features:

- Ultra Wide Band: 220-330 GHz
- Conversion loss: 16 dB Typ
- Unconditional stability

Applications:

- Receiver Extension
- Antenna measurements
- Material characterisation

Electrical Characteristics:


Parameter	Min	Typ	Max	Units
RF Input Frequency	220		330	GHz
LO Input Frequency	9.16		13.75	GHz
IF Output Frequency	DC		30	GHz
LO Input Power	+3	+5	+7	dBm
RF Input Power		-10	0	dBm
Conversion loss		16		dB
Multiplication Factor		24		

Absolute Maximum Ratings :

Description	Parameter	Units
RF Port Damage Level	0	dBm
LO Port Damage Level	+10	dBm
ESD sensitivity (HBm)	Class 0, passed 150V	
Supply Bias AC Voltage	+240 V AC	

Outline Drawing(Attenuator optional):

Unit:mm

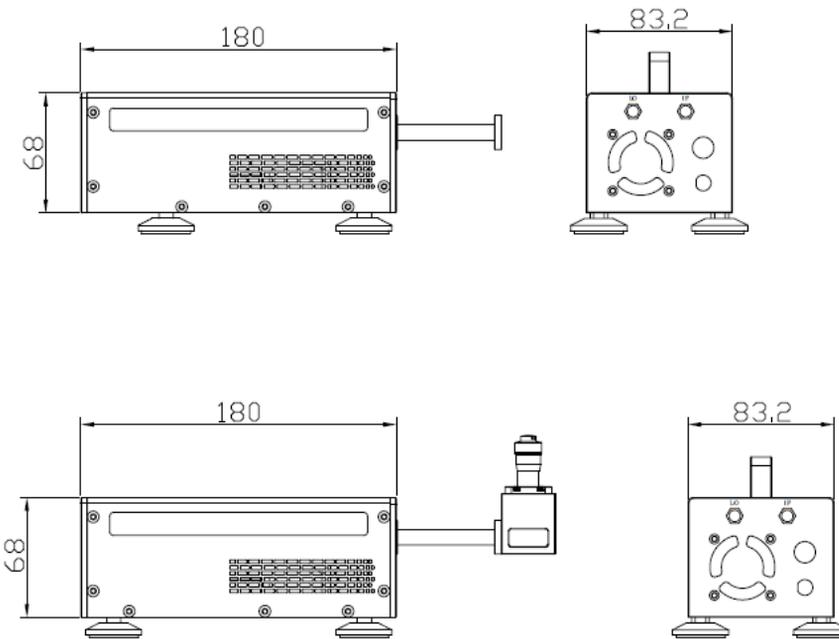

Block Diagrams:

Environmental And Physical Characteristics:

Description	Parameter	Units
Operating Temperature	0 To +45	°C
Storage Temperature	-55 to +125	°C
Material	Al	
Finish	Gray spray paint	
Size	180*83.2* 68mm	

Connector Information:

Parameter	Value
RF Input Connector	WR-03/UG-387
LO Input Connector	SMA Female
IF Output Connector	2.92mm Female
Power Supply Pin	FGG 0B 4 Core

Ordering Information:

Part Number	Description	Revision
TLRE-220330	J-band Receiver,220-330 GHz, Conversion Loss: 16dB typ.	Rev.1.1

Components Included:

Part Number	Description	Quantity
TLACTDC-22012	AC-to-DC Power Adapter	1 PCS
Attenuator optional	220-330GHz	1 PCS