

## Power Amplifier

WR-12/71-76GHz/20dB Gain/26dBm Psat

TMPA-071076-2026-12

TURPA-071076202612 is a power amplifier with a typical gain of 20 dB and a nominal Psat of 26 dBm across the frequency range of 71 to 76 GHz. The DC power requirement for the amplifier is +12 VDC/400 mA. The input and output port configuration offers an inline structure with WR-12 waveguides and UG-387/U-M anticocking flanges.

### Features:

- Frequency range: 71-76GHz
- Gain: 20dB Typ
- Output Power Psat: 26dBm Typ
- Good Power and Gain Flatness

### Applications:

- Passive Imaging
- Communication Systems
- Radar Systems

### 电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range		71-76		GHz
增益 Gain		20		dB
饱和输出功率 Output Psat		26		dBm
输入驻波 Input VSWR		1.6		:1
输出驻波 Output VSWR		1.6		:1
直流电压 DC Voltage		12		V DC
直流电流 DC Supply Current		400		mA

### 机械特性 Mechanical Specifications:





参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	WR-12/UG-387/U	
直流偏置 DC Bias	Solder Pin	
尺寸 Size	40*87*67 (With heatsink)	mm

## 绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+15 V
输入功率 RF Input Power	+20 dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

## 外形图 Outline Drawing:

Unit:mm

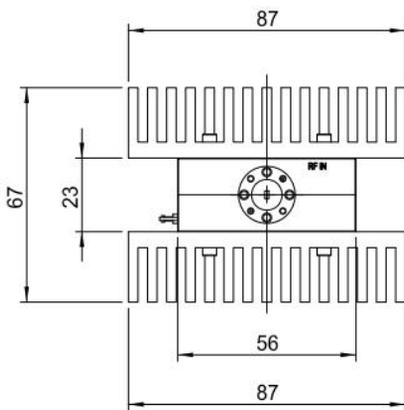

ESD Protection: Strictly adhere to ESD precautions to prevent electrostatic damage.


### 温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature	-10		+65	°C
存储温度 Non-operating Temperature	-45		+85	°C
相对湿度 Relative humidity		95		%
海拔 Altitude	10,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


### 订货信息 Ordering Information:

标准型号 Base Number	描述 Description	版本号 Revision
TURPA-071076202612	Power Amplifier, 71-76GHz, Gain: 20dB Type, P <sub>sat</sub> : 26dBm Type, +12V DC,WR-12	Rev.1.1

### 典型曲线 Typical Performance Data:

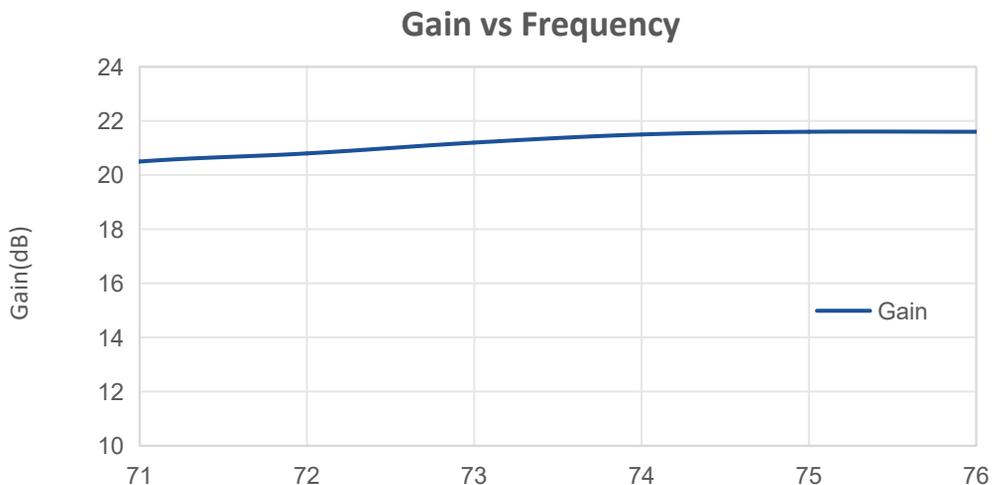

## 典型曲线 Typical Performance Data:

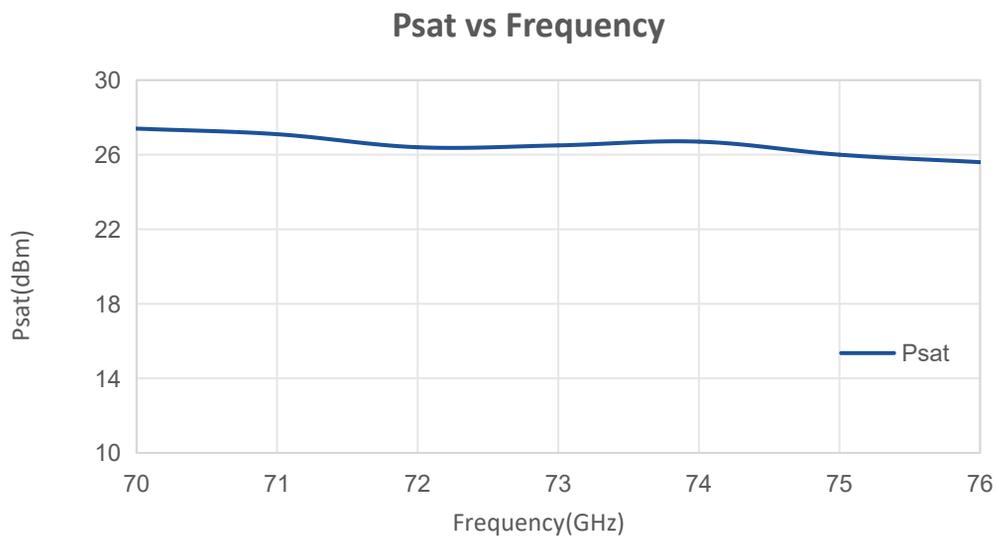

Note: Above data is for ref only, actual data may vary from unit to unit depending on operating environment and other factors like material lots etc.