

Power Amplifier
0.5-3GHz /47 dB Gain/47 dBm Psat

TLPA0.5G3G-47-47

TURPA0.5G3G-4747 is a power amplifier with a typical small signal gain of 47 dB and Psat of 47 dBm across the frequency range of 0.5 to 3 GHz. The DC power requirement for the amplifier is +32 VDC/10A. The input and output port configuration offers coax adapter structure with SMA Female.

Features:

- Ultra Wide Band: 0.5-3GHz
- Small Signal Gain: 47dB Min
- Output Power Psat: 47dBm Min
- Good Power and Gain Flatness
- 50 Ohm Matched Input / Output

Applications:

- Cellular
- PCN
- GSM
- ISM
- Lab Test

电气特性 Electrical Characteristics:

参数 Parameter	Min	Typ	Max	单位 Units
频率范围 Frequency range	0.5-3			GHz
增益 Gain	47			dB
增益平坦度 Gain Flatness			±3	dB
饱和输出功率 Output Psat	47			dBm
杂散 Spurious@Pout=50dBm			-65	dBc
谐波 Harmonics@Pout=50dBm			-10	dBc
输入驻波 Input VSWR			1.8	:1
直流电压 DC Voltage		+32	+33	V DC
直流电流 DC Supply Current		10		A
阻抗 Impedance	50			Ohms


机械特性 Mechanical Specifications:

参数 Parameter	指标 Value	单位 Units
输入/输出接口 Input /Output Connector	SMA Female/SMA Female	
DC加电接口 DC Power Interface	Cap Feed	
尺寸 Size	35*40*12	mm
重量 Weight	/	g

绝对最大值 Absolute Maximum Ratings:

参数 Parameter	指标 Value
供电偏置电压 Supply Bias Voltage	+33V
输入功率 RF Input Power	6dBm
ESD灵敏度 ESD sensitivity (HBm)	Class 0, passed 150V

外形图 Outline Drawing: Unit:mm

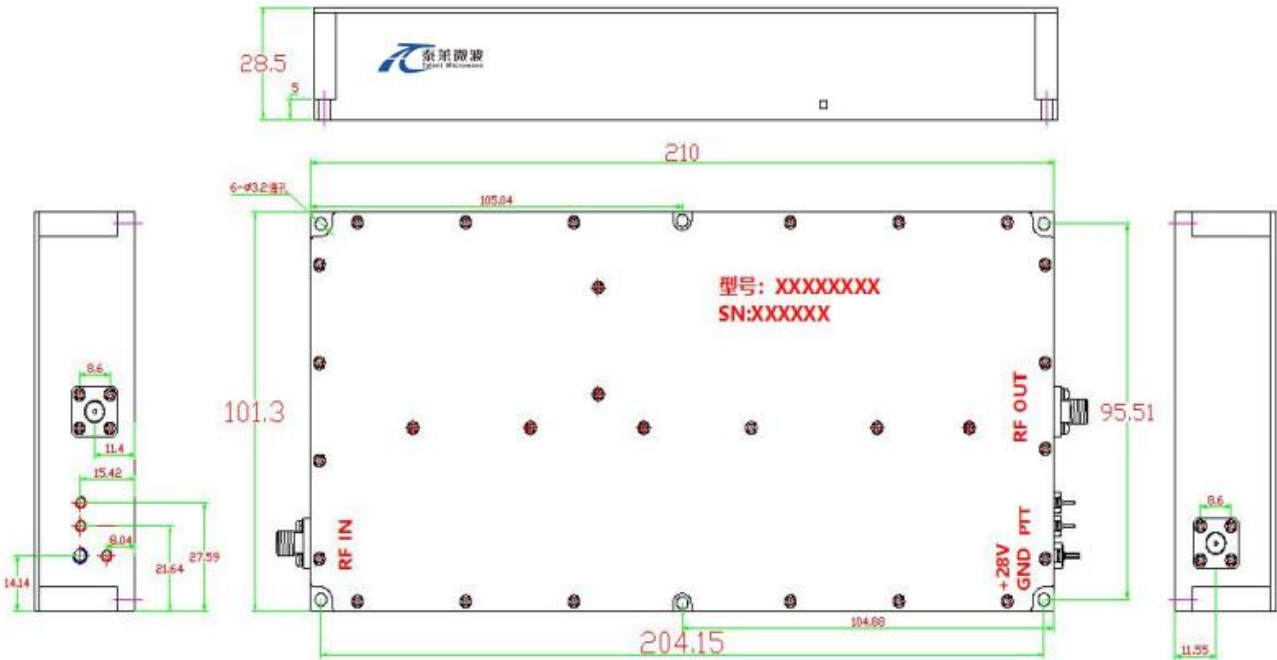



温度环境 Environmental Conditions:

参数 Parameter	Min	Typ	Max	单位 Units
操作温度 Operating Temperature*	-25		+55	℃
存储温度 Non-operating Temperature*	-20		+75	℃
相对湿度 Relative humidity		95		%
海拔 Altitude	50,000			feet
震动 Shock / Vibration(MIL-STD-810F)	25g rms (15 degree 2KHz) endurance, 1 hour per axis			
冲击 Shock(non operating)	20G for 11msc half sin wave,3 axis both directions			


*Note: For a wider temperature range, please consult the manufacturer.

订货信息 Ordering Information:


标准型号 Base Number	描述 Description	版本号 Revision
TURPA0.5G3G-4747	Power amplifier 0.5-3GHz,Gain:47dB,Psat:47dBm,+32V DC,Without Heatsink.	Rev.1.1
TURPA0.5G3G-4747 HS	Power amplifier 0.5-3GHz,Gain:47dB,Psat:47dBm,+32V DC,With Heatsink.	Rev.1.1

典型曲线 Typical Performance Data:

Input VSWR vs Frequency

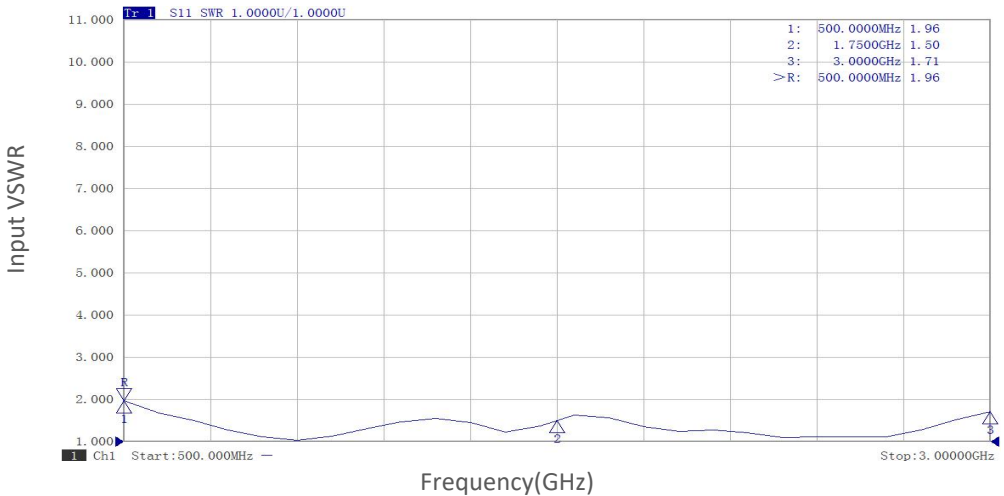

Gain vs Frequency

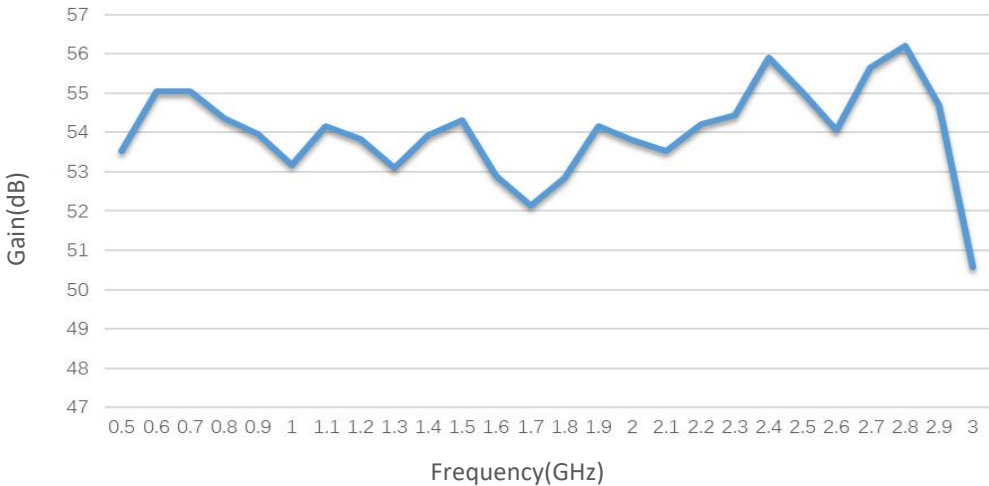


Pout@Equal_Pin


Pout(dBm)

典型曲线 Typical Performance Data:

P1dB vs Frequency

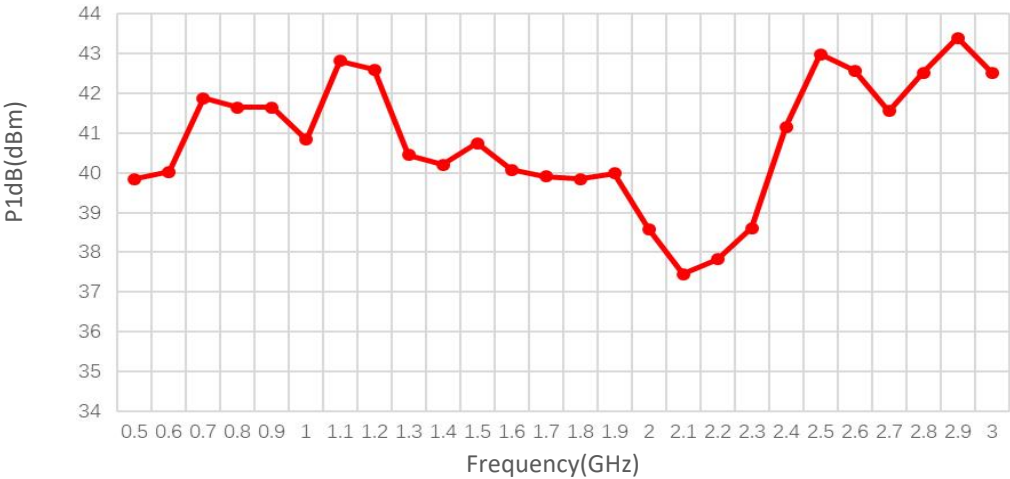

Spurious vs Frequency

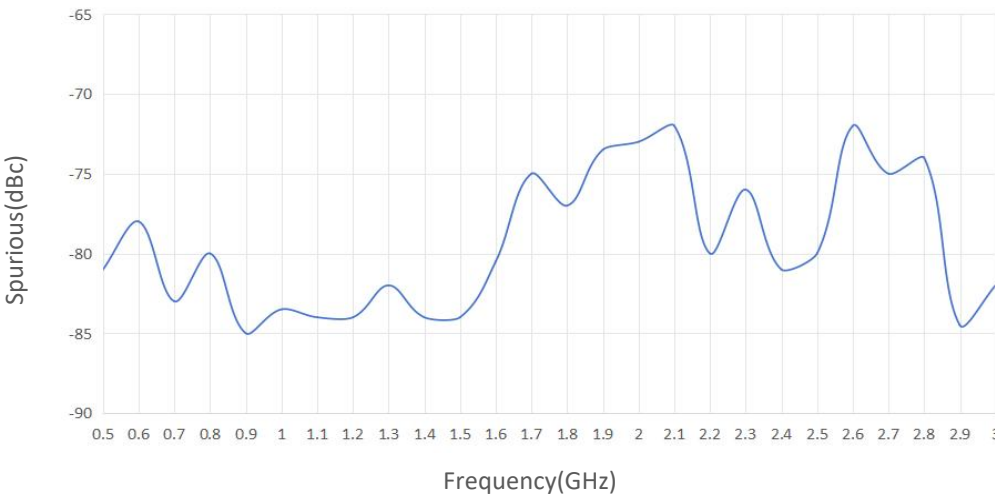

Pout@Pin

Pout(dBm)